




# MARCONI A.C. MAINS VALVES

## PX 4, Super-Power, 20/-

Marconi PX.4 is a super-power output valve for powerful receivers, capable of driving moving coil and large speakers at full volume for dancing, etc., at home and in small halls. When used with moving iron speakers a choke or transformer output is desirable. In many cases 200 volts will be found to provide sufficient volume, as in commercial receivers using this common H.T. potential throughout the set.

### Approx. Operating Data.

| Anode Volts. | Negative Grid Bias Volts. | Average Anode Current in milliamperes. |
|--------------|---------------------------|--|
| 250          | 33                        | 48                                     |
| 200          | 26                        | 40                                     |
| 150          | 16                        | 36                                     |

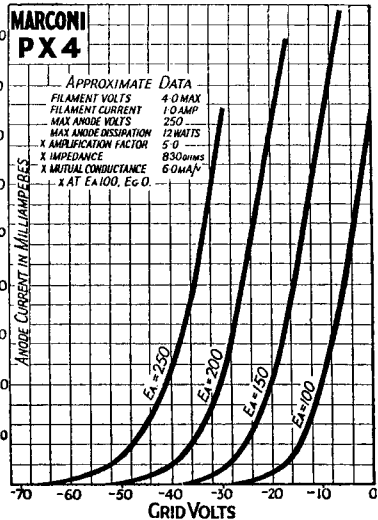

Anode Volts—Anode Current curve for PX 4.

