

SPECIFICATION

Nominal Basket Diameter	15", 381mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	400W
Music Program	800W
Resonance	40Hz
Usable Frequency Range***	48Hz-4kHz
Sensitivity	100.00
Magnet Weight	56 oz.
Gap Height	0.37", 9.53mm
Voice Coil Diameter	2.50", 63.50mm

THIELE & SMALL PARAMETERS

Resonant Frequency (fs)	40Hz
DC Resistance (Re)	6.30
Coil Inductance (Le)	0.64mH
Mechanical Q (Qms)	8.05
Electromagnetic Q (Qes)	0.57
Total Q (Qts)	0.53
Compliance Equivalent Volume (Vas)	270.70 liters / 9.56 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	233.00cc
Mechanical Compliance of Suspension (Cms)	0.26mm/N
BL Product (BL)	13.20 T-M
Diaphragm Mass inc. Airload (Mms)	62 grams
Efficiency Bandwidth Product (EBP)	70.00
Maximum Linear Excursion (Xmax)	2.70mm
Surface Area of Cone (Sd)	864.60 cm2
Maximum Mechanical Limit (Xlim)	11.10mm

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	37.00-42.50 liters/1.30-1.50cu.ft.
Vented	82.00-161.40 liters/2.90-5.70 cu.ft.
Overall Diameter	15.15", 384.80mm
Baffle Hole Diameter	13.87", 352.30mm
Front Sealing Gasket	Fitted as standard
Rear Sealing Gasket	Fitted as standard
Mounting Holes Diameter	0.25", 6.40mm
Mounting Holes B.C.D.	14.56", 369.90mm
Depth	6.05", 154mm
Net Weight	12.30 lbs., 5.60 kg
Shipping Weight	14.40 lbs., 6.50 kg

MATERIALS OF CONSTRUCTION


Aluminum voice coil
 Polyimide former
 Ferrite magnet
 Vented core
 Pressed steel basket
 Paper Cone
 Cloth cone edge
 Solid composition paper dust cap



EMINENCE®
 The Art and Science of Sound

DELTA-15A AMERICAN STANDARD SERIES

Recommended for professional audio as a mid-bass or vocal wedge in a sealed enclosure. Also suitable as a mid-bass or woofer in vented enclosures.

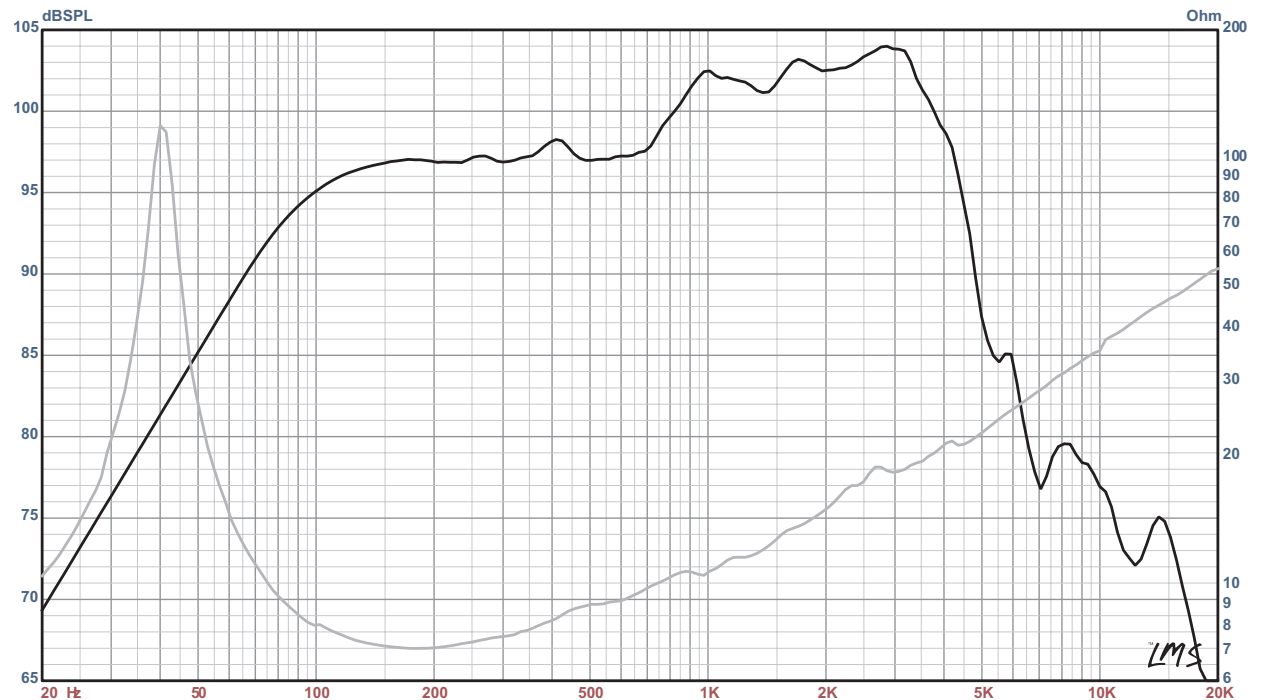

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)