



**Specifications**


**Diameter:** 5.25" (130mm)  
**Sensitivity:** 90.5 dB  
**Power Handling:** 50 Wrms (90W pk)  
**Frequency Response:** 70 ~ 7000 hz  
**Nominal Impedance:** 4 Ohms  
**Voice Coil Diameter:** 1.0" (26mm)  
**Dimensions:**

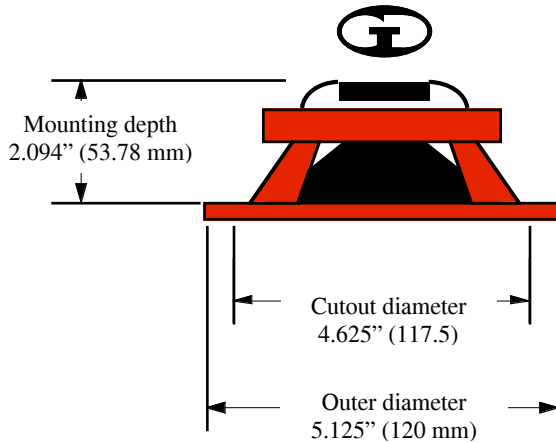

**Rear Volume = 1.0cu. Ft.  
(28.35 liters)**

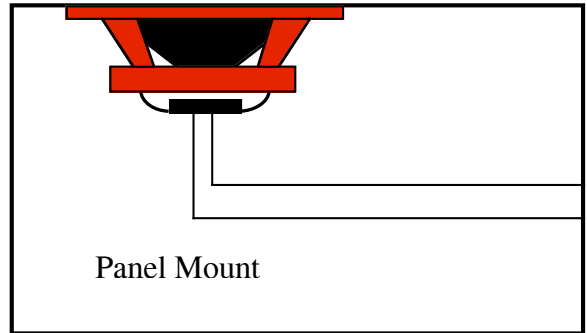

**Door Mount  
Frequency Response @ 10 Watts**

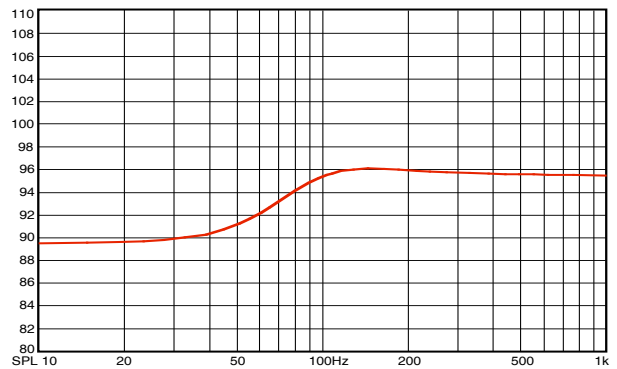

**Thiele-Small Paramters**

**Free Air Resonance:** 88.3 Hz  
**Voice Coil DC Resistance:** 3.76 ohms  
**Voice Coil Inductance @ 1 kHz:** 0.21 mH  
**Mechanical Q (Q<sub>ms</sub>):** 5.67  
**Electrical Q (Q<sub>es</sub>):** 0.95  
**Total Q (Q<sub>ts</sub>):** 0.81  
**Compliance Volume (V<sub>as</sub>):** 3.2 l  
**0.113 ft<sup>3</sup>**  
**Moving mass, Diaphragm:** 11.11 Gr  
**Driver Radiating Area (S<sub>d</sub>):** 88.25 cm<sup>2</sup>  
**13.68 In<sup>2</sup>**  
**Motor Force Factor:** 4.94 Tm

**Note:**

**Free Air use only – mount in rear deck, large door or panel.**