

TRS3122E 1.8 V Low Power Dual RS-232 Transceiver

1 Features

- Extended V_{CC} operating nodes: 1.8 V, 3.3 V, or 5.0 V
 - Unique Tripler Charge Pump Architecture Enables Low V_{CC} of 1.8V While Maintaining Compatibility with 3.3 V and 5 V Supplies
- Integrated Level-Shifting Functionality Eliminates the Need for External Power or Additional Level Shifter While Interfacing with Low-Voltage MCUs
- Enhanced ESD Protection on RIN Inputs and DOUT Outputs
 - ± 15 kV IEC 61000-4-2 Air-Gap Discharge
 - ± 8 kV IEC 61000-4-2 Contact Discharge
 - ± 15 kV Human-Body Model
- Specified 1000-kbps Data Rate
- Auto Powerdown Plus Feature
- Low 0.5uA Shutdown Supply Current
- Meets or Exceeds Compatibility Requirements of RS-232 Interface
- For 2.5 V Single Supply Applications, Consider TRS3318E as an Optimized Solution

2 Applications

- Remote Radio Unit (RRU)
- Base Band Unit (BBU)
- Electronic Point of Sale (EPOS)
- Diagnostics & Data Transmission
- Battery-Powered Equipment

3 Description

The TRS3122E is a two-driver and two-receiver RS-232 interface device, with split supply pins for mixed-voltage operation. All RS-232 inputs and outputs are protected to ± 15 kV using the IEC 61000-4-2 Air-Gap Discharge method, ± 8 kV using the IEC 61000-4-2 Contact Discharge method, and ± 15 kV using the Human-Body Model.

The charge pump requires five small 0.1- μ F capacitors for operation from as low as a 1.8-V supply. The TRS3122E is capable of running at data rates up to 1000 kbps, while maintaining RS-232-compatible output levels.

The TRS3122E has a unique V_L pin that allows operation in mixed-logic voltage systems. Both driver in (DIN) and receiver out (ROUT) logic levels are pin programmable through the V_L pin. This eliminates the need for additional voltage level shifter while interfacing with low-voltage microcontrollers or UARTs.


Auto Powerdown Plus automatically places the device in a low power mode when the device has not received or transmitted data for more than 30 seconds. This feature makes this device a very attractive option for battery powered or other power-sensitive applications.

Device Information⁽¹⁾

PART NUMBER	PACKAGE (PINS)	BODY SIZE (NOM)
TRS3122ERGER	RGE (24)	4.00 mm $\times$ 4.00 mm

(1) For all available packages, see the orderable addendum at the end of the datasheet.

Feature Diagram

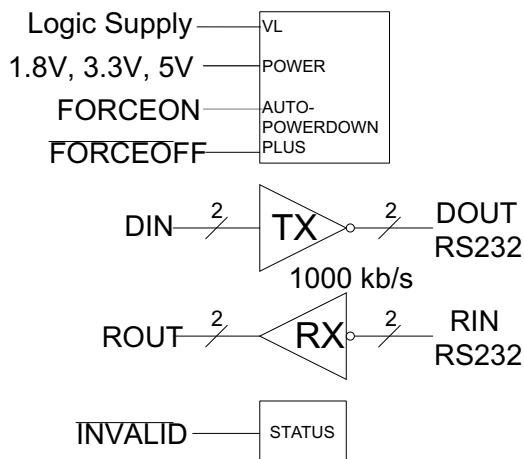

Copyright © 2016, Texas Instruments Incorporated



Table of Contents

1 Features	1	8.1 Overview	12
2 Applications	1	8.2 Functional Block Diagram	12
3 Description	1	8.3 Feature Description	13
4 Revision History	2	8.4 Device Functional Modes	15
5 Pin Configuration and Functions	3	9 Application and Implementation	16
6 Specifications	4	9.1 Application Information	16
6.1 Absolute Maximum Ratings	4	9.2 Typical 1.8-V Application	16
6.2 ESD Ratings	4	10 Power Supply Recommendations	18
6.3 Recommended Operating Conditions	5	11 Layout	19
6.4 Thermal Characteristics	5	11.1 Layout Guidelines	19
6.5 Power and Status Electrical Characteristics	5	11.2 Layout Example	19
6.6 Driver Electrical Characteristics	6	12 Device and Documentation Support	20
6.7 Receiver Electrical Characteristics	6	12.1 Device Support	20
6.8 Driver Switching Characteristics	6	12.2 Community Resources	20
6.9 Receiver Switching Characteristics	7	12.3 Trademarks	20
6.10 Power and Status Switching Characteristics	7	12.4 Electrostatic Discharge Caution	20
6.11 Typical Characteristics	8	12.5 Glossary	20
7 Parameter Measurement Information	9	13 Mechanical, Packaging, and Orderable Information	20
8 Detailed Description	12		

4 Revision History

Changes from Revision B (May 2016) to Revision C Page

• Reordered bullets in <i>Features</i> section by priority	1
• Deleted Data Cables from <i>Applications</i> section of front page to make room for front page image	1
• Changed Corrected swapped ESD levels in description text	1


Changes from Revision A (May 2016) to Revision B Page

• Updated ESD ratings values to reflect current device specifications	4
• Added all Typical Characteristic graphs and schematics to the <i>Typical Characteristics</i> section	8
• Added Application Curve image to <i>Application Curves</i> section	18

Changes from Original (June 2014) to Revision A Page

• Added Pin Functions table.	3
-----------------------------------	---

5 Pin Configuration and Functions

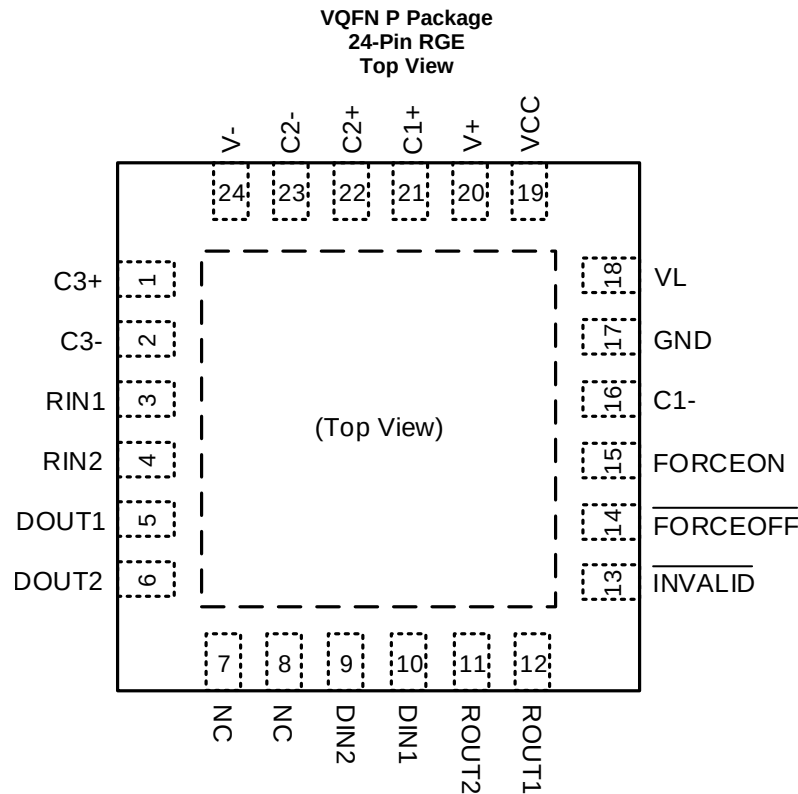

Pin Functions

Pin		I/O	DESCRIPTION
NAME	NO.		
C1+, C2+	21, 22	-	Positive terminals of voltage-doubler charge-pump capacitors (required)
C3+	1	-	Positive terminal of voltage-tripler charge-pump capacitor (Not needed for VCC 3V to 5.5V)
C1-, C2-	16, 23	-	Negative terminals of voltage-doubler charge-pump capacitors (required)
C3-	2	-	Negative terminal of voltage-tripler charge-pump capacitor (Not needed for VCC 3V to 5.5V)
V+	20	-	Positive charge pump storage capacitor (required)
V-	24	-	Negative charge pump storage capacitor (required)
GND	17	-	Ground
V _{CC}	19	-	1.8-V or 3-V to 5-V supply voltage
V _L	18	-	Logic-level supply. All CMOS inputs (DIN) and outputs (ROUT) are referenced to this supply.
$\overline{\text{FORCEOFF}}$	14	I	Auto Powerdown Control input (Refer to Truth Table)
FORCEON	15	I	Auto Powerdown Control input (Refer to Truth Table)
$\overline{\text{INVALID}}$	13	O	Invalid Output Pin
DIN1, DIN2	10, 9	I	Driver inputs
DOUT1, DOUT2	5, 6	O	RS-232 driver outputs
RIN1, RIN2	3, 4	I	RS-232 receiver inputs
ROUT1, ROUT2	12, 11	O	Receiver outputs; swing between 0 and V _L
NC	7, 8	I	Factory pins, can be unconnected or connected to GND

6 Specifications

6.1 Absolute Maximum Ratings⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V _{CC}	Charge pump power supply	−0.3	6	V
V _L	Logic power supply	−0.3	6	V
V+	Positive storage capacitor voltage	−0.3	7	V
V−	Negative storage capacitor voltage	0.3	−7	V
V+ + V− ⁽²⁾			13	V
V _I	FORCEOFF , FORCEON	−0.3	6	V
	DIN	−0.3	V _L + 0.3	
	RIN (0Ω series resistance)		±20	
	RIN (≥250Ω series resistance)		±25	
V _O	DOUT		±13.2	V
	ROUT	−0.3	V _L + 0.3	
T _J	Junction temperature		150	°C
T _{stg}	Storage temperature range	−65	150	°C

- (1) Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
- (2) V+ and V− can have maximum magnitudes of 7 V, but their absolute difference cannot exceed 13 V.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	All pins except RS-232 bus	±2000
			RS-232 bus pins	±15000
	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾		All pins	±500
		IEC 61000-4-2 Air-Gap Discharge	RS-232 bus pins	±15000
		IEC 61000-4-2 Contact Discharge		±8000

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

				MIN	TYP	MAX	UNIT	
V _{CC}	Charge pump power supply			Tripler Mode	1.65	1.8	2	V
				Doubler Mode	3	3.3	3.6	
					4.5	5	5.5	
V _L	Logic power supply			1.65	V _{CC}		V	
R _{IN}	RS-232 Receiver interface			-15	15		V	
D _{OUT}	RS-232 Transmitter interface			-12	12		V	
V _{IL}	GPIO Input logic threshold low	D _{IN} , $\overline{\text{FORCEOFF}}$, FORCEON	V _L = 5.0 V	0	1.7		V	
			V _L = 3.3V	0	1.1			
			V _L = 1.8 V	0	0.6			
V _{IH}	GPIO Input logic threshold high	D _{IN} , $\overline{\text{FORCEOFF}}$, FORCEON	V _L = 5.0V	3.3	V _L		V	
			V _L = 3.3V	2.2	V _L			
			V _L = 1.8V	1.2	V _L			
V _{OZ}	ROUT disabled		$\overline{\text{FORCEOFF}}$ = 0V	0	V _L		V	
Operating temperature				-40	85		°C	

6.4 Thermal Characteristics

THERMAL METRIC		TRS3122E	UNIT
		RGE	
R _{θJA}	Junction-to-ambient thermal resistance	34.2	°C/W
R _{θJCTop}	Junction-to-case (top) thermal resistance	27.2	
R _{θJB}	Junction-to-board thermal resistance	11.4	
ψ _{JT}	Junction-to-top characterization parameter	0.4	
ψ _{JB}	Junction-to-board characterization parameter	11.4	
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	3.6	

6.5 Power and Status Electrical Characteristics

V_{CC} = V_L = (1.65 V to 2.0 V) & (3.0V to 5.5V), T_A = -40°C to 85°C (unless otherwise noted). Typical data is T_A = 25°C, V_{CC} = V_L = 3.3V unless otherwise noted.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
I _{CC} (Static)	DIN1 = GND or V _L ; DIN2 = GND or V _L ; FORCEOFF = V _L FORCEON = V _L	No load	V _{CC} = 1.65V to 2.0V		1.0	1.9	mA
			V _{CC} = 3.0V to 3.6V		0.7	1.4	
			V _{CC} = 4.5V to 5.5V		0.8	1.9	
I _{CC} (off)	FORCEOFF = GND				0.4	10	μA
V _{IT+}	RIN postive voltage threshold for <u>INVALID</u> output change	RIN1 = RIN2		0.3		2.4	V
V _{IT-}	RIN negative voltage threshold for <u>INVALID</u> output change			-2.4		-0.3	
V _{OH}	<u>INVALID</u> high-level output voltage	I _{OH} = -1 mA, FORCEON = GND, <u>FORCEOFF</u> = VL		V _L -0.4	V _L -0.08	V _L	V
V _{OL}	<u>INVALID</u> low-level output voltage	I _{OL} = 1.6 mA, FORCEON = GND, <u>FORCEOFF</u> = VL		0	0.06	0.4	V

6.6 Driver Electrical Characteristics

$V_{CC} = V_L = (1.65\text{ V to }2.0\text{ V}) \text{ \& } (3.0\text{ V to }5.5\text{ V})$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted). Typical data is $T_A = 25^\circ\text{C}$, $V_{CC} = V_L = 3.3\text{ V}$ unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OUT} Output voltage swing	All driver outputs loaded with 3 k Ω to ground C3 = 100 nF, $V_{CC} = 1.8\text{ V}$	± 4.25	± 4.7		V
	All driver outputs loaded with 3 k Ω to ground C3 = 0 F, $V_{CC} = 3.3\text{ V}$ or 5 V	± 5	± 5.4		
r_O Output resistance	($V_{CC} = V_+ = V_- = 0$); Driver output = $\pm 2\text{ V}$	300	10M		Ω
I_{OS} Output short-circuit current	$V_{DOUT} = 0$			± 60	mA
I_{OZ} Output leakage current	$V_{DOUT} = \pm 12\text{ V}$, $\overline{\text{FORCEOFF}} = \text{GND}$	0		± 25	μA
Driver input hysteresis			0.5	1	V
Input leakage current	DIN = GND to V_L ; $\overline{\text{FORCEOFF}} = \text{GND to } V_L$; $\text{FORCEON} = \text{GND to } V_L$		0	± 5	μA

6.7 Receiver Electrical Characteristics

$V_{CC} = V_L = (1.65\text{ V to }2.0\text{ V}) \text{ \& } (3.0\text{ V to }5.5\text{ V})$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted). Typical data is $T_A = 25^\circ\text{C}$, $V_{CC} = V_L = 3.3\text{ V}$ unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{off} Output leakage current	ROUT, receivers disabled		± 0.01	± 10	μA
V_{OL} Output voltage low	$I_{OUT} = 2.0\text{ mA}$		0.04	0.3	V
V_{OH} Output voltage high	$I_{OUT} = -2.0\text{ mA}$	$V_L - 0.3$	$V_L - 0.04$		V
V_{IT-} Input threshold low	$T_A = 25^\circ\text{C}$	$V_L = 5\text{ V}$	0.8	1.5	V
		$V_L = 3.3\text{ V}$	0.7	1.1	
		$V_L = 1.8\text{ V}$	0.6	0.7	
V_{IT+} Input threshold high	$T_A = 25^\circ\text{C}$	$V_L = 5\text{ V}$		2.0 2.4	V
		$V_L = 3.3\text{ V}$		1.5 2.4	
		$V_L = 1.8\text{ V}$		0.9 1.4	
V_{hys} Input hysteresis	$T_A = 25^\circ\text{C}$	$V_L = 5\text{ V}$		0.45	V
		$V_L = 3.3\text{ V}$		0.35	
		$V_L = 1.8\text{ V}$		0.26	
Input resistance	$T_A = -40\text{ to }85^\circ\text{C}$	3	5	7	k Ω

6.8 Driver Switching Characteristics

$V_{CC} = V_L = (1.65\text{ V to }2.0\text{ V}) \text{ \& } (3.0\text{ V to }5.5\text{ V})$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted). Typical data is $T_A = 25^\circ\text{C}$, $V_{CC} = V_L = 3.3\text{ V}$ unless otherwise noted.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Maximum data rate	$R_L = 3\text{ k}\Omega$, $C_L = 500\text{ pF}$ (one driver)	1000			kbps
	$R_L = 3\text{ k}\Omega$, $C_L = 1000\text{ pF}$ (one driver)	500			
Time-to-exit powerdown	$ V_{DOUT} > 3.7\text{ V}$		30	150	μs
$ t_{PHL} - t_{PLH} $ Driver skew ⁽¹⁾	$R_L = 3\text{ k}\Omega$	0	50	100	ns
Transition-region slew rate	$R_L = 3\text{ k}\Omega$ to 7 k Ω , $T_A = 25^\circ\text{C}$ Measured from 3 V to -3 V or -3 V to 3 V	$V_{CC} = 1.8\text{ V}$, $C_L = 200\text{ pF}$	33		V/ μs
		$V_{CC} = 1.8\text{ V}$, $C_L = 1000\text{ pF}$	25		
		$V_{CC} = 3.3\text{ V}$, $C_L = 200\text{ pF}$	38		
		$V_{CC} = 3.3\text{ V}$, $C_L = 1000\text{ pF}$	28		
		$V_{CC} = 5\text{ V}$, $C_L = 200\text{ pF}$	41		
		$V_{CC} = 5\text{ V}$, $C_L = 1000\text{ pF}$	30		

(1) Driver skew is measured at the driver zero crosspoint.

6.9 Receiver Switching Characteristics

$V_{CC} = V_L = (1.65\text{ V to }2.0\text{ V}) \& (3.0\text{ V to }5.5\text{ V})$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted). Typical data is $T_A = 25^\circ\text{C}$, $V_{CC} = V_L = 3.3\text{ V}$ unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PHL}	Receiver propagation delay, high to low	Receiver input to receiver output $C_L = 150\text{ pF}$		0.15	0.4	μs
t_{PLH}	Receiver propagation delay, low to high			0.15	0.4	
$t_{PHL} - t_{PLH}$	Receiver skew			50	300	ns
t_{en}	Receiver output enable time	From $\overline{\text{FORCEOFF}}$ to $R_{OUT} = V_L/2$ $C_L = 150\text{ pF}$, $R_L = 3\text{ k}\Omega$		200	400	ns
t_{dis}	Receiver output disable time			200	400	ns

6.10 Power and Status Switching Characteristics

$V_{CC} = V_L = (1.65\text{ V to }2.0\text{ V}) \& (3.0\text{ V to }5.5\text{ V})$, $T_A = -40^\circ\text{C to }85^\circ\text{C}$ (unless otherwise noted). Typical data is $T_A = 25^\circ\text{C}$, $V_{CC} = V_L = 3.3\text{ V}$ unless otherwise noted.

PARAMETER		MIN	TYP	MAX	UNIT
t_{valid}	Propagation delay time, low- to high-level output		1		μs
$t_{invalid}$	Propagation delay time, high- to low-level output		30		μs
t_{dis}	Receiver or driver edge to auto-powerdown plus	15	30	60	s

6.11 Typical Characteristics

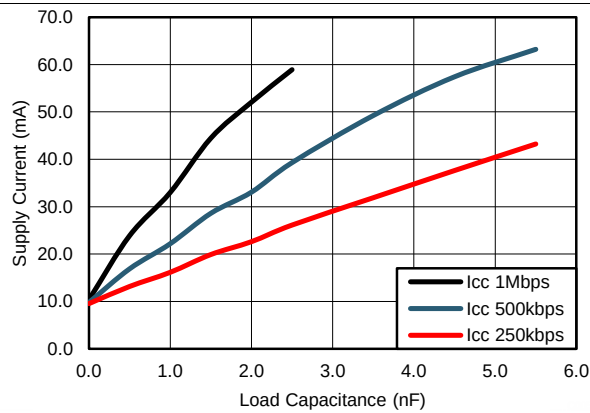


Figure 1. Supply Current vs. Load Capacitance
 $V_{CC} = 3.3\text{ V}$, $V_L = 1.8\text{ V}$, $R_{LOAD} = 3\text{ k}\Omega$, $CH2 = 32\text{ kbps}$

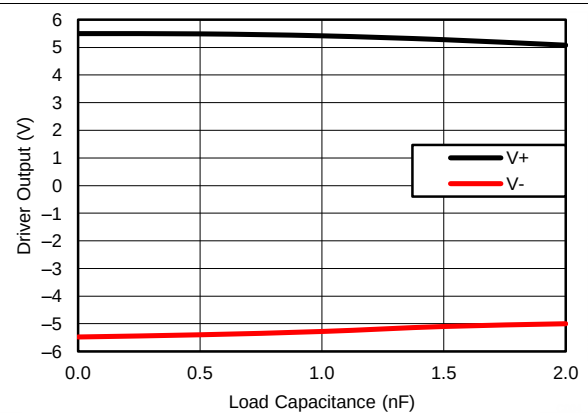


Figure 2. Driver Output vs. Load Capacitance, $V_{CC} = 3.3\text{ V}$
 $V_L = 1.8\text{ V}$, $R_{LOAD} = 3\text{ k}\Omega$, $CH1 = 1\text{ Mbps}$, $CH2 = 32\text{ kbps}$

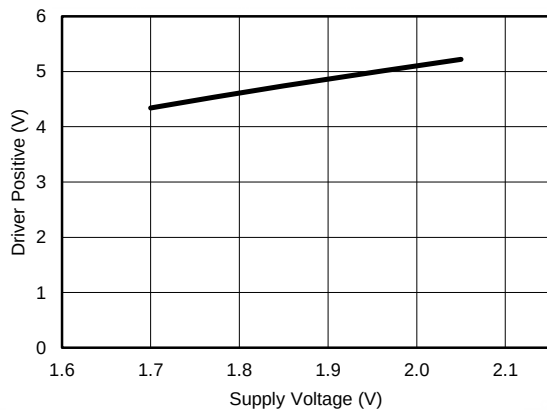


Figure 3. Driver Positive vs. Supply Voltage (Tripler Mode)
 1 Mbps, $R_{LOAD} = 3\text{ k}\Omega$, $C_{LOAD} = 560\text{ pF}$

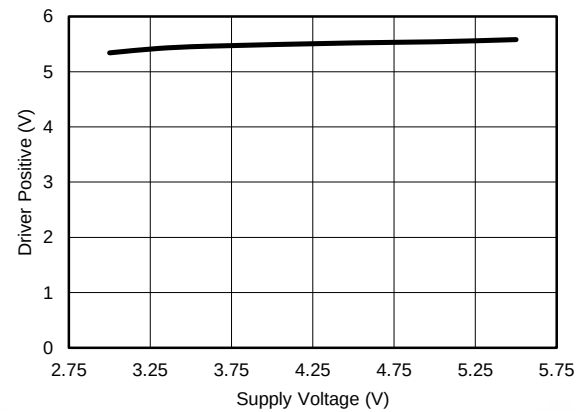


Figure 4. Driver Positive vs. Supply Voltage (Doubler Mode)
 1 Mbps, $R_{LOAD} = 3\text{ k}\Omega$, $C_{LOAD} = 560\text{ pF}$

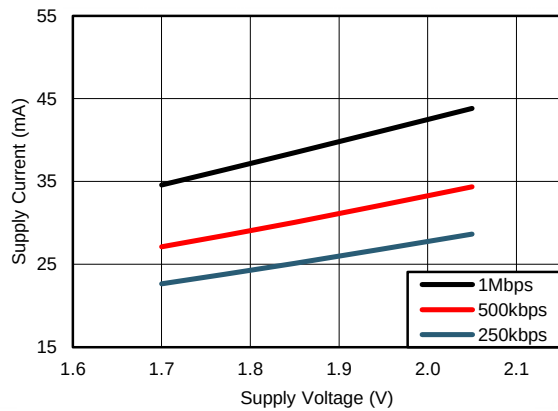


Figure 5. Supply Current vs. Supply Voltage (Tripler Mode)
 $V_L = 1.8\text{ V}$, $R_{LOAD} = 3\text{ k}\Omega$, $C_{LOAD} = 1\text{ nF}$, $CH2 = 32\text{ kbps}$






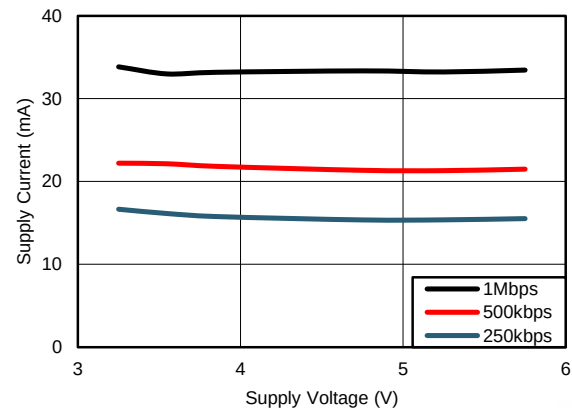


Figure 6. Supply Current vs. Supply Voltage (Doubler Mode)
 $V_L = 1.8\text{ V}$, $R_{LOAD} = 3\text{ k}\Omega$, $C_{LOAD} = 1\text{ nF}$, $CH2 = 32\text{ kbps}$

7 Parameter Measurement Information

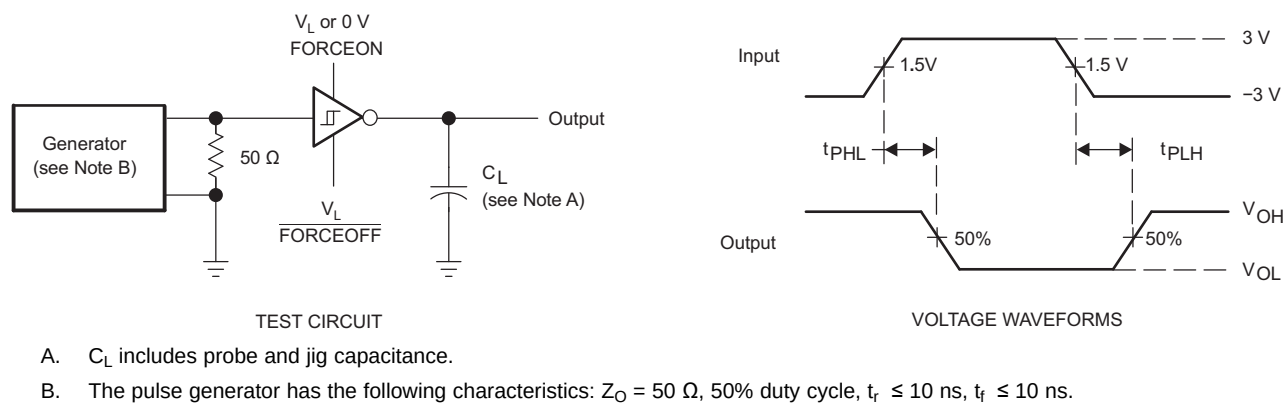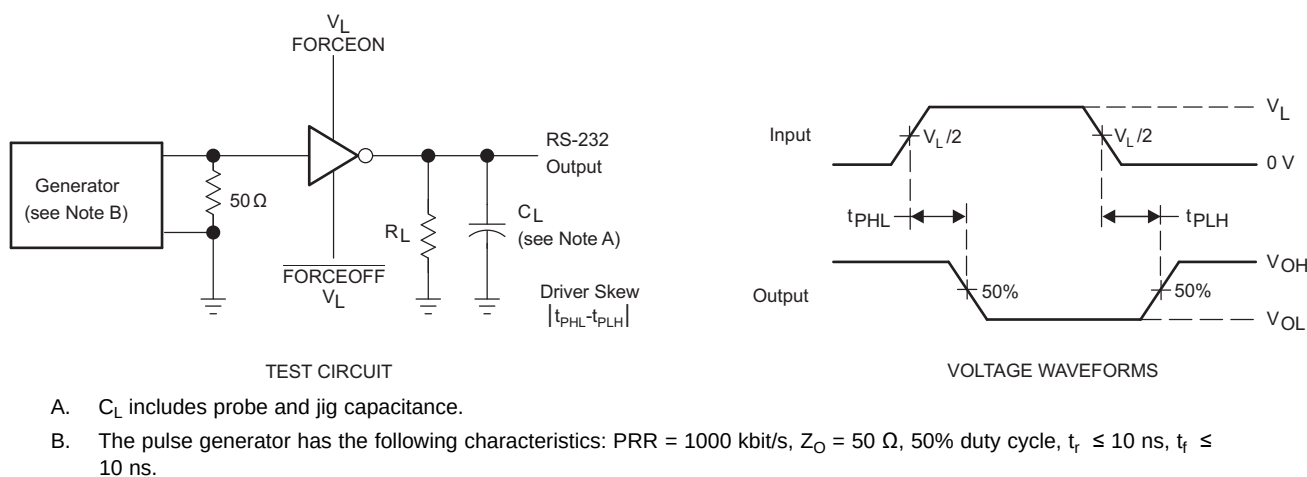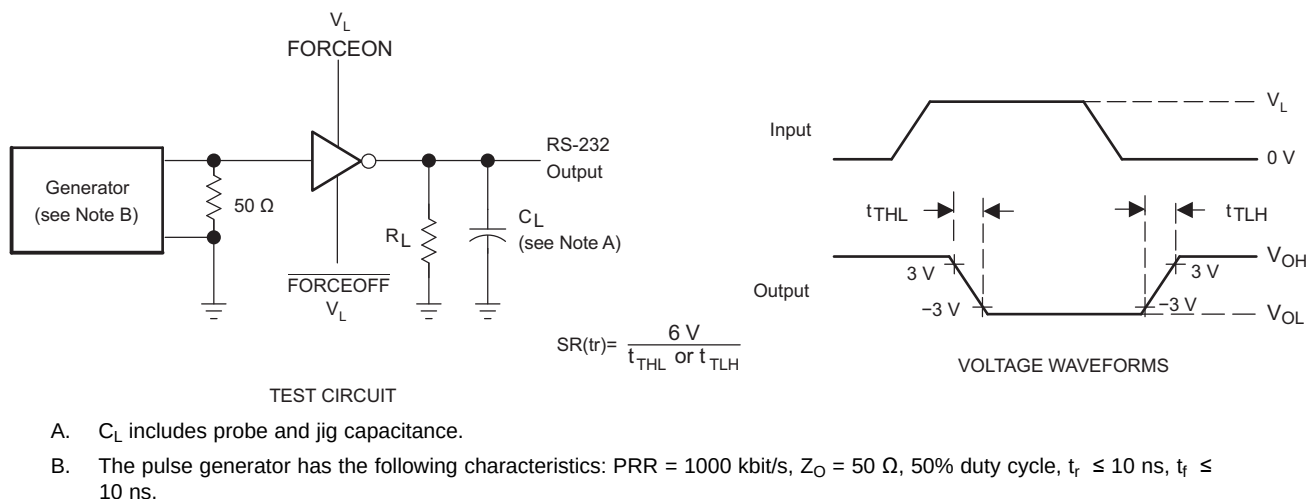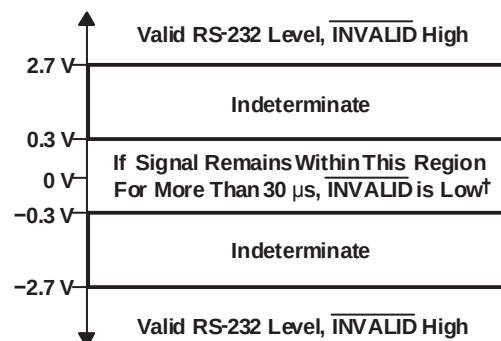

Parameter Measurement Information (continued)

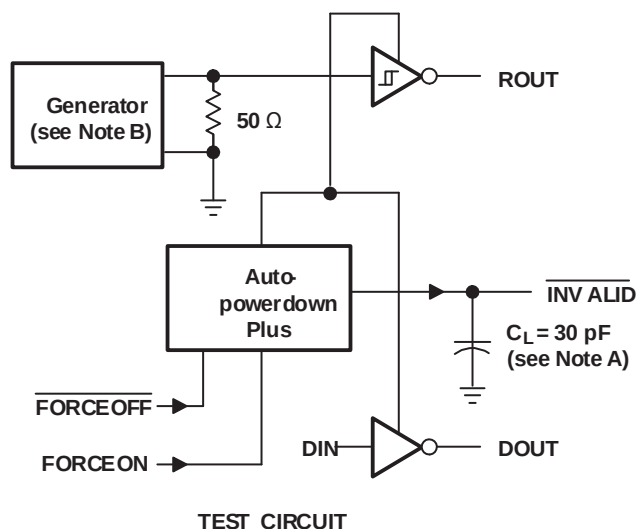

[†] Auto-powerdown plus disables drivers and reduces supply current to 1 μA .

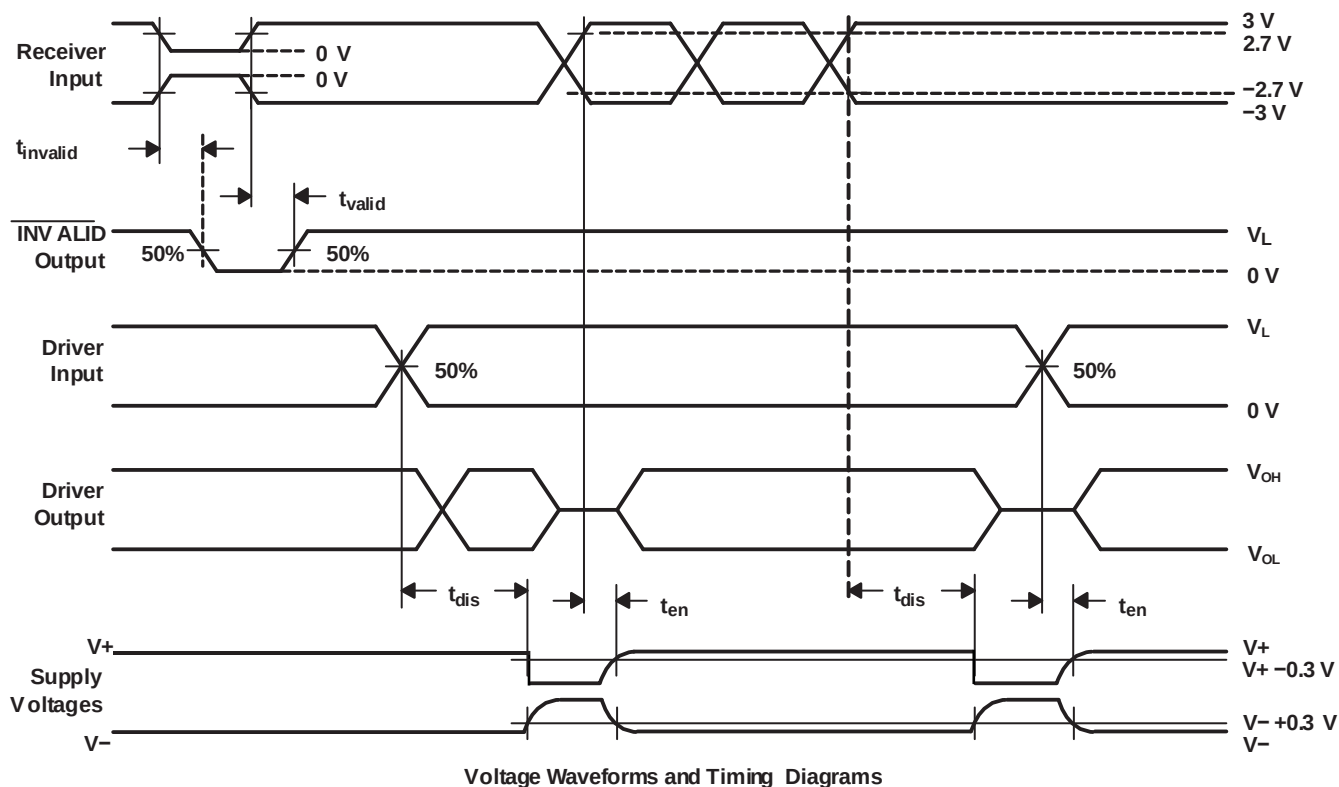


Figure 11. $\overline{\text{INVALID}}$ Propagation-Delay Times and Supply-Enabling Time

8 Detailed Description


8.1 Overview

The TRS3122E is an upgrade to standard RS232 transceivers, offering compatibility with modern system needs like 1.8-V GPIO capability, enhanced ESD & ultra low stand-by current. The majority of RS-232 transceivers with 1.8-V GPIO compatibility require a logic supply pin for the I/O translation, in addition to a minimum 3.3 V V_{CC} for all of the other active circuitry on the chip. Unlike these transceivers, TRS3122E can operate with both V_L and V_{CC} equal to 1.8 V. When V_{CC} = 3.0 V to 5.5 V, the charge pump will sense V_{CC} and switch to doubler mode. C1 & C2 are the necessary flying capacitors, C3 is not needed, and the charge pump outputs V+ & V- will regulate to $\sim\pm 5.4$ V. When V_{CC} = 1.65 V to 2.0 V, the charge pump will sense V_{CC} and switch to tripler mode. C1, C2 & C3 are all necessary, and the charge pump outputs V+ & V- will regulate to $\sim\pm 2.65 \times V_{CC}$ from V_{CC} = 1.65 V to 2.0 V.

With many modern applications expanding into products that use RS232 as a backup communication protocol, it is important for the transceiver to have efficient standby operation. In order to accommodate this, Auto Powerdown Plus has been integrated to shut-off all active circuitry, allowing TRS3122E to achieve an I_{off} of 1 μ A.

In order to comply with common interface system needs and environments, the RS-232 receive and transmit I/O pins comply with IEC 61000-4-2 ratings.

8.2 Functional Block Diagram

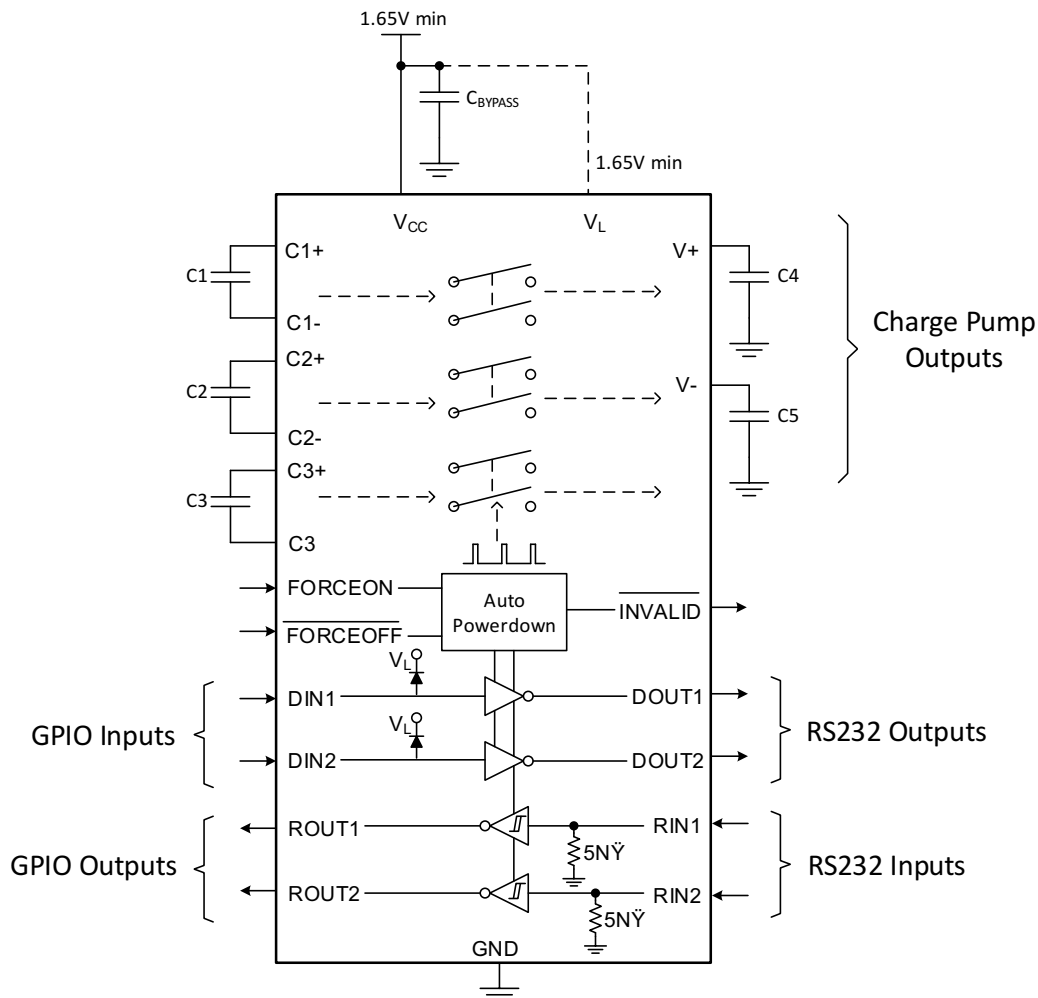

Copyright © 2016, Texas Instruments Incorporated

Figure 12. Schematic

8.3 Feature Description

8.3.1 Charge Pump

The internal power supply consists of a regulated auto-sensing charge pump that provides RS-232 compatible output voltages, over the 1.65 V to 2.0 V and 3.0 V to 5.5 V V_{CC} ranges. The charge pump operates in two modes to efficiently accommodate low voltage (1.8 V) and higher voltage (3.3 V & 5.0 V) supplies.

8.3.1.1 Doubler Mode

The charge pump requires two flying capacitors (C1, C2) and reservoir capacitors (C4, C5) to generate the V+ and V- supplies of approximately ± 5.4 V when V_{CC} is greater than 3 V. When V_{CC} is >2.9 V, TRS3122E will sense the supply voltage level and switch the charge pump to a doubler. Hence, no need for a third flying capacitor. C3+ & C3- pins can be left open for proper operation. If a capacitor is placed between C3+ & C3-, the charge pump will ignore this capacitor and still behave as a doubler.

For capacitor choice recommendations, please refer to [Table 1](#).

8.3.1.2 Tripler Mode

The charge pump requires three flying capacitors (C1, C2 & C3) and reservoir capacitors (C4, C5) to generate the V+ and V- supplies of approximately $\pm 2.65 * V_{CC}$ when V_{CC} is greater than 1.65 V. When V_{CC} is <2.1 V, TRS3122E will sense the supply voltage level and switch the charge pump to a tripler.

For capacitor choice recommendations, please refer to [Table 1](#).

8.3.2 Drivers

The drivers are inverting level transmitters that convert TTL or CMOS logic levels to RS-232 levels. For $V_{CC}=3.0$ V to 5.0 V, the RS-232 output voltage swing is typically ± 5.4 V fully loaded and ± 5 V minimum fully loaded. For $V_{CC} = 1.8$ V, the RS-232 output voltage swing is typically ± 4.7 V fully loaded and ± 4.25 V minimum fully loaded.

The driver outputs are protected against indefinite short-circuits to ground without degradation in reliability. These drivers are compatible with RS-232 logic levels and all previous RS-232 versions. Unused driver inputs should be connected to GND or VCC.

8.3.3 Receivers

The receivers convert EIA/TIA-232 levels to TTL or CMOS logic output levels. Receivers have an inverting output that can be disabled by using the FORCEOFF pin. Receivers remain active when the Auto Powerdown Plus circuitry autonomously enters a low power state. See [Auto Powerdown Plus](#) for more information on the Auto Powerdown mode. If the FORCEOFF pin is manually set low, the receivers will be disabled and put into 3-state mode. In either of these powerdown modes, the device will typically consume about 0.5 μ A. The truth table logic of the TRS3122E driver and receiver outputs can be found in [Device Functional Modes](#). Since receiver input is usually from a transmission line where long cable lengths and system interference can degrade the signal, the inputs have a typical hysteresis margin of 300 mV. This ensures that the receiver is virtually immune to noisy transmission lines. Should an input be left unconnected, an internal 5k Ω pull-down resistor to ground will commit the output of the receiver to a HIGH state.

8.3.4 ESD Protection

ESD protection structures are incorporated on all pins to protect against electrostatic discharges encountered during handling and assembly. The bus pins (driver outputs and receiver inputs) have extra protection structures, which have been tested up to ± 15 kV.

ESD protection is tested in various ways. TI uses the following standards to qualify the ESD structures designed into TRS3122E:

- ± 8 kV using IEC 61000-4-2 Contact Discharge (on RINx and DOUTx pins)
- ± 15 kV using IEC 61000-4-2 Airgap Discharge (on RINx and DOUTx pins)
- ± 15 kV using the Human Body Model (HBM) (on RINx and DOUTx pins)
- ± 2 kV using the Human Body Model (HBM) (on all pins except RINx and DOUTx pins)
- ± 0.5 kV using the Charged Device Model (CDM) (on all pins)

Feature Description (continued)

The IEC 61000-4-2 standard is more rigorous than HBM, resulting in lower voltage levels compared with HBM for the same level of ESD protection. Because IEC 61000-4-2 specifies a lower series resistance, the peak current is higher than HBM. The TRS3122E has passed both HBM and IEC 61000-4-2 testing.

8.3.5 Auto Powerdown Plus

Powerdown is engaged in two separate cases: automatically, when no activity has occurred for a period of time, and manually, using the $\overline{\text{FORCEOFF}}$ device pin.

8.3.5.1 Automatic Powerdown

Auto Powerdown Plus is enabled when FORCEON is set LOW and $\overline{\text{FORCEOFF}}$ is set HIGH. Using TRS3122E's integrated edge detection circuitry and timer, the device can sense when there is no activity on the driver or receiver inputs for 30 seconds. When this condition is sensed by the device, it automatically shuts the charge pump off, reducing supply current to 0.5 μA . When a valid transition is sensed on one of the driver or receiver inputs, the charge pump turns back on and TRS3122E exits powerdown. The typical time to exit powerdown is typically in 30 μs , but can be as long as 150 μs . As a result, the system saves power without requiring any software control. [Device Functional Modes](#) summarizes the operating modes in truth table form.

While in the low power mode with Automatic Powerdown enabled ($\overline{\text{FORCEOFF}}$ = HIGH and FORCEON = LOW), the receiver inputs are still enabled.

8.3.5.2 Manual Powerdown

The device can be manually powered down by externally setting $\overline{\text{FORCEOFF}}$ pin to low logic level. Both the drivers and receivers will be powered off. [Device Functional Modes](#) summarizes the operating modes in truth table form.

8.3.5.3 Forced On

If the $\overline{\text{FORCEOFF}}$ and FORCEON pins are both set HIGH, the device will power on with Auto Powerdown Plus disabled. Both the drivers and receiver will be active regardless of inactivity. Because powerdown is autonomous, FORCEON can be used ensure drivers are ready for new data transmission if the time since last transmission (or receive data) was more than 15 seconds. [Device Functional Modes](#) summarizes the operating modes in truth table form.

8.4 Device Functional Modes

8.4.1 Each Driver⁽¹⁾

INPUTS				OUTPUT	DRIVER STATUS
DIN	FORCEON	$\overline{\text{FORCEOFF}}$	TIME ELAPSED SINCE LAST RIN OR DIN TRANSITION	DOUT	
X	X	L	X	Z	Powered off
L	H	H	X	H	Normal operation with auto-powerdown plus disabled
H	H	H	X	L	
L	L	H	<30 s	H	Normal operation with auto-powerdown plus enabled
H	L	H	<30 s	L	
L	L	H	>30 s	Z	Powered off by auto-powerdown plus feature
H	L	H	>30 s	Z	

(1) H = high level, L = low level, X = irrelevant, Z = high impedance (off), 30s is typical inactivity time

8.4.2 Each Receiver⁽¹⁾

INPUTS			OUTPUTS	RECEIVER STATUS
RIN	$\overline{\text{FORCEOFF}}$	TIME ELAPSED SINCE LAST RIN OR DIN TRANSITION	ROUT	
X	L	X	Z	Powered off
L	H	X	H	Normal operation with auto-powerdown plus disabled/enabled
H	H	X	L	
Open	H	X	H	

(1) H = high level, L = low level, X = irrelevant, Z = high impedance (off), Open = input disconnected or connected driver off

8.4.3 $\overline{\text{INVALID}}$ Status Truth Table⁽¹⁾

INPUTS				OUTPUT
RIN1, RIN2	FORCEON	$\overline{\text{FORCEOFF}}$	TIME ELAPSED SINCE LAST RIN OR DIN TRANSITION	$\overline{\text{INVALID}}$
Any L or H	X	X	X	H
All Open	X	X	X	L

(1) H = high level, L = low level, X = irrelevant, Z = high impedance (off), Open = input disconnected or connected driver off

8.4.4 Capacitor Selection Table

Table 1. Capacitor Selection

$V_{CC} = V_L$	C1 Capacitor Value	C2 Capacitor Value	C3 Capacitor Value	C4 Capacitor Value	C5 Capacitor Value
1.65 V to 2 V ⁽¹⁾	100 nF				
3.0 V to 3.6 V ⁽¹⁾	100 nF		100 nF or open	100 nF	
4.5 V to 5.5 V ⁽¹⁾	47 nF	330 nF	100 nF or open	330 nF	
3 V to 5.5 V ⁽²⁾	47 nF	470 nF	100 nF or open	470 nF	

(1) For optimized performance, we recommend using these configurations.

(2) For applications where the Vcc variation is larger, this configuration is acceptable.

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

RS232 is used to communicate between two electrical units on separate PCBs across cables <40 ft. Common RS232 cables are RJ45, DB9 & DB25.

9.2 Typical 1.8-V Application

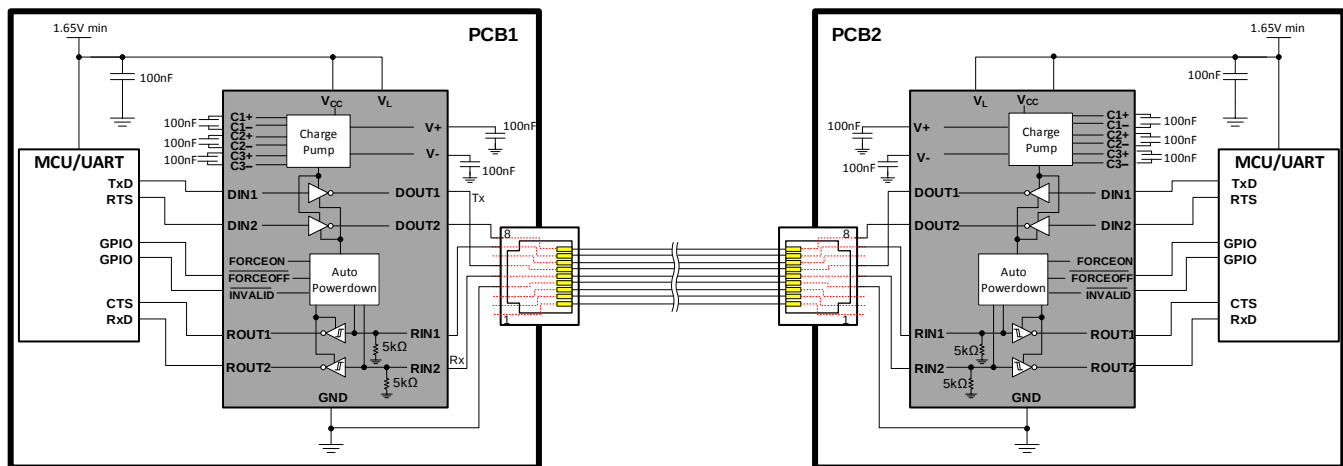


Figure 13. TRS3122E Typical Application

9.2.1 Design Requirements

For this design example, use the parameters listed in [Table 2](#) as the input parameters.

Table 2. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
MCU GPIO Supply Voltage	1.8 V
Transmission Voltage	+/-4.7 V
Data-rate	1 Mbps
Number of Transmitters / Receivers	2
Charge Pump Capacitor Values	100nF (see Table 3)

9.2.2 Detailed Design Procedure

When using TRS3122E, determine the following:

- All DIN, FORCEOFF, and FORCEON inputs must be connected to valid low or high logic levels.
- Select capacitor values based on V_{CC} level for best performance. (see [Table 3](#))

9.2.2.1 Data-Rate and Cable Length

RS-232 intended is for short range data transmission. The rise time for RS-232 driver edges is slow enough that the data cable appears as a capacitor instead of a transmission line impedance. The elapsed time for one bit of data far exceeds the transit time of any practical RS-232 cable length. The capacitance of the cable is the limiting factor. Therefore the capacitance per foot (or meter) of the cable is important if long data cables are used. Capacitance slows the rise and fall time of the signal. For low data rates, the delay is insignificant. However, high data rates will have reduced percentage of time that the output is at V_{OL} or V_{OH} and more time in the transitions. The timing of the UART (universal asynchronous receiver/transmitter) must sample the signal at the right time to coincide with V_{OL} and V_{OH} plateaus. At some point data reliability will be impacted. There are no hard limits for cable capacitance and data rate.

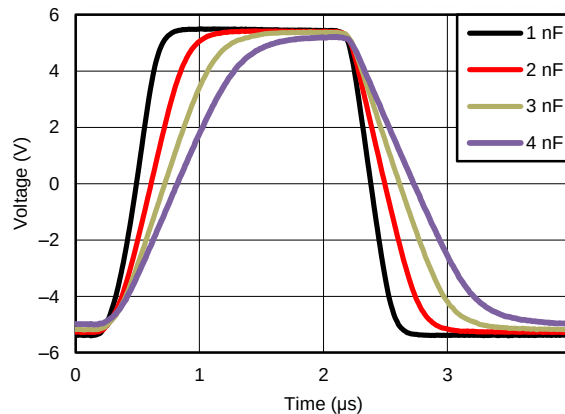


Figure 14. Typical Waveform with Capacitive Load
 $V_{CC} = 3.3\text{ V}$, $R_{LOAD} = 3\text{ k}\Omega$, Data Rate = 500kbps

The maximum cable length depends on the cable used (pf/ft), data rate, timing of receiving UART, system tolerance to data errors.

9.2.2.2 Capacitor Selection

The capacitor type used for C1–C5 is not critical for proper operation; polarized or non-polarized capacitors can be used, though lower ESR capacitors are preferred. The charge pump requires 0.1 μF capacitors for $V_{CC} = 1.8\text{ V}$ or $V_{CC} = 3.3\text{ V}$ operation. For other supply voltages, see Table 1 for required capacitor values. Do not use values smaller than those listed in Table 1. Increasing the capacitor values(e.g., by a factor of 2), except for C1, reduces ripple on the transmitter outputs and slightly reduces power consumption. C2, C3, C4 and C5 can be increased without changing C1's value. However, do not increase C1 without also increasing the values of C2, C3, C4, C5, $C_{BYPASS1}$, and $C_{BYPASS2}$ to maintain the proper ratios (C1 to the other capacitors). When using the minimum required capacitor values, make sure the capacitor value does not degrade excessively with temperature. If in doubt, use capacitors with a larger nominal value. The capacitor's equivalent series resistance (ESR) usually increases at low temperatures.

For best charge pump efficiency locate the charge pump and bypass capacitors as close as possible to the IC. Surface mount capacitors are best for this purpose. Using capacitors with lower equivalent series resistance (ESR) and self-inductance, along with minimizing parasitic PCB trace inductance will optimize charge pump operation. Designers are also advised to consider that capacitor values may shift over time and operating temperature.

Table 3. Capacitor Selection

$V_{CC} = V_L$	C1 Capacitor Value	C2 Capacitor Value	C3 Capacitor Value	C4 Capacitor Value	C5 Capacitor Value
1.65 V to 2 V ⁽¹⁾	100 nF				
3.0 V to 3.6 V ⁽¹⁾	100 nF		100 nF or open	100 nF	
4.5 V to 5.5 V ⁽¹⁾	47 nF	330 nF	100 nF or open	330 nF	
3 V to 5.5 V ⁽²⁾	47 nF	470 nF	100 nF or open	470 nF	

(1) For optimized performance, we recommend using these configurations.

(2) For applications where the V_{CC} variation is larger, this configuration is acceptable.

9.2.3 Application Curves

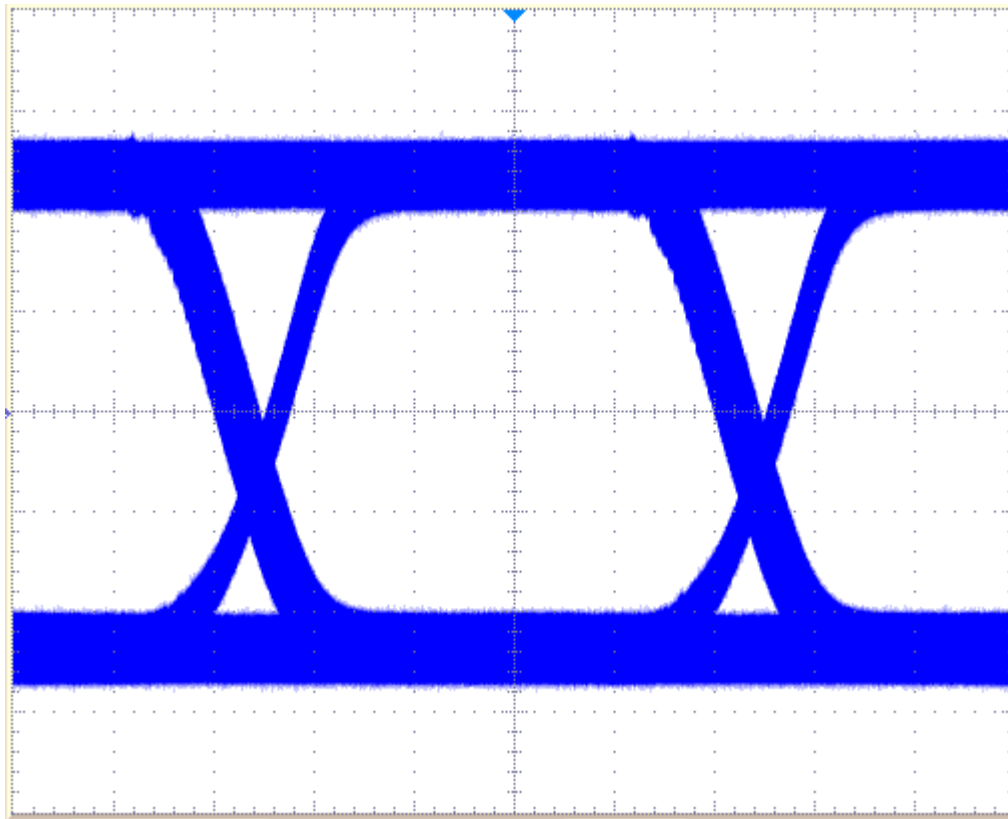


Figure 15. 1 Mbps Eye Diagram, 2 V/div, 200 ns/ div
 $V_{CC} = 1.8\text{ V}$, $C_{LOAD} = 500\text{ pF}$, $R_{LOAD} = 3\text{ k}\Omega$

10 Power Supply Recommendations

In most circumstances, a $0.1\text{-}\mu\text{F}$ V_{CC} bypass capacitor and a $1\text{-}\mu\text{F}$ V_L bypass capacitor are adequate. In applications that are sensitive to power-supply noise, use larger value V_{CC} bypass capacitor. There is no maximum limit for bypass capacitor. Place bypass capacitors as close to the IC as possible.

It is not recommended to use this device when V_{CC} is powered and $V_L = 0\text{ V}$ or floating for an extended period of time because operation is undefined. V_{CC} and V_L must be powered to guarantee charge pump operation.

Also, to achieve full functionality as described in [Specifications](#), it is recommended to not use a higher voltage on V_L than V_{CC} . Full functionality can be achieved when V_{CC} is greater than or equal to V_L .

11 Layout

11.1 Layout Guidelines

Minimize the length of all capacitor traces to ensure the device can maintain quick rising and falling transitions. Vias are recommended to accommodate layouts for the capacitors.

11.2 Layout Example

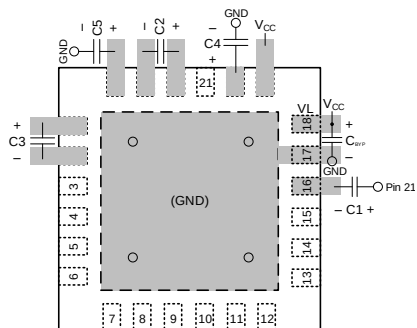


Figure 16. TRS3122E Typical Layout

12 Device and Documentation Support

12.1 Device Support

12.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.3 Trademarks

E2E is a trademark of Texas Instruments.

12.4 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TRS3122ERGER	ACTIVE	VQFN	RGE	24	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TRS3122	Samples
TRS3122ERGET	ACTIVE	VQFN	RGE	24	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	TRS3122	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.


(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

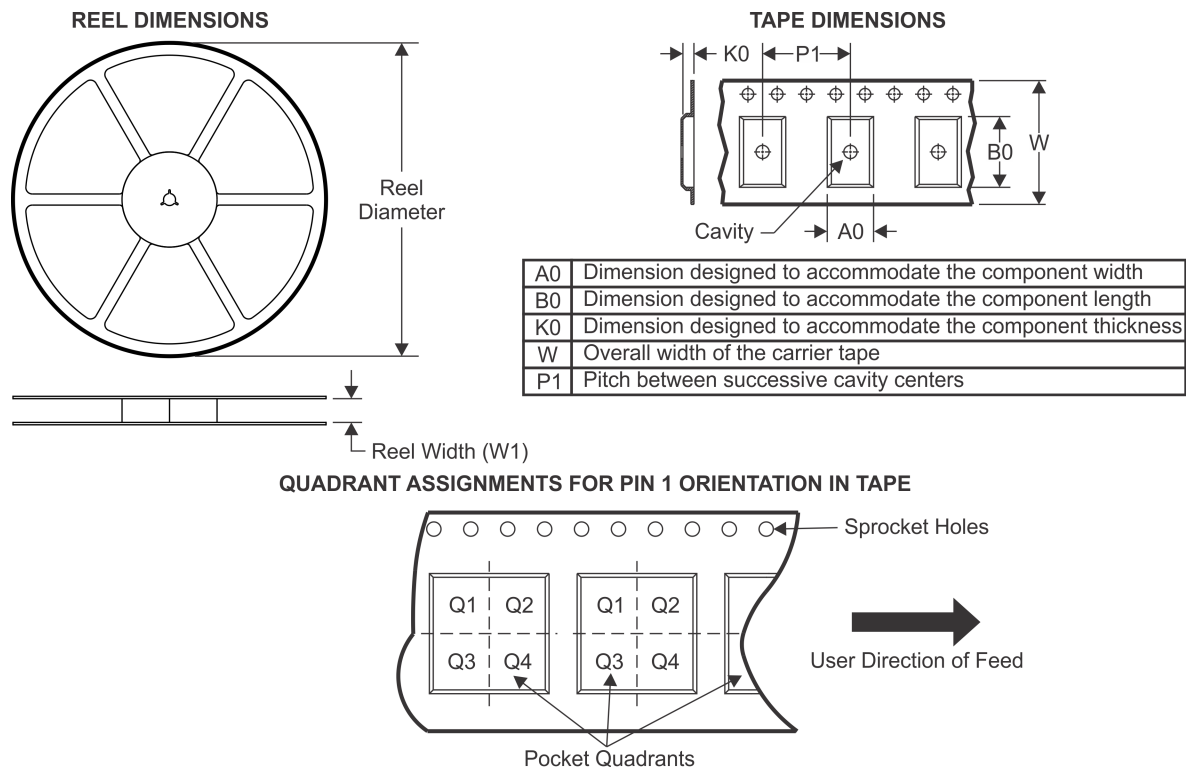TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TRS3122ERGER	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
TRS3122ERGET	VQFN	RGE	24	250	180.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

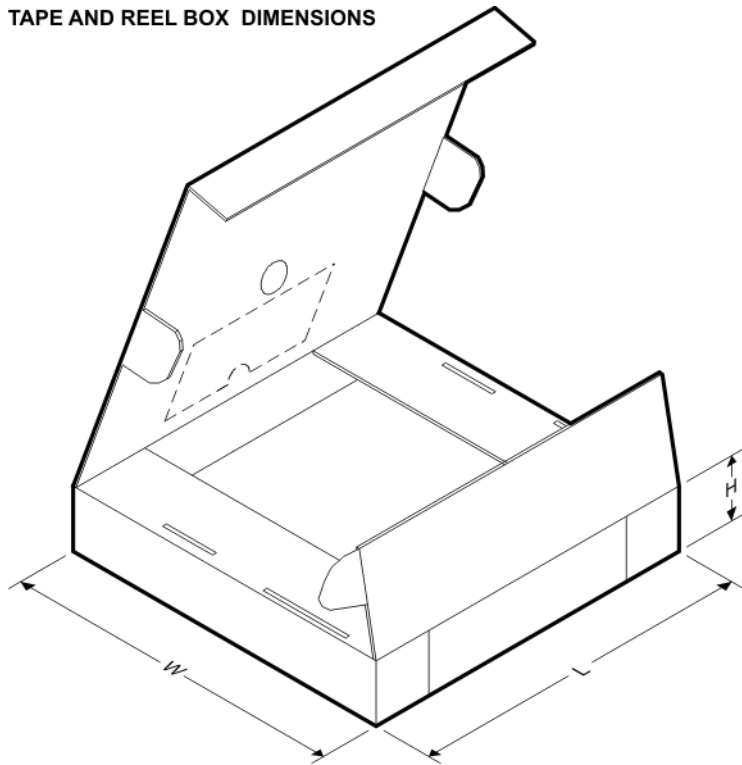

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TRS3122ERGER	VQFN	RGE	24	3000	367.0	367.0	35.0
TRS3122ERGET	VQFN	RGE	24	250	210.0	185.0	35.0

RGE 24

GENERIC PACKAGE VIEW


VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

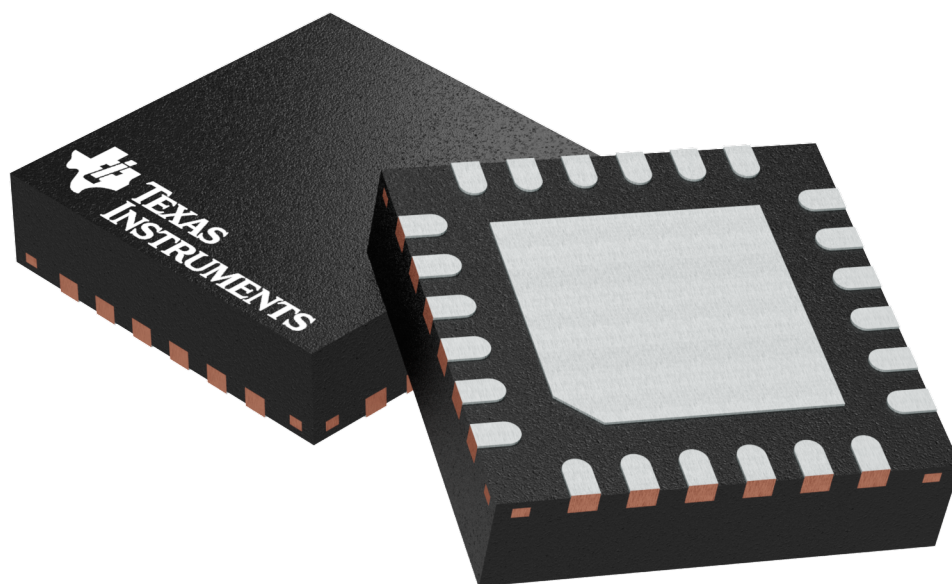


Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4204104/H

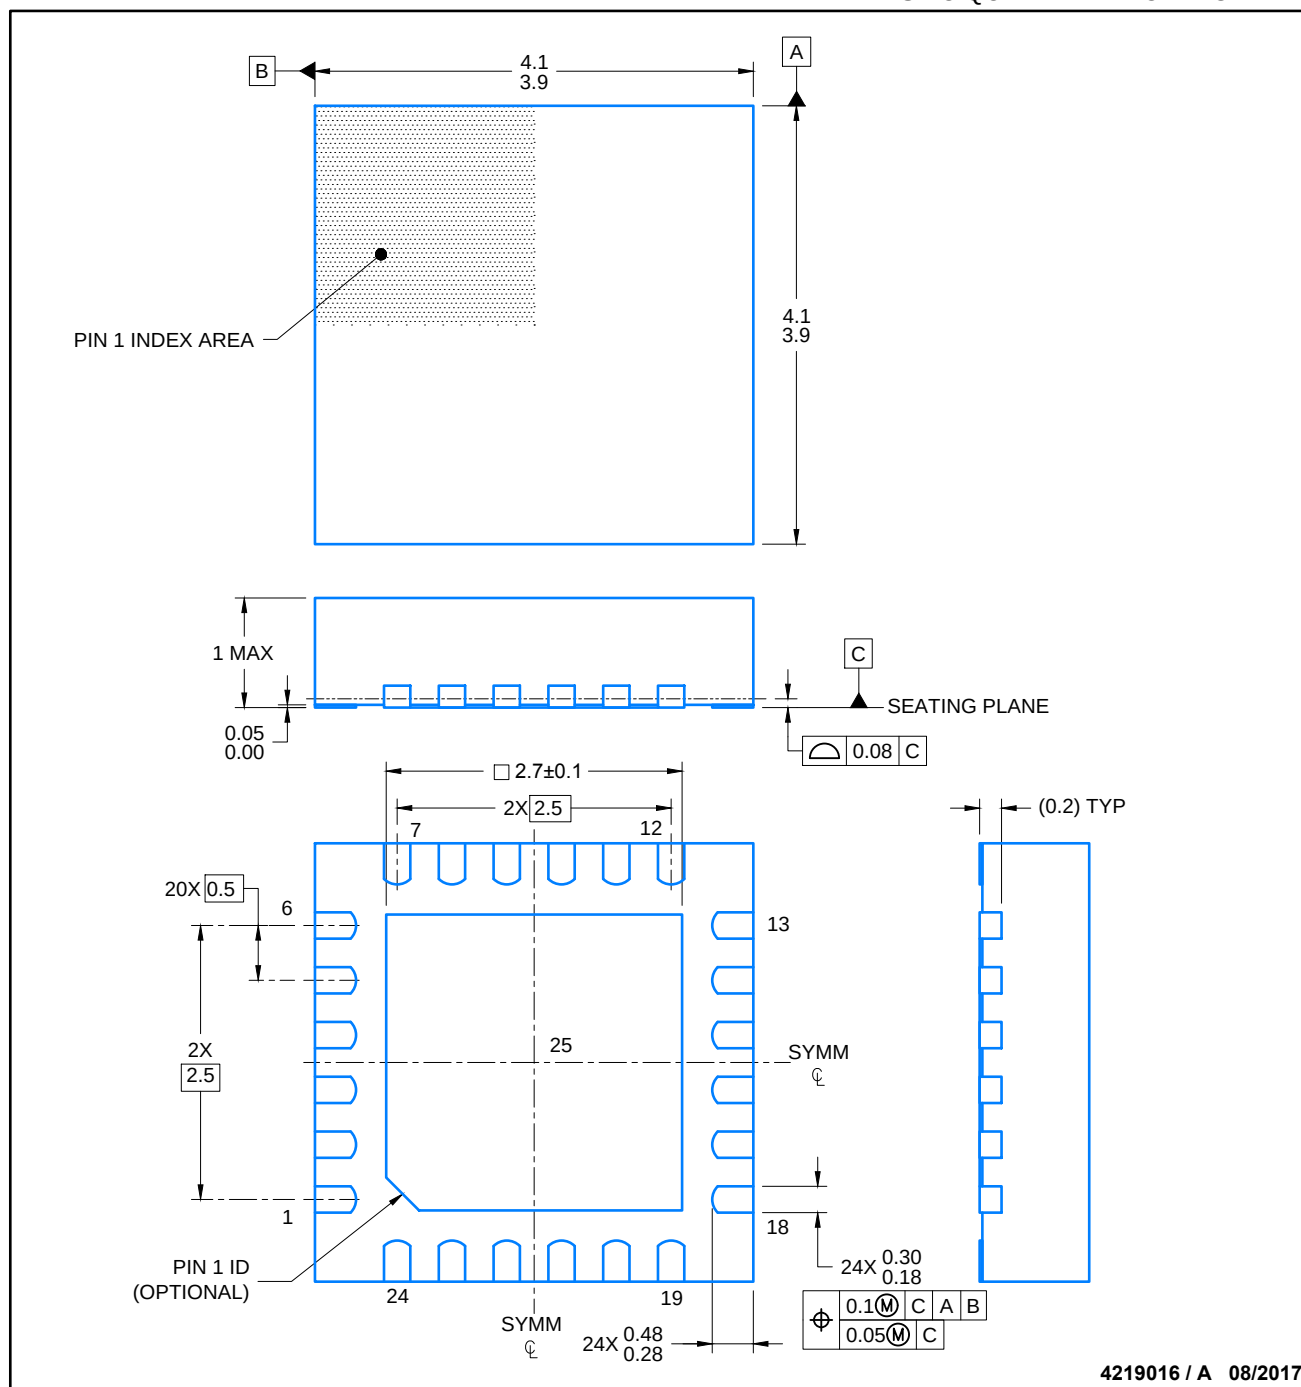

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

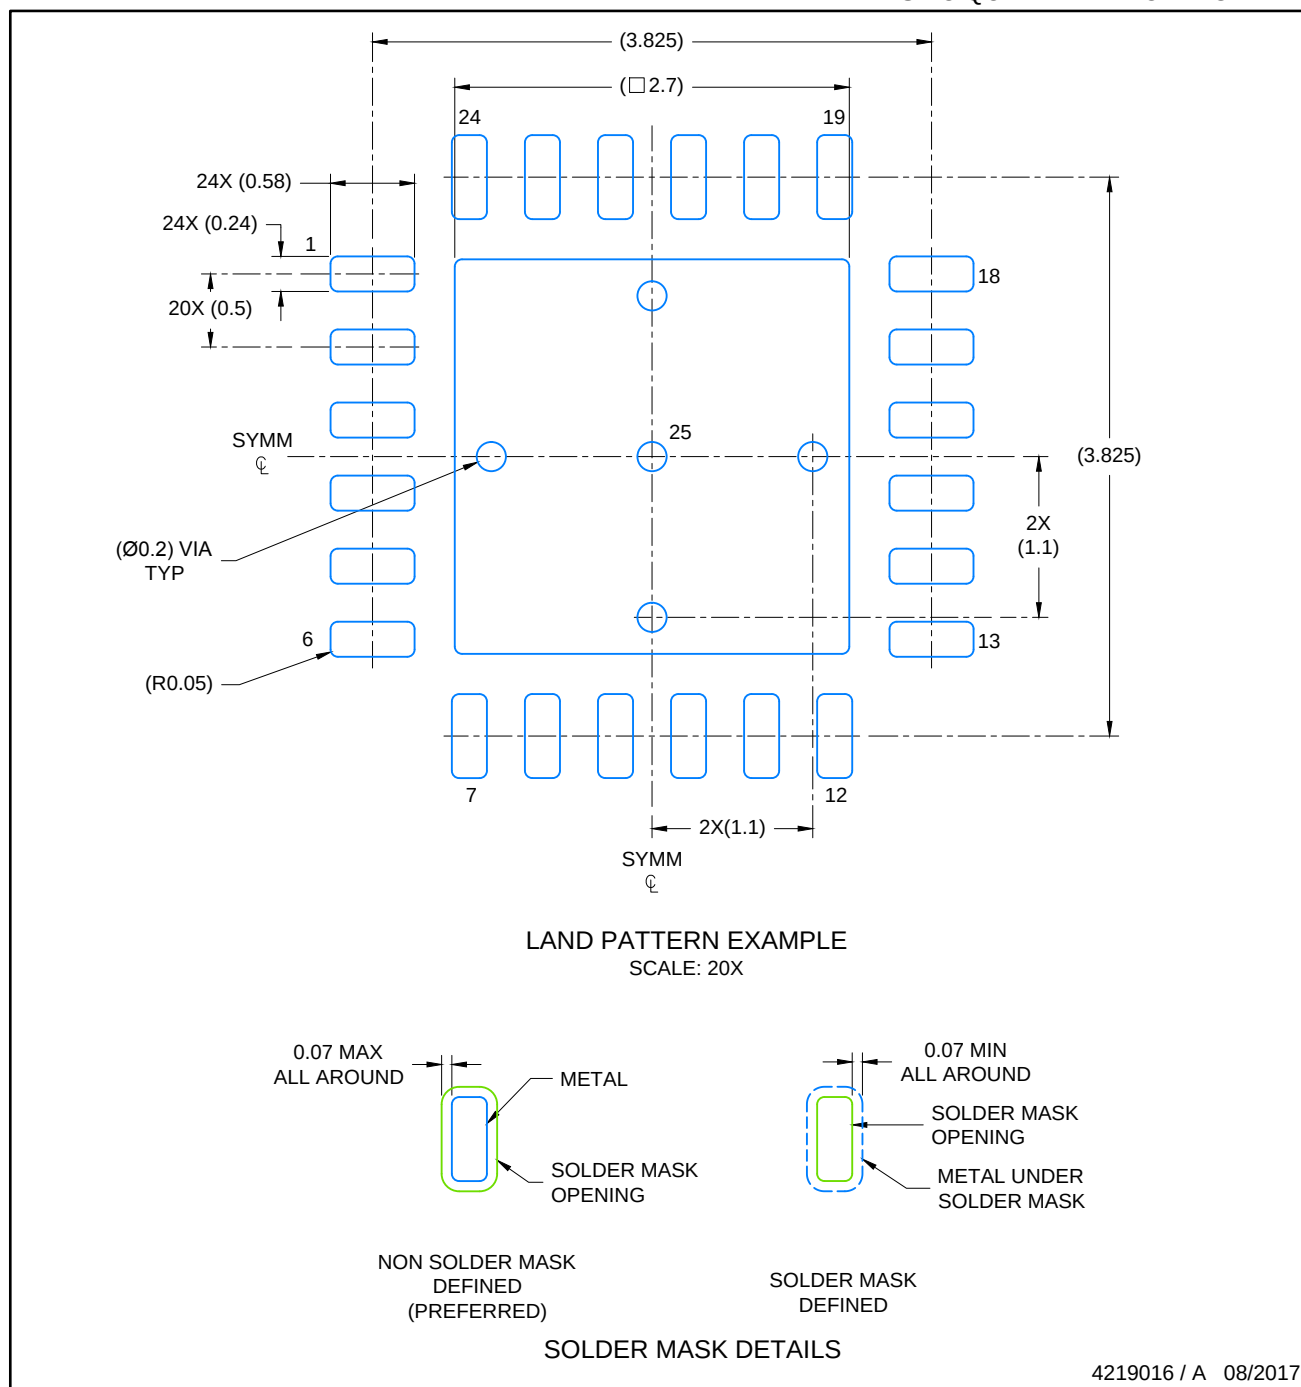

4219016 / A 08/2017

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

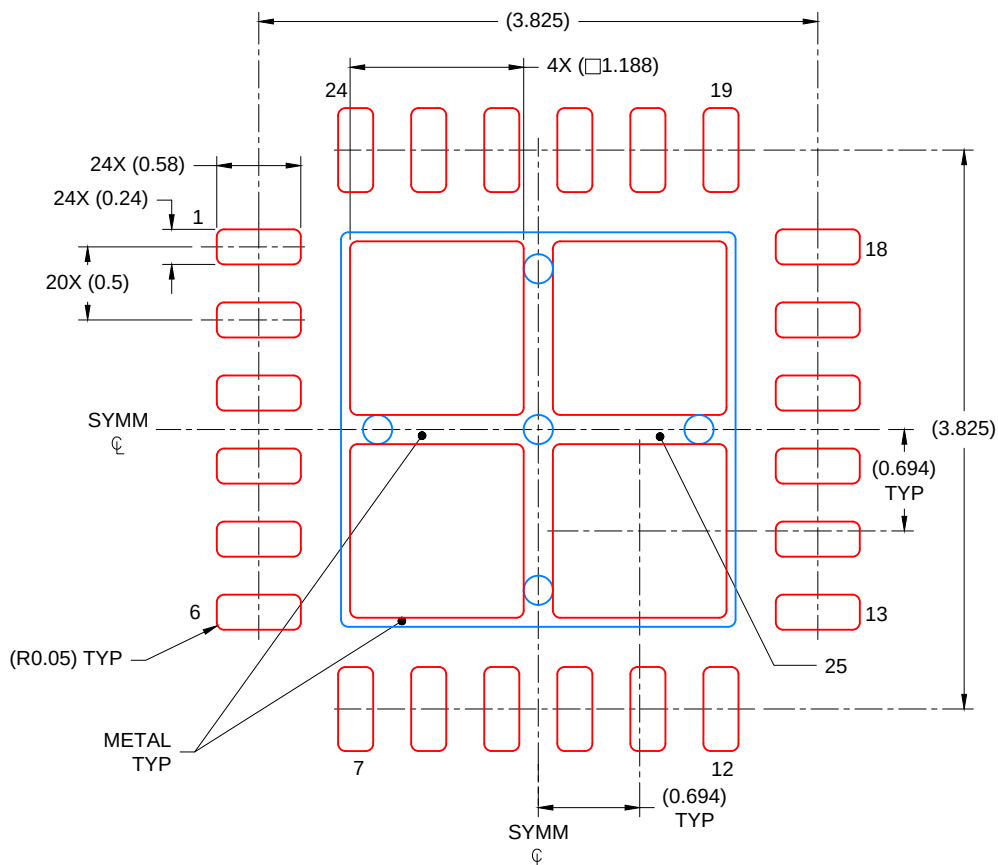

SOLDER PASTE EXAMPLE
 BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD
 78% PRINTED COVERAGE BY AREA
 SCALE: 20X

4219016 / A 08/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations..

IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.