



**M-55A**  
**Dynamic Moving Coil**  
**Microphone Omnidirectional, for**  
**Amateur Purposes**


Designed for use with any type of tape recorder, this elegantly styled microphone has excellent high-fidelity reproduction. Chrome plated metal case, shock resistant, and with the help of a plastic tripod, can be set up anywhere and be tilted in any direction. The M-55A has a transformer inside the microphone housing and is a high and low impedance microphone, depending upon how connected.

*PRICE: \$ 25.00*

## Specifications:

Frequency response: 70 — 16000 cps  
Output level at 1 kc: low impedance, 0.12 mv/ubar = -56 dbm (0 db = 1 mw per 10 ubar) high impedance, 2.0 mv/ubar = -54 db (0 db = 1 v/ubar)  
Polar pattern: Omnidirectional  
Output impedance: 200 ohms and 80K ohms  
Connections: Ten feet cables with standard USA microphone jack.  
Dimensions: 1.2" x 1.2" x 4.5"

Nominal frequency response

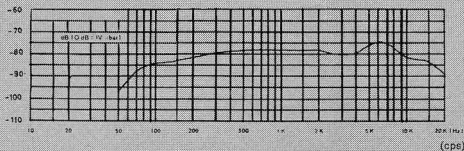

(cpe)