



Midrange ARZ 3608

A direct-radiator electrodynamic loudspeaker for middle range sounding in three-way loudspeaker systems.

ACOUSTICAL DATA

Rated noise power ¹⁾	15	W
Short term maximum power ²⁾	40	W
Rated impedance	8	Ohm
Resonance frequency F_s	-	Hz
Rated frequency range	1300 - 10000	Hz
Sensitivity ³⁾	86	dB

MECHANICAL DATA


Voice coil carrier material	paper	
Voice coil diameter	18.4	mm
Winding height of voice coil	5	mm
Yoke diameter	18	mm
Air gap height	3.5	mm
Magnet external diameter	55	mm
Magnet internal diameter	24	mm
Magnet height	14	mm
Compensating magnet external diameter	-	mm
Compensating magnet internal diameter	-	mm
Compensating magnet height	-	mm
Weight	0.35	kg

1) DIN IEC 268-5, without baffle dm3

2) CSN IEC 268-5, without baffle dm3

3) CSN IEC 268-5, standard baffle, 1W, 1 m, 1300 - 10000 Hz

Frequency response

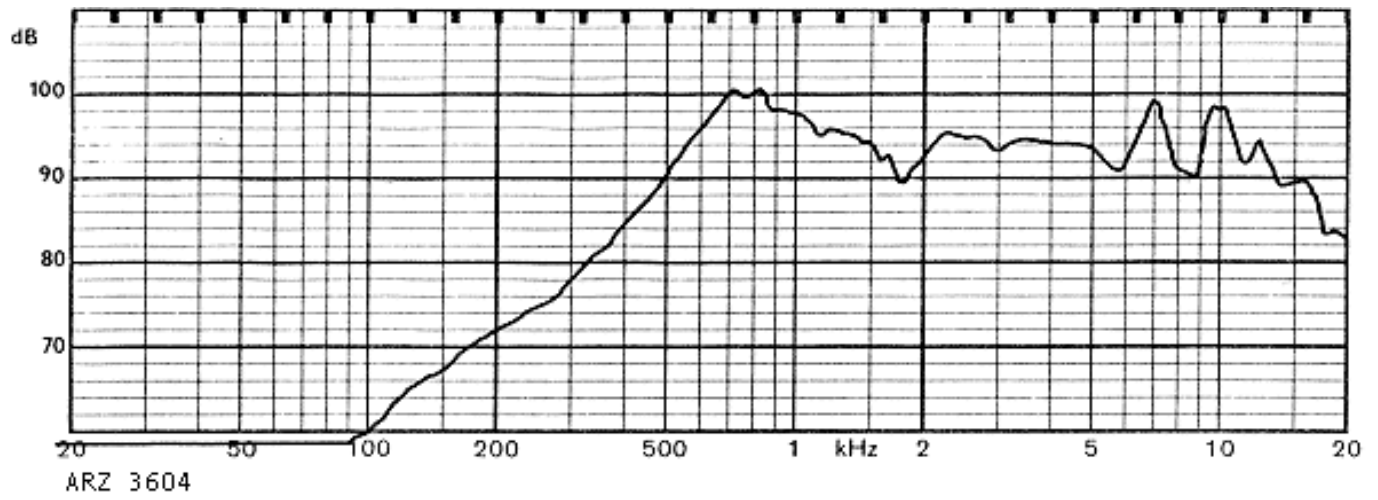

Drawing

