


BL10-200X

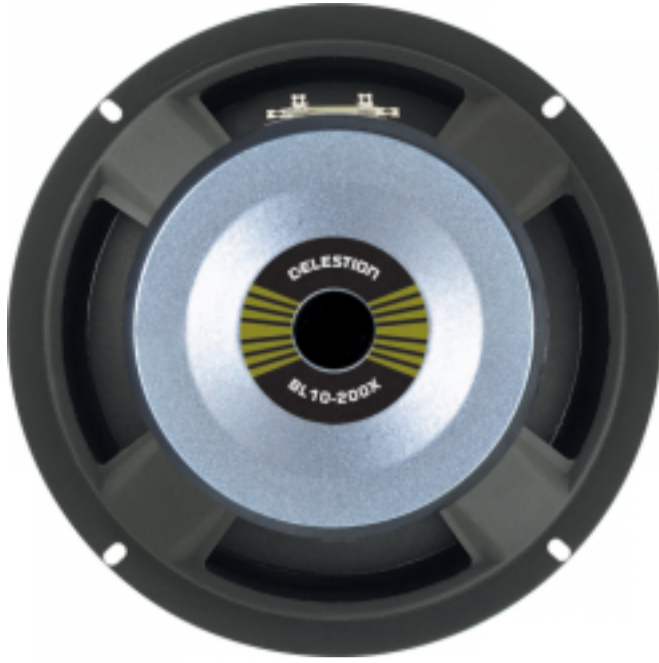


Not every player wants a super-clean, high-fidelity bass sound.

Characterised by an extended low end and greater linear excursion, Green Label speakers push out every note with a rich, warm tone and a powerful low-end thump.

Available with Ferrite or Neodymium magnets, Green Label speakers are primed for high-powered rock performances, where a full-bodied, warm, defined tone is essential.

8 Ω Frequency Response

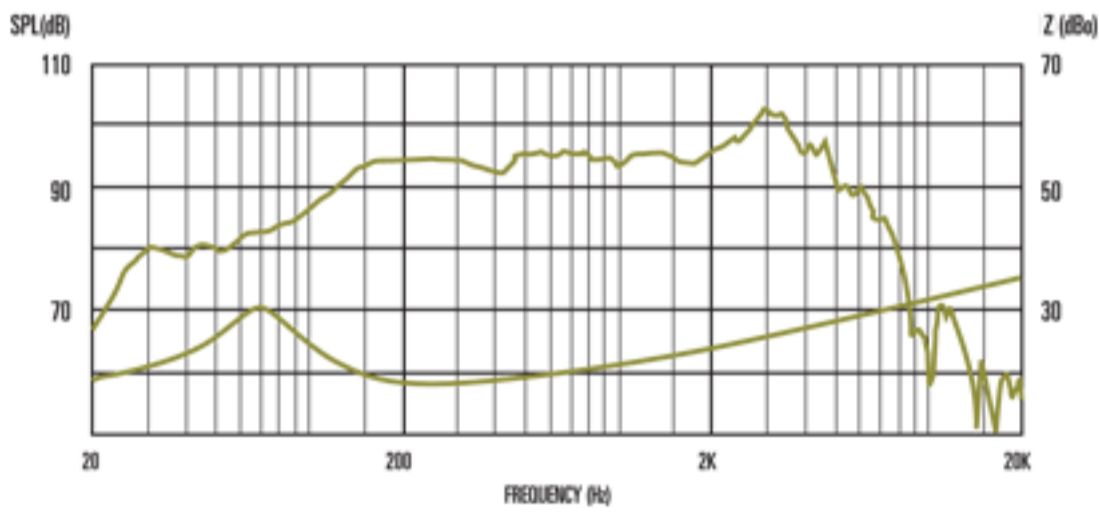

General Specifications

Nominal diameter	254mm/10in
Power rating	200Wrms
Nominal impedance	8 Ω
Sensitivity	94dB
Magnet type	Ferrite
Voice coil diameter	50.8mm/2in
Coil material	Copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Surround material	Cloth-sealed
Frequency range	45-3500Hz
Xmax	4mm/0.15in
Gap depth	8mm/0.31in
Voice coil winding width	16mm/0.62in

Small Signal Parameters

D	0.21m/8.27in
Fs	73Hz
Mair	3.64g/0.128oz
Mmd	31.95g/1.123oz
Qms	3.58
Qes	0.56
Qts	0.48
Re	5.8 Ω
Vas	22.74lt/0.80ft ³
Bl	13.02Tm
Cms	0.13mm/N
Rms	4.55kg/s
Le (at 1kHz)	0.92mH

Mounting Information

Cut-out diameter	229mm/9in
Diameter	256mm/10.1in
Mounting slot dimensions	6 x 8mm/0.24 x 0.31in
Mounting slot PCD	245mm/9.6in
Number of mounting slots	4
Overall depth	110mm/4.3in
Unit weight	3kg/6.6lb