

Specification

Nominal Basket Diameter	10", 254mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	125W
Music Program	
Resonance	50Hz
Usable Frequency Range***	84Hz-5kHz
Sensitivity	95.3
Magnet Weight	20oz
Gap Height	.24", 5.99mm
Voice Coil Diameter	1.5", 38.1mm

Thiele & Small Parameters

Resonant Frequency (fs)	50Hz
DC Resistance (Re)	6.6
Coil Inductance (Le)	.66mH
Mechanical Q (Qms)	3.81
Electromagnetic Q (Qes)	0.58
Total Q (Qts)	0.5
Compliance Equivalent Volume (Vas)	80.23 ltr./2.83cuft
Peak Diaphragm Displacement Volume (Vd)	113.00cc
Mechanical Compliance of Suspension (Cms)	.46mm/N
BL Product (BL)	9.0 T-M
Diaphragm Mass inc. Airload (Mms)	22.6 grams
Efficiency Bandwidth Product (EBP)	86
Maximum Linear Excursion (Xmax)	3.2mm
Surface Area of Cone (Sd)	355.4cm ²
Maximum Mechanical Limit (Xlim)	9.0mm

Mounting Information

Recommended Enclosure Volume	
Sealed	8-35 liters / .3-1.3 cuft
Vented	37-61 liters / 1.3-2.2 cuft
Overall Diameter	10.11", 256.79mm
Baffle Hole Diameter	9.13", 231.90mm
Front Sealing Gasket	fitted as standard
Rear Sealing Gasket	fitted as standard
Mounting Holes Diameter	.23", 5.72mm
Mounting Holes B.C.D.	9.69", 246.13mm
Depth	3.80", 96.52mm
Net Weight	4.20 lbs, 1.91 kg
Shipping Weight	

Materials of Construction

Coil Construction	Copper
Coil Former	Polymide
Magnet Composition	Ferrite
Motor Details	Vented Core Bumped BackPlate
Basket Material	Steel
Cone Composition	Treated Paper
Cone Edge Composition	Sealed Cloth
Dust Cap Composition	Treated Paper






EMINENCE[®]

 DONGGUAN

EPA-S1510

Medium Power PA, MI, or Pro-Sound. Works well in small sealed boxes as a mid/bass driver. Works well in medium sized vented boxes as a woofer. Will work well for Bass Guitar in vented designs.

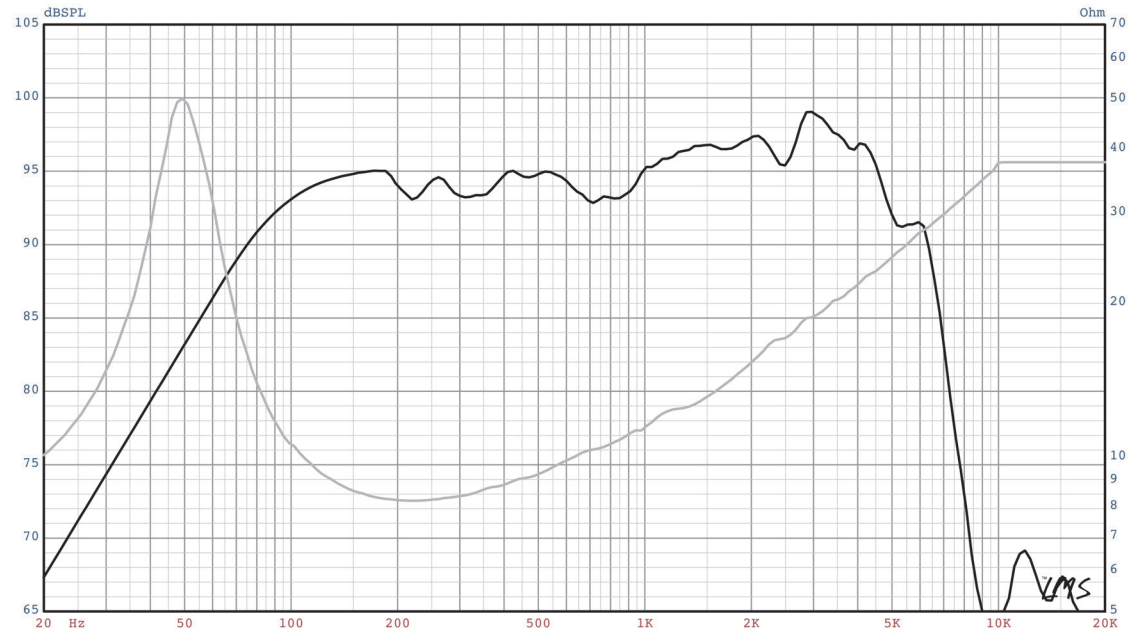

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)