

FULL RANGE LOUDSPEAKER GDS 16/30

9 5157 066



TECHNICAL DATA

Rated impedance	8 Ω
Voice coil resistance	7,3 Ω
Rated frequency range	90 to 12000 kHz
Resonance frequency	55 kHz
Power handling capacity, /Enclosure 9 dm ³ , 100 h, continuous/	30 W
Max power	60 W
Sensitivity	88 dB
Flux density	0,67 T
Energy in air gap	102 mJ
Air-gap	25/4,5/1,5 mm
Voice coil height	7,4 mm
Magnet	
- material	ferrite
- dimensions	70/32/15 mm
- mass	0,23 kg
Mass of loudspeaker	0,62 kg

The loudspeaker has a double cone
Connection is by 2,8 mm x 0,8 mm and 4,8 mm x 0,8 mm tag connectors or by soldering.

AVAILABLE VERSIONS

- GDS 16/30 - 8 Ω , catalogue number 9 5157 066 01

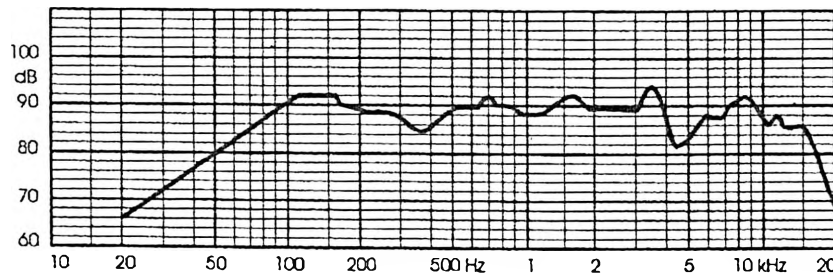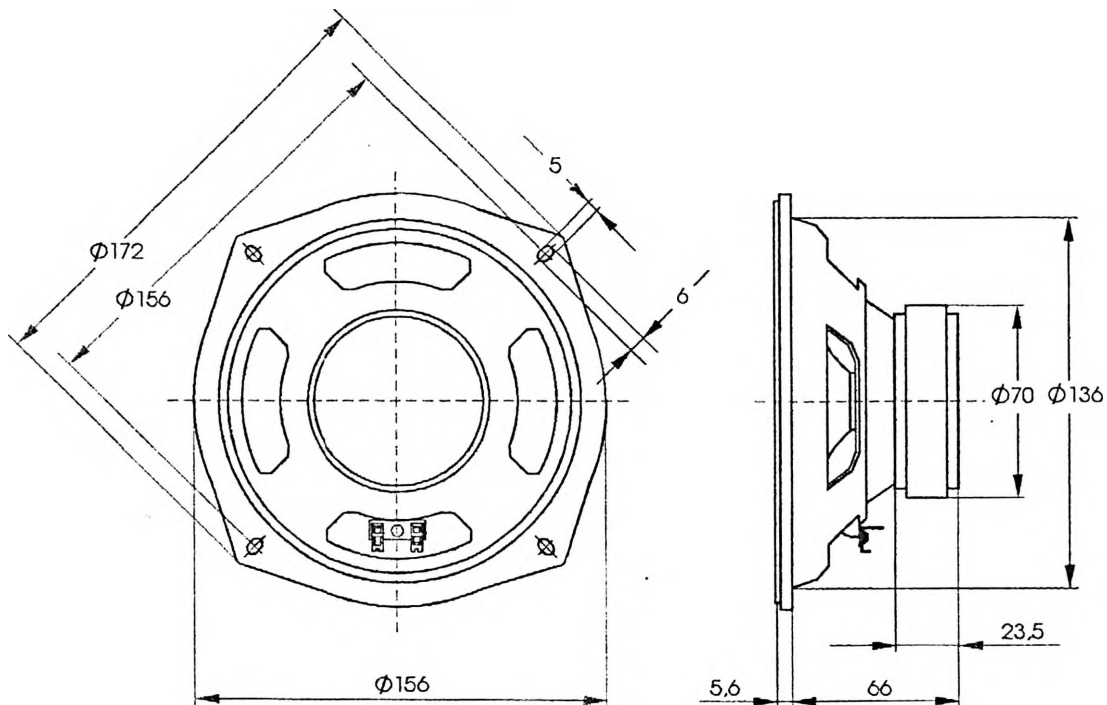

FREQUENCY RESPONSE CURVE
Measured in anechoic room at 1W, 1m, Loudspeaker mounted on IEC baffle.