

SPECIFICATION

Nominal Basket Diameter	15", 381mm
Nominal Impedance*	8 ohms
Power Rating**	
Watts	600W
Music Program	1200W
Resonance	39Hz
Usable Frequency Range***	38Hz-2.70kHz
Sensitivity	99.00
Magnet Weight	95 oz.
Gap Height	0.37", 9.53mm
Voice Coil Diameter	3", 76.20mm

THIELE & SMALL PARAMETERS

Resonant Frequency (fs)	39Hz
DC Resistance (Re)	5.40
Coil Inductance (Le)	1.27mH
Mechanical Q (Qms)	6.08
Electromagnetic Q (Qes)	0.41
Total Q (Qts)	0.38
Compliance Equivalent Volume (Vas)	159.00 liters / 5.60 cu.ft.
Peak Diaphragm Displacement Volume (Vd)	471.00cc
Mechanical Compliance of Suspension (Cms)	0.15mm/N
BL Product (BL)	18.60 T-M
Diaphragm Mass inc. Airload (Mms)	105 grams
Efficiency Bandwidth Product (EBP)	95.00
Maximum Linear Excursion (Xmax)	5.50mm
Surface Area of Cone (Sd)	856.30 cm ²
Maximum Mechanical Limit (Xlim)	10.40mm

MOUNTING INFORMATION

Recommended Enclosure Volume	
Sealed	N/A
Vented	62.00-193.00 liters/2.20-6.80 cu.ft.
Overall Diameter	15.16", 384.90mm
Baffle Hole Diameter	13.87", 352.30mm
Front Sealing Gasket	Fitted as standard
Rear Sealing Gasket	Fitted as standard
Mounting Holes Diameter	0.25", 6.40mm
Mounting Holes B.C.D.	14.56", 369.90mm
Depth	6.38", 162mm
Net Weight	20.00 lbs., 9.10 kg
Shipping Weight	22.30 lbs., 10.10 kg

MATERIALS OF CONSTRUCTION


Copper voice coil
 Polyimide former
 Ferrite magnet
 Vented core
 Pressed steel basket
 Paper Cone
 Cloth cone edge
 Solid composition paper dust cap



EMINENCE®
 The Art and Science of Sound

KAPPA-15LFA AMERICAN STANDARD SERIES

Recommended for professional audio in a vented mid-bass or bass enclosure. Also suitable for bass guitar.

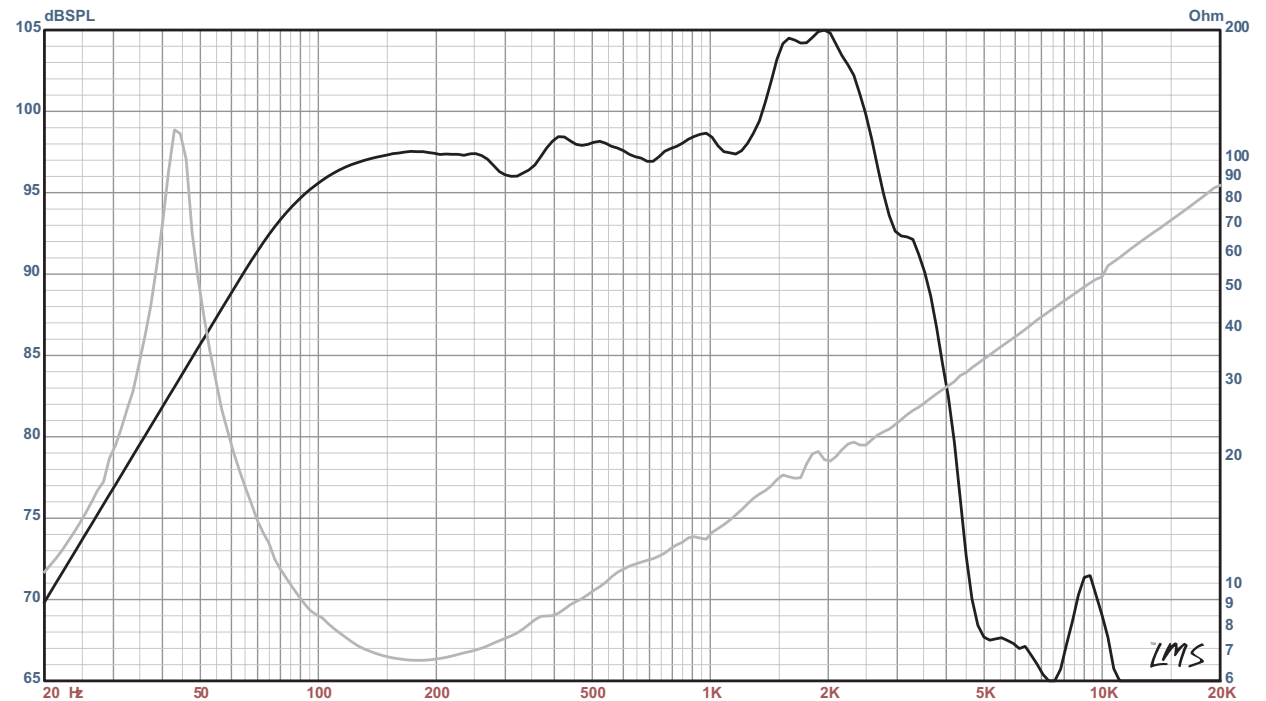

* Please inquire about alternative impedances.

** Multiple units exceed published rating evaluated under EIA 426A noise source and test standard while in a free-air, non-temperature controlled environment.

*** The average output across the usable frequency range when applying 1W/1M into the nominal impedance. ie: 2.83V/8ohms, 4V/16ohms.

Eminence response curves are measured under the following conditions: All speakers are tested at 1w/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft. X 2ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Hafler P1500 Trans-Nova amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges)