

## FDM™ TECHNOLOGY

# MAVERICK™

Don't sacrifice tone for lower stage volume! The Eminence Maverick™ guitar speaker with patent-pending FDM™ technology puts tonal control at your fingertips. Simply adjust the knob on the back of the speaker to attenuate volume while creating an overdriven, saturated tube tone. Perfect for small venues, studios and practice situations. Very balanced, versatile American tone with fat lows, warm mids, and articulate highs.



**12"** | **75 WATTS**  
**8 Ω**

### SPECIFICATION

Nominal Basket Diameter	12", 305 mm
Nominal Impedance*	8 Ω
Power Rating*	75 W
Resonance (Fs)	82 Hz
Usable Frequency Range	80 Hz – 5 kHz
Sensitivity*	91.5 – 100 dB
DC Resistance (Re)	5.99 Ω
Qts	1.09
Magnet Weight	38 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	1.75", 44 mm


### MOUNTING INFORMATION

Enclosure Type	Closed Back
Open Back	Acceptable
Driver Volume Displaced	0.078 cu.ft., 2.2 liters
Overall Diameter	12.03", 305.6 mm
Baffle Hole Diameter	11.07", 281.2 mm
Depth	6.56", 166.7 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	Yes
Mounting Holes Diameter	0.25", 6.4 mm
Mounting Holes B.C.D.	11.59", 294.4 mm
Net Weight	7.8 lbs , 3.54 kg
Shipping Weight	9.7 lbs , 4.4 kg

### MATERIALS OF CONSTRUCTION

Copper voice coil
Polymide former
Ferrite magnet
FDM Technology
Pressed steel basket
Paper cone
Paper cone edge
Zurette dust cap

### FREQUENCY RESPONSE & IMPEDANCE CURVE\*

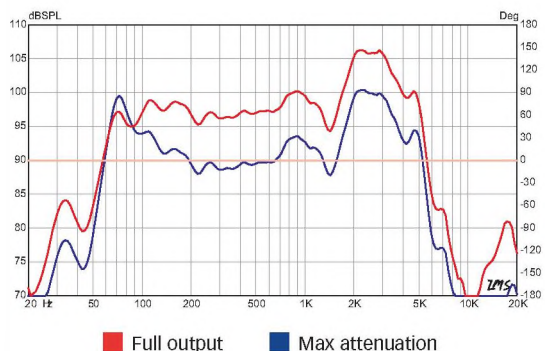

\* See footnotes on page 155 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.