

# AN7399, AN7399S

## Spatializer sound processor IC

### Overview


A spatializer audio processor is the Desper Inc.'s proprietary signal processing technology exclusively developed for the consumer electronics and multimedia market. It is based on the Desper's professional 3D audio production system "PRO-Spatializer". You can enjoy a sound enhancement and extension effect with the conventional two-speaker stereo system by using the innovative technology adopted in this equipment.

### Features


- Fewer external parts (minimum parts count: 4)
- Wide operating supply voltage: 4.5 V to 10 V
- A sound source in the center position is necessarily positioned in center regardless of the spatializer effect value.

### Applications

- Radio cassette recorder, stereo-sound TV and VCR, personal computer, active speaker

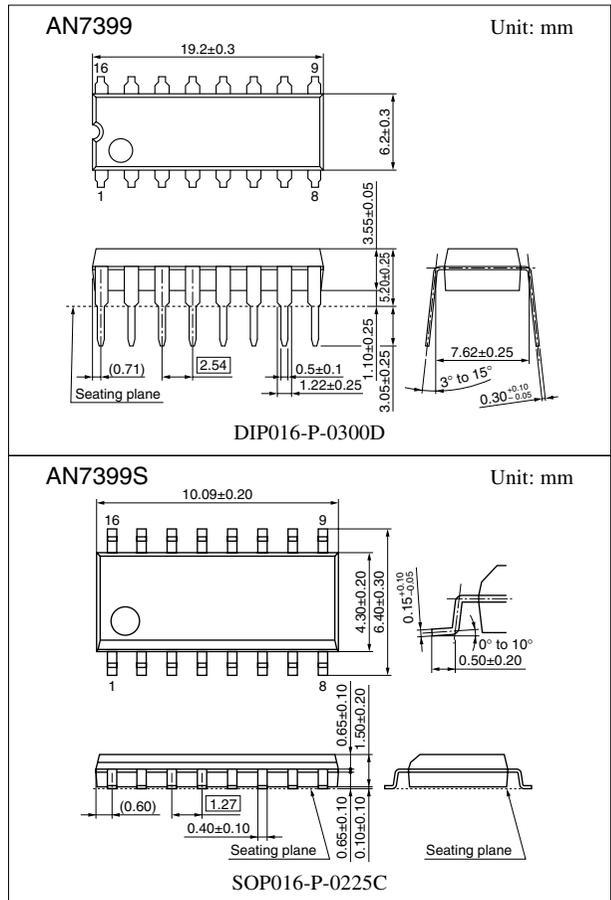

### Pin Assignment

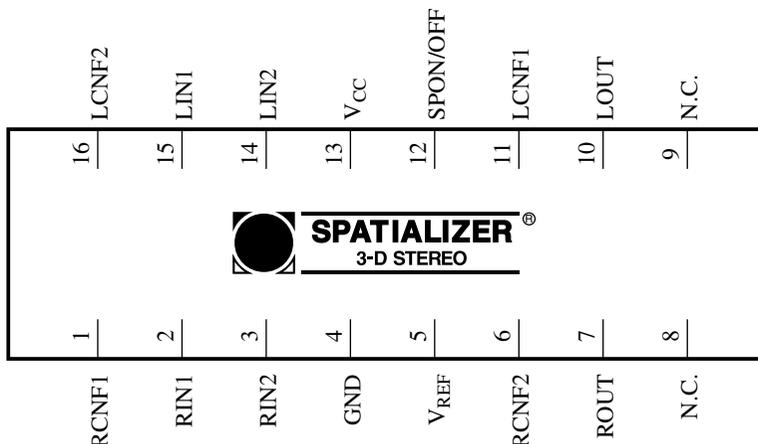

### ■ Pin Descriptions

Pin No.	Description	Pin No.	Description
1	RCNF1	9	N.C.
2	RIN1	10	LOUT
3	RIN2	11	LCNF1
4	GND	12	SPON/OFF
5	V <sub>REF</sub>	13	V <sub>CC</sub>
6	RCNF2	14	LIN2
7	ROUT	15	LIN1
8	N.C.	16	LCNF2

### ■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	10.5	V
Supply current	I <sub>CC</sub>	3.0	mA
Power dissipation	P <sub>D</sub>	31.5	mW
Operating ambient temperature *	T <sub>opr</sub>	-25 to +75	°C
Storage temperature *	T <sub>stg</sub>	-55 to +150	°C

Note) \*: Except for the operating ambient temperature and storage temperature, all ratings are for T<sub>a</sub> = 25°C.

### ■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V <sub>CC</sub>	4.5 to 10.0	V

### ■ Electrical Characteristics at V<sub>CC</sub> = 9 V, freq. = 1 kHz, T<sub>a</sub> = 25°C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Off mode gain *1	VFFG	V <sub>IN</sub> = 1 V[rms], f = 1 kHz	-1	0	1	dB
Off mode total harmonic distortion *1	THD <sub>FF</sub>	V <sub>IN</sub> = 1 V[rms], f = 1 kHz	—	0.01	0.05	%
On mode total harmonic distortion *1	THD <sub>ON</sub>	V <sub>IN</sub> = 0.4 V[rms], f = 1 kHz	—	0.02	0.1	%
Off mode output residual noise *2	N <sub>FF</sub>	V <sub>IN</sub> = 0 mV[rms], R <sub>G</sub> = 4.7 kΩ	—	5	15	μV[rms]
On mode output residual noise *2	N <sub>ON</sub>	V <sub>IN</sub> = 0 mV[rms], R <sub>G</sub> = 4.7 kΩ	—	7	20	μV[rms]
Crosstalk (off mode) *1	CT	V <sub>IN</sub> = 1 V[rms], f = 1 kHz	—	-95	-75	dB
Maximum input level (off mode) *1	V <sub>MAX</sub>	THD = 1%, f = 1 kHz	2.0	2.4	—	V[rms]
Total circuit current at no load	I <sub>TOTAL</sub>	V <sub>IN</sub> = 0 mV[rms]	0.8	1.4	2.0	mA
Off mode changeover voltage	V <sub>OFF</sub>		0.0	—	0.5	V
On mode changeover voltage	V <sub>ON</sub>		2.7	—	V <sub>CC</sub>	V

Note) \*1: Use DIN audio filter.

\*2: Use A-characteristic curve filter.


■ Terminal Equivalent Circuits

Pin No.	Symbol	Equivalent circuit	Description	Voltage
1	RCNF1	—	Capacitor pin 1	4.5 V
2	RIN1		R-ch. input pin 1	4.5 V
3	RIN2		R-ch. input pin 2	4.5 V
4	GND	—	GND pin	0 V
5	V <sub>REF</sub>		Reference voltage stabilizing pin	4.5 V
6	RCNF2	—	Capacitor pin 2	4.5 V
7	ROUT		R-ch. output pin	4.5 V
8	N.C.	—	—	—
9	N.C.	—	—	—

■ Terminal Equivalent Circuits (continued)

Pin No.	Symbol	Equivalent circuit	Description	Voltage
10	LOUT		L-ch. output pin	4.5 V
11	LCNF1	—	Capacitor pin 3	4.5 V
12	SPON/OFF		Mode changeover pin	$V_{CC}$ to 2.7 V / 0.5 V to 0 V
13	$V_{CC}$	—	Supply pin	$V_{CC}$
14	LIN1		L-ch. input pin 1	4.5 V
15	LIN2		L-ch. input pin 2	4.5 V
16	LCNF2	—	Capacitor pin 4	4.5 V

■ Application Circuit Example

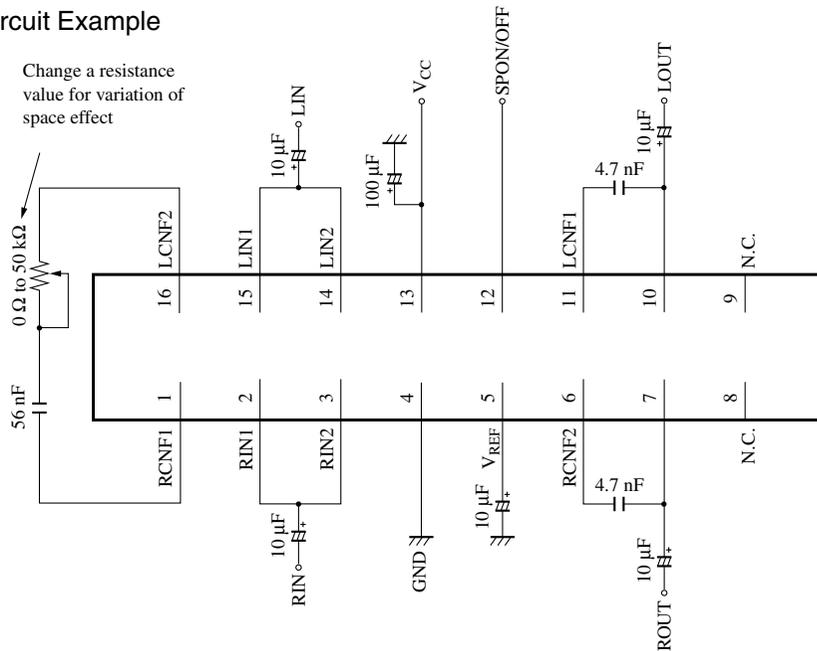

■ Conceptual Description on Spatializer Operation


• Stereo normal mode

All sound are heard from between both left and right speakers.



• Conventional surround system

Sound expands outside the speakers but the sound position is not stable.

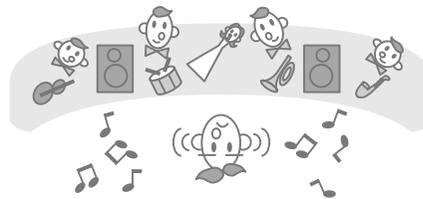

• Spatializer

The sound expands outside the two speakers and the sound position is stable.

The sound come to have its expansion and depth. And also, a sound source in the center position is necessarily positioned in center regardless of the spatializer effect value.



■ Usage Notes

1. Do not apply 0.3 V or more to pin 12 because it relates with pin 13 (V<sub>CC</sub> pin)
2. If more than 0.3 V is applied to pin 12, the current flows to pin 13 (V<sub>CC</sub> pin) via a surge protection diode connected to pin 12.
3. Spatializer® is a registered logo of Desper Products Inc.  
The use of this device requires the approval of Desper Products Inc.