

# 8-BIT SHIFT REGISTERS

# S54199 N74199

S54199-N,F,Q • N74199-N,F

DIGITAL 54/74 TTL SERIES

## DESCRIPTION

These 8-bit shift registers are compatible with most other TTL, DTL, and MSI logic families. All inputs are buffered to lower the drive requirements to one normalized Series 54/74 load, and input clamping diodes minimize switching transients to simplify system design. Maximum input clock frequency is typically 35 megahertz and power dissipation is typically 360 mW.

These synchronous 8-bit registers feature parallel inputs, parallel outputs, J-K serial inputs, shift/load control input, a direct overriding clear line, and gated clock inputs. The register has three modes of operation:

- Parallel (Broadside) Load
- Shift (In the direction  $Q_A$  toward  $Q_H$ )
- Inhibit Clock (Do nothing)


Parallel loading is accomplished by applying the 8 bits of data and taking the shift/load control input low when the clock input is not inhibited. The data is loaded into the associated flip-flop and appears at the outputs after the positive transition of the clock input. During loading, serial data flow is inhibited.

Shifting is accomplished synchronously when shift/load is high and the clock input is not inhibited. Serial data for this mode is entered at the J-K inputs. See the J-K inputs truth table for states required to enter serial data into the first flip-flop.

Both of the clock inputs are identical in function and may be used interchangeably to serve as clock or clock-inhibit inputs. Holding either high inhibits clocking, but when one is held low, a clock input applied to the other input is passed to the eight flip-flops of the register. The clock-inhibit input should be changed to the high level only while the clock input is high.


These shift registers contain the equivalent of 79 TTL gates. Average power dissipation per gate is typically 4.55 mW.

## LOGIC DIAGRAM

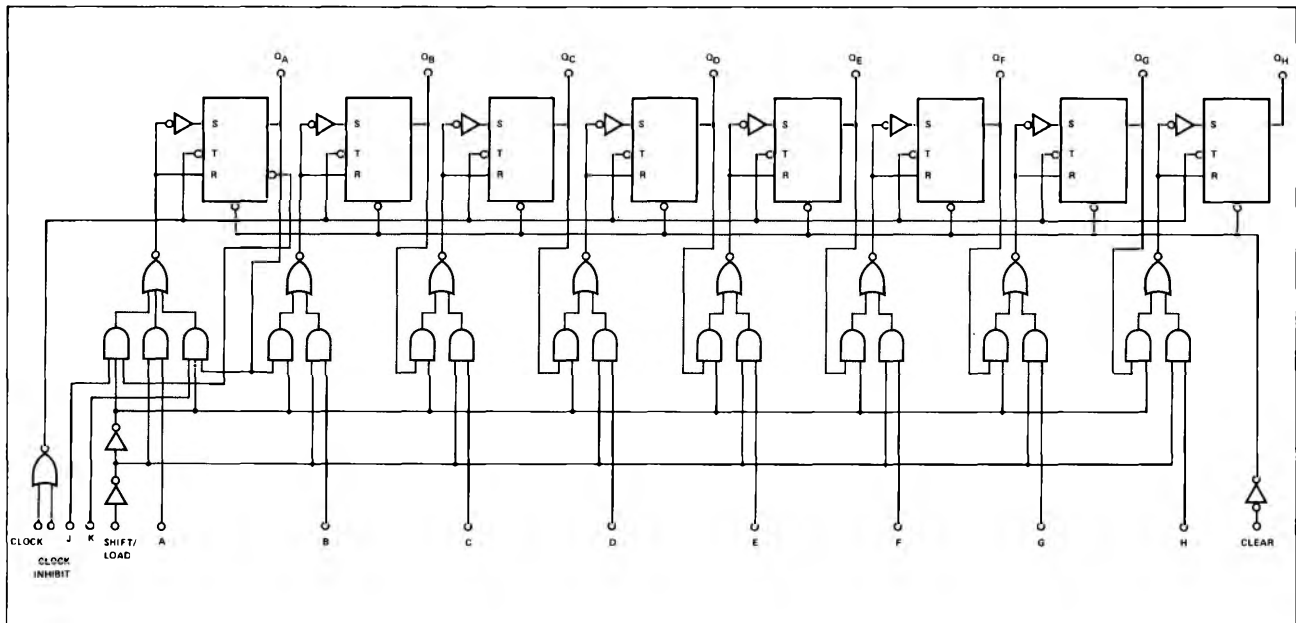

## PIN CONFIGURATIONS

### N,F,Q PACKAGES

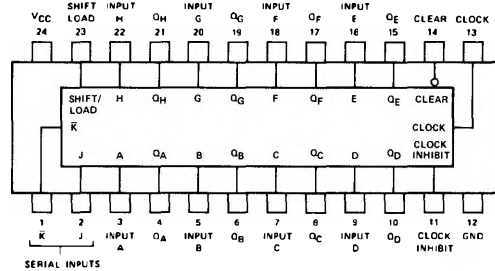

†Pin assignments for these circuits are the same for packages.

## TRUTH TABLE

INPUTS at $t_n$		OUTPUT at $t_{n+1}$
J	K	$Q_A$
L	H	$Q_{An}$
L	L	L
H	H	H
H	L	$\overline{Q_{An}}$

### NOTES:

- A.  $t_n$  = bit time before clock pulse
- B.  $t_{n+1}$  = bit time after clock pulse

H - high level, L = low level

SIGNETICS DIGITAL 54/74 TTL SERIES — S54199 • N74199

RECOMMENDED OPERATING CONDITIONS

	S54199			N74199			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
Supply Voltage $V_{CC}$	4.5	5	5.5	4.75	5	5.25	V
Normalized Fan-Out From each output, N: High logic level			20			20	
Low logic level			10			10	
Input Count Frequency, $f_{count}$	0		25	0		25	MHz
Width of Clock or Clear Pulse, $t_w$	20			20			ns
Mode-Control Setup Time, $t_{setup}$	30			30			ns
Data Setup Time, $t_{setup}$	20			20			ns
Hold Time at any Input, $t_{hold}$	0			0			ns
Operating Free-Air Temperature, $T_A$	-55	25	125	0	25	70	°C

ELECTRICAL CHARACTERISTICS (over recommended operating free-air temperature range unless otherwise noted)

PARAMETER		TEST CONDITIONS *	S54199			N74199			UNIT
			MIN	TYP*	MAX	MIN	TYP*	MAX	
$V_{IH}$	High-level input voltage		2			2		V	
$V_{IL}$	Low-level input voltage				0.8		0.8	V	
$V_I$	Input clamp voltage	$V_{CC} = MAX, I_I = -12mA$			-1.5		-1.5	V	
$V_{OH}$	High-level output voltage	$V_{CC} = MIN, V_{IH} = 2V, V_{IL} = 0.8V, I_{OH} = -800\mu A$	2.4			2.4		V	
$V_{OL}$	Low-level output voltage	$V_{CC} = MIN, V_{IH} = 2V, V_{IL} = 0.8V, I_{OL} = 16mA$			0.4		0.4	V	
$I_I$	Input current at maximum input voltage	$V_{CC} = MAX, V_I = 5.5V$			1		1	mA	
$I_{IH}$	High-level input current	$V_{CC} = MAX, V_I = 2.4V$			40		40	$\mu A$	
$I_{IL}$	Low-level input current	$V_{CC} = MAX, V_I = 0.4V$			-1.6		-1.6	mA	
$I_{OS}$	Short-circuit output current†	$V_{CC} = MAX$	-20		-57	-18	-57	mA	
$I_{CC}$	Supply current	$V_{CC} = MAX, Table Below$		72	104		72	116	mA

SWITCHING CHARACTERISTICS,  $V_{CC} = 5V, T_A = 25^\circ C, N = 10$

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{max}$	Maximum input count frequency	25	35		MHz
$t_{PHL}$	Propagation delay time, high-to-low-level output from clear		23	35	ns
$t_{PHL}$	Propagation delay time, high-to-low-level output from clock	8	20	30	ns
$t_{PLH}$	Propagation delay time, low-to-high-level output from clock	8	17	26	ns

\* For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

\*\* All typical values are at  $V_{CC} = 5V, T_A = 25^\circ C$ .

† Not more than one output should be shorted at a time.

TEST CONDITIONS FOR  $I_{CC}$  (all outputs are open)

TYPE	APPLY 4.5V	FIRST GROUND, THEN APPLY 4.5V	GROUND
S54199, N74199	J, $\bar{K}$ , Inputs A thru H	Clock	Clock Inhibit, Clear, Shift/Load