

TV VERTICAL DEFLECTION BOOSTER

ADVANCE DATA


- POWER AMPLIFIER
- FLYBACK SUPPLY VOLTAGE SEPARATED
- THERMAL PROTECTION
- CURRENT LIMITED TO GND

DESCRIPTION


Designed for Monitors and high performance TVs, the TDA8179F vertical deflection booster is able to work with a flyback voltage more than the double at V_s .

The TDA8179F operates with supplies up to 50V, flyback supply voltage up to 100V and provides up to 2App output current to drive to yoke.


The TDA8179F is offered in HEPTAWATT package.

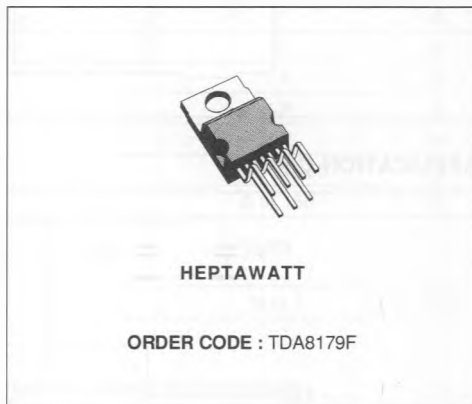


BLOCK DIAGRAM

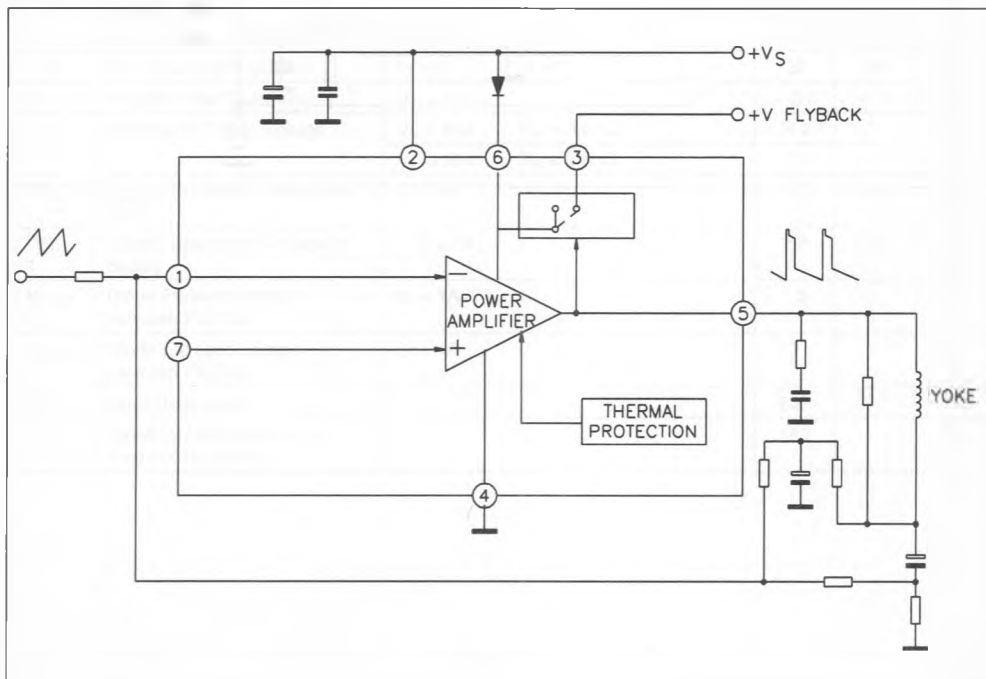

PIN CONNECTION (top view)

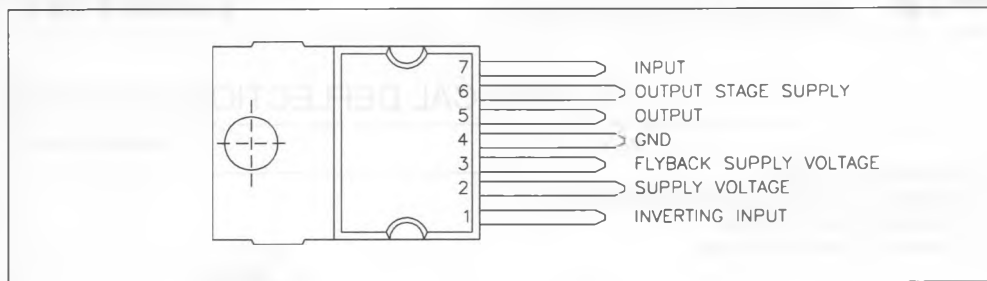

APPLICATION CIRCUIT

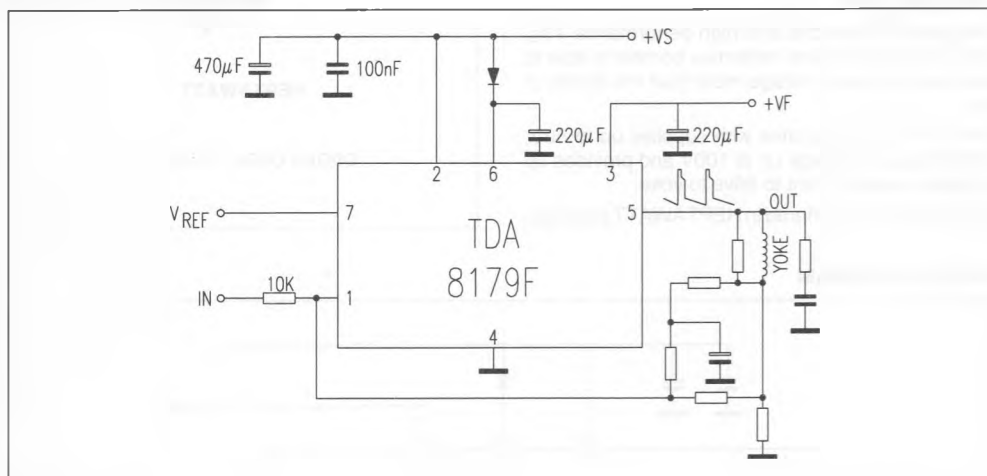

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_s	Supply Voltage (pin 2)	50	V
V_F	Flyback Supply Voltage	100	V
$V_F - V_s$	Difference between Flyback Supply Voltage and Supply Voltage	50	V
V_1, V_7	Amplifier Input Voltage	$+ V_s$	
I_O	Output Peak Current (non repetitive, $t = 2\text{ms}$)	2	A
I_O	Output Peak Current at $f = 50$ or 60Hz $t \leq 10\mu\text{s}$	2	A
I_O	Output Peak Current at $f = 50$ or 60Hz $t > 10\mu\text{s}$	1.8	A
I_3	Pin 3 Peak Flyback Current at $f = 50$ or 60Hz , $t_{fly} \leq 1.5\text{ms}$	1.8	A
P_{tot}	Total Power Dissipation at $T_{case} = 70^\circ\text{C}$	20	W
T_{stg}	Storage Temperature	-40 to 150	$^\circ\text{C}$
T_j	Junction Temperature	0 to 150	$^\circ\text{C}$


THERMAL DATA

$R_{th\ J-c}$	Thermal Resistance Junction-case	Max 3	$^\circ\text{C/W}$
---------------	----------------------------------	-------	--------------------

ELECTRICAL CHARACTERISTICS

($V_7 = 2.2\text{V}$, $V_s = 48\text{V}$, $T_{amb} = 25^\circ\text{C}$, unless otherwise specified, refer to the test circuits)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_s	Operating Supply Voltage Range		10		48	V
I_2	Pin 2 Quiescent Current	$I_3 = 0$ $I_5 = 0$		10	20	mA
I_6	Pin 6 Quiescent Current	$I_3 = 0$ $I_5 = 0$		20	40	mA
I_1	Amplifier bias Current	$V_7 = 1\text{V}$		-0.2	-1	μA
V_5	Quiescent Output Voltage	$V_s = 48\text{V}$ $R_a = 3.9\text{K}\Omega$		24.2		V
		$V_s = 35\text{V}$ $R_a = 5.6\text{K}\Omega$		17.5		
V_{5L}	Output Saturation Voltage to GND	$I_5 = 1\text{A}$		1.2	1.5	V
V_{5H}	Output Saturation Voltage to Supply	$-I_5 = 1\text{A}$		2.2	2.6	V
V_{D5-6}	Diode Forward Voltage between Pin 5-6	$I_D = 1\text{A}$		1.5		V
V_{D3-6}	Diode Forward Voltage between Pin 3-6	$I_3 = 1\text{A}$		2		V
R_1	Input Resistance			200		$\text{K}\Omega$
T_j	Junction Temperature for Thermal Shutdown			140		$^\circ\text{C}$

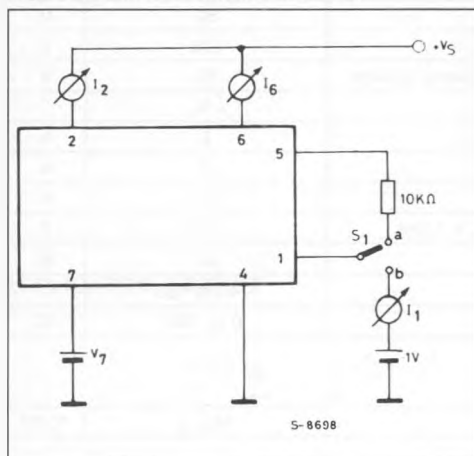Figure 1 : DC Test Circuits.**Figure 1a : Measurement of I_1 ; I_2 ; I_6 .**

S1 : (a) I_2 and I_6 ; (b) I_1 .



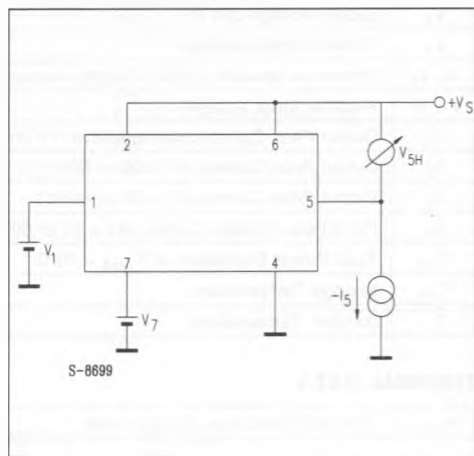
Figure 1b : Measurement of V_{5H} .**Figure 1c : Measurement of V_{5L} .****Figure 1d : Measurement of V_5 .**

Figure 2 : SOA of Each Output Power Transistor at 25°C amb.

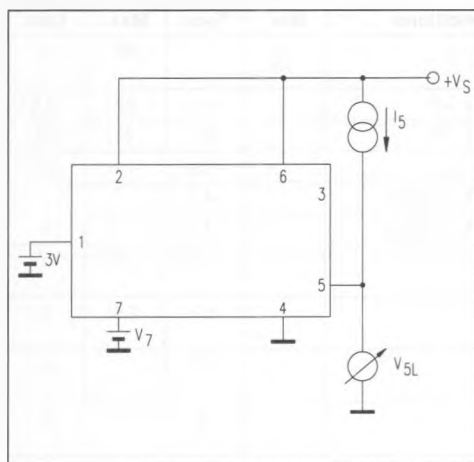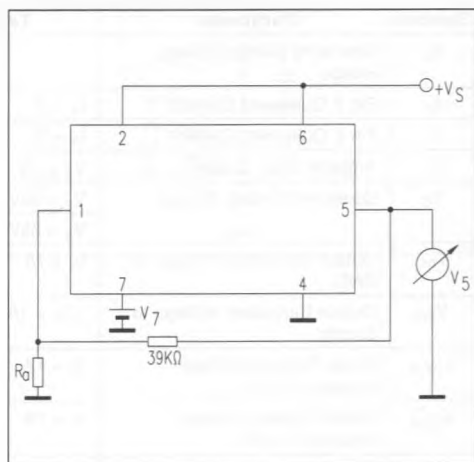