

1N4245 THRU 1N4249

New Jersey Semi-Conductor Products, Inc.


20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 200 to 1000 Volts Forward Current - 1.0 Ampere

DO-204AP

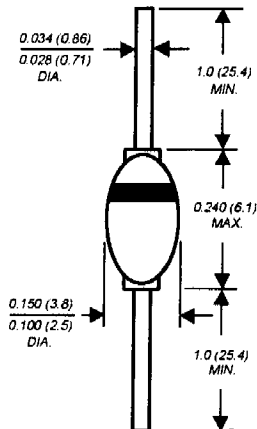

Dimensions in inches and (millimeters)

* Brazed-lead assembly is covered by Patent No. 3,930,306

FEATURES

- ◆ High temperature metallurgically bonded construction
- ◆ 1.0 Ampere operation
 $T_A=55^\circ\text{C}$ with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ Hermetically sealed package
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ High temperature soldering guaranteed:
 $350^\circ\text{C}/10$ seconds, $0.375''$ (9.5mm) lead length,
 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: JEDEC DO-204AP solid glass body
Terminals: Solder plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.02 ounce, 0.56 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	1N4245	1N4246	1N4247	1N4248	1N4249	UNITS
* Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	Volts
* Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	Volts
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{(AV)}$	1.0					Amp
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0					Amps
* Maximum instantaneous forward voltage at 1.0A	V_F	1.2					Volts
* Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$	$I_{R(AV)}$	50.0					μA
* Maximum reverse current at Rated DC blocking voltage	I_R	$T_A=25^\circ\text{C}$: 1.0 $T_A=125^\circ\text{C}$: 25.0					μA
Typical junction capacitance (NOTE 1)	C_J	15.0					pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	55.0					$^\circ\text{C}/\text{W}$
* Operating junction temperature range	T_J	-65 to +160					$^\circ\text{C}$
* Storage temperature range	T_{STG}	-65 to +200					$^\circ\text{C}$

NOTES:

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
 - (2) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted
- *JEDEC registered values



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.