

## Band-switching diodes

## BA482; BA483; BA484

### FEATURES


- Continuous reverse voltage:  
max. 35 V
- Continuous forward current:  
max. 100 mA
- Low diode capacitance:  
max. 1.0 to 1.6 pF
- Low diode forward resistance:  
max. 0.7 to 1.2  $\Omega$ .

### APPLICATION

- VHF television tuners.

### DESCRIPTION

Planar high performance band-switching diode in a hermetically sealed glass SOD68 (DO-34) package.

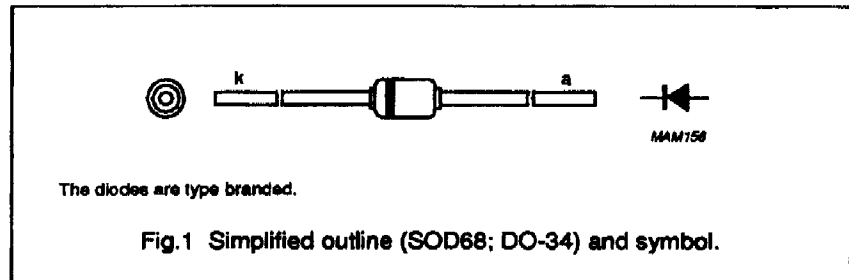

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
$V_R$	continuous reverse voltage	-	35	V
$I_F$	continuous forward current	-	100	mA
$T_{stg}$	storage temperature	-65	+150	$^{\circ}\text{C}$
$T_j$	junction temperature	-	150	$^{\circ}\text{C}$

### ELECTRICAL CHARACTERISTICS

$T_j = 25^{\circ}\text{C}$  unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$V_F$	forward voltage	$I_F = 100 \text{ mA}$ ; see Fig.2	-	1.2	V
$I_R$	reverse current	see Fig.3 $V_R = 20\text{V}$ $V_R = 20 \text{ V}; T_{amb} = 75^{\circ}\text{C}$	-	100	nA
$C_d$	diode capacitance	$f = 1 \text{ to } 100 \text{ MHz}; V_R = 3 \text{ V}$ ; see Fig.4	0.8	1.2	pF
	BA482				
	BA483				
$r_D$	diode forward resistance	$I_F = 3 \text{ mA}; f = 200 \text{ MHz}$ ; see Fig.5	0.8	1.6	pF
	BA482				
	BA483				
	BA484		0.6	0.7	$\Omega$
	BA482		0.8	1.2	$\Omega$
	BA483		0.8	1.2	$\Omega$





**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j\text{-}tp}$	thermal resistance from junction to tie-point	lead length 10 mm	300	K/W
$R_{th\ j\text{-}a}$	thermal resistance from junction to ambient	lead length 10 mm; note 1	500	K/W

**Note**

1. Device mounted on a FR4 printed-circuit board without metallization pad.


**GRAPHICAL DATA**

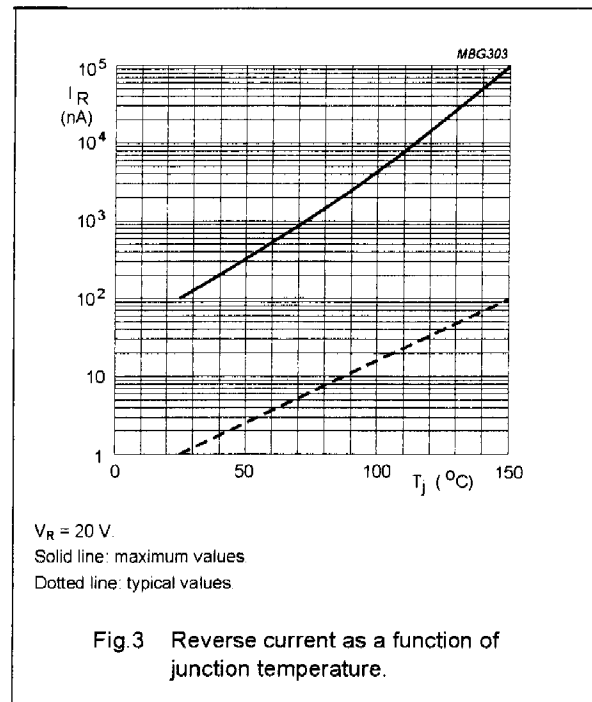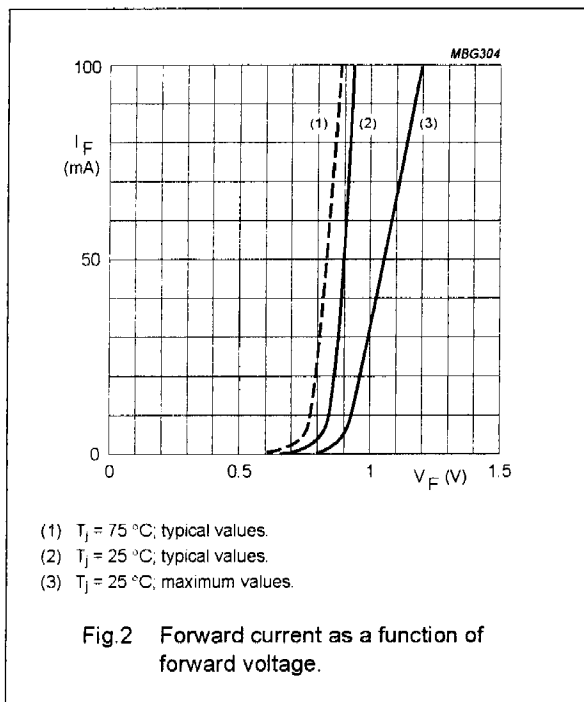

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th(j-p)}$	thermal resistance from junction to tie-point	lead length 10 mm	300	K/W
$R_{th(j-a)}$	thermal resistance from junction to ambient	lead length 10 mm; note 1	500	K/W

**PACKAGE OUTLINE**

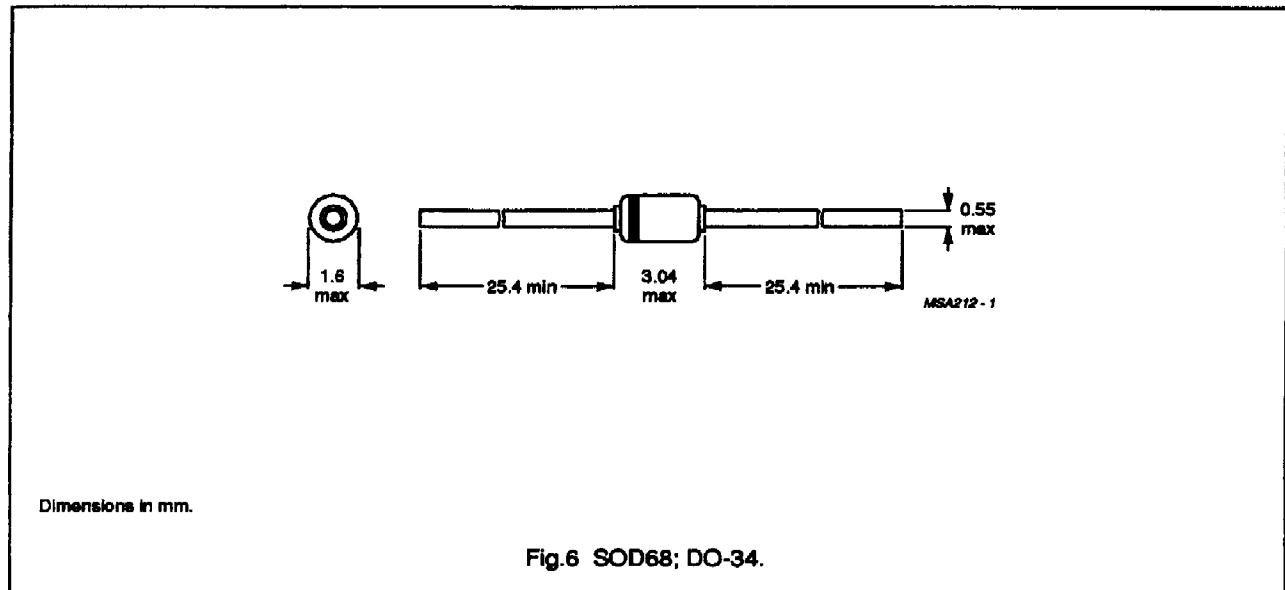

**DEFINITIONS**

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	