
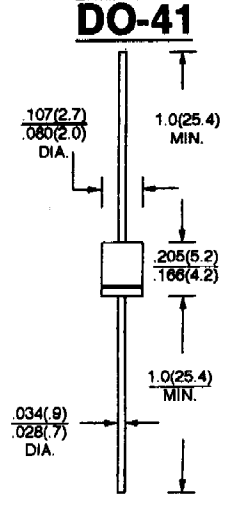


20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

BY127, BY133
EM513, EM516, EM520
0.25 TO 0.5AMP
SILICON RECTIFIERS

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

 <p>FEATURES</p> <ul style="list-style-type: none"> * Low forward voltage drop * High current capability * High reliability * High surge current capability <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> * Case: Molded plastic * Epoxy: UL 94V-0 rate flame retardant * Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed * Polarity: Color band denotes cathode end * Mounting Position: Any * Weight: 0.34 grams 	<p style="text-align: center;">VOLTAGE RANGE 1250 to 2000 Volts CURRENT 0.5 Ampere</p> <p style="text-align: center;">DO-41</p>  <p style="text-align: center;">Dimensions in inches and (millimeters)</p>
--	--

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS
Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	BY127	BY133	EM513	EM516	EM520	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1250	1400	1600	1800	2000	V
Maximum RMS Voltage	V_{RMS}	875	910	1120	1260	1400	V
Maximum D. C Blocking Voltage	V_{OC}	1250	1300	1600	1800	2000	V
Maximum Average Forward Rectified Current .375" (9.5mm) lead length @ $T_A = 50^\circ C$	$I_{F(AV)}$	0.5					A
Peak Forward Surge Current, 8.3 ms single half sine - wave superimposed on rated load (JEDEC method)	I_{FSM}	25					A
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.0		1.1			V
Maximum D. C Reverse Current @ $T_A = 25^\circ C$ At Rated D. C Blocking Voltage @ $T_A = 100^\circ C$	I_R	5.0 80.0		5.0 100			μA μA
Typical Junction Capacitance (Note 1)	C_J	8		6			pF
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	80		110			$^\circ C/W$
Operation Temperature Range	T_J	- 65 to + 125					$^\circ C$
Storage Temperature Range	T_{STG}	- 65 to + 125					$^\circ C$

NOTE: (1) Measured at 1 MHz and applied reverse voltage of 4.0 V. D. C.
(2) Thermal resistance from Junction to Ambient 0.375" (9.5mm) Lead Length, P. C. B routed

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

