

Silicon NPN Power Transistors

2N6653

DESCRIPTION

- With TO-3 package
- High voltage capability
- Fast switching speeds
- Low saturation voltage

APPLICATIONS

- Switching regulators
- Inverters
- Solenoid and relay drivers
- Deflection circuits

PINNING (See Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

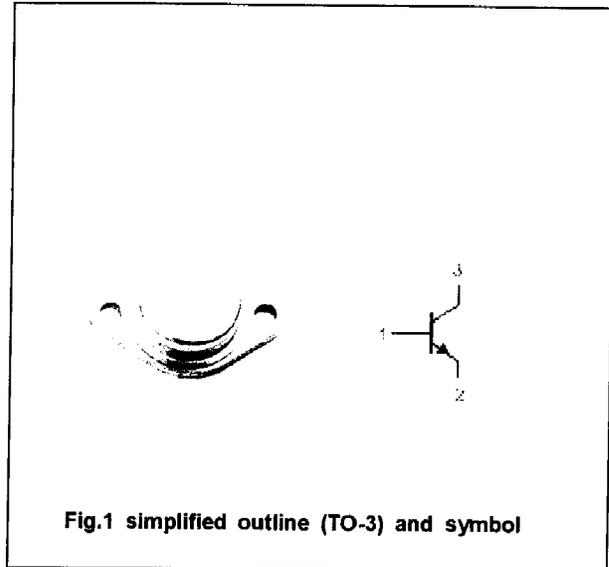


Fig.1 simplified outline (TO-3) and symbol


MAXIMUM RATINGS(Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CB0}	Collector-base voltage	Open emitter	350	V
V _{CE0}	Collector-emitter voltage	Open base	300	V
V _{EB0}	Emitter-base voltage	Open collector	6	V
I _c	Collector current		20	A
I _{CM}	Collector current-peak		30	A
P _T	Total power dissipation	T _c =25°C	150	W
T _j	Junction temperature		200	°C
T _{stg}	Storage temperature		-65~200	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th-jc}	Thermal resistance from junction to case	1.0	°C/W

NJ Semi-Conductors reserves the right to change test conditions, parameters limits and package dimensions without notice information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Silicon NPN Power Transistors

2N6653

CHARACTERISTICS

T_J=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CE0(SUS)}	Collector-emitter sustaining voltage	I _C =0.1A ; I _B =0	300			V
V _{(BR)CBO}	Collector-emitter breakdown voltage	I _C =1mA ; I _E =0	350			V
V _{CEsat-1}	Collector-emitter saturation voltage	I _C =10A ; I _B =2A			1.5	V
V _{CEsat-2}	Collector-emitter saturation voltage	I _C =15A ; I _B =3A			1.8	V
V _{BEsat}	Base-emitter saturation voltage	I _C =15A ; I _B =3A			1.8	V
I _{CEV}	Collector cut-off current	V _{CE} =350V ; V _{BE(off)} =-1.5V T _C =150L			0.1 2.0	mA
I _{EBO}	Emitter cut-off current	V _{EB} =6V ; I _C =0			0.1	mA
h _{FE-1}	DC current gain	I _C =1A ; V _{CE} =5V	15		50	
h _{FE-2}	DC current gain	I _C =15A ; V _{CE} =5V	10			
f _T	Transition frequency	I _C =0.5A ; V _{CE} =10V		15		MHz

