



SCHEMATIC DIAG

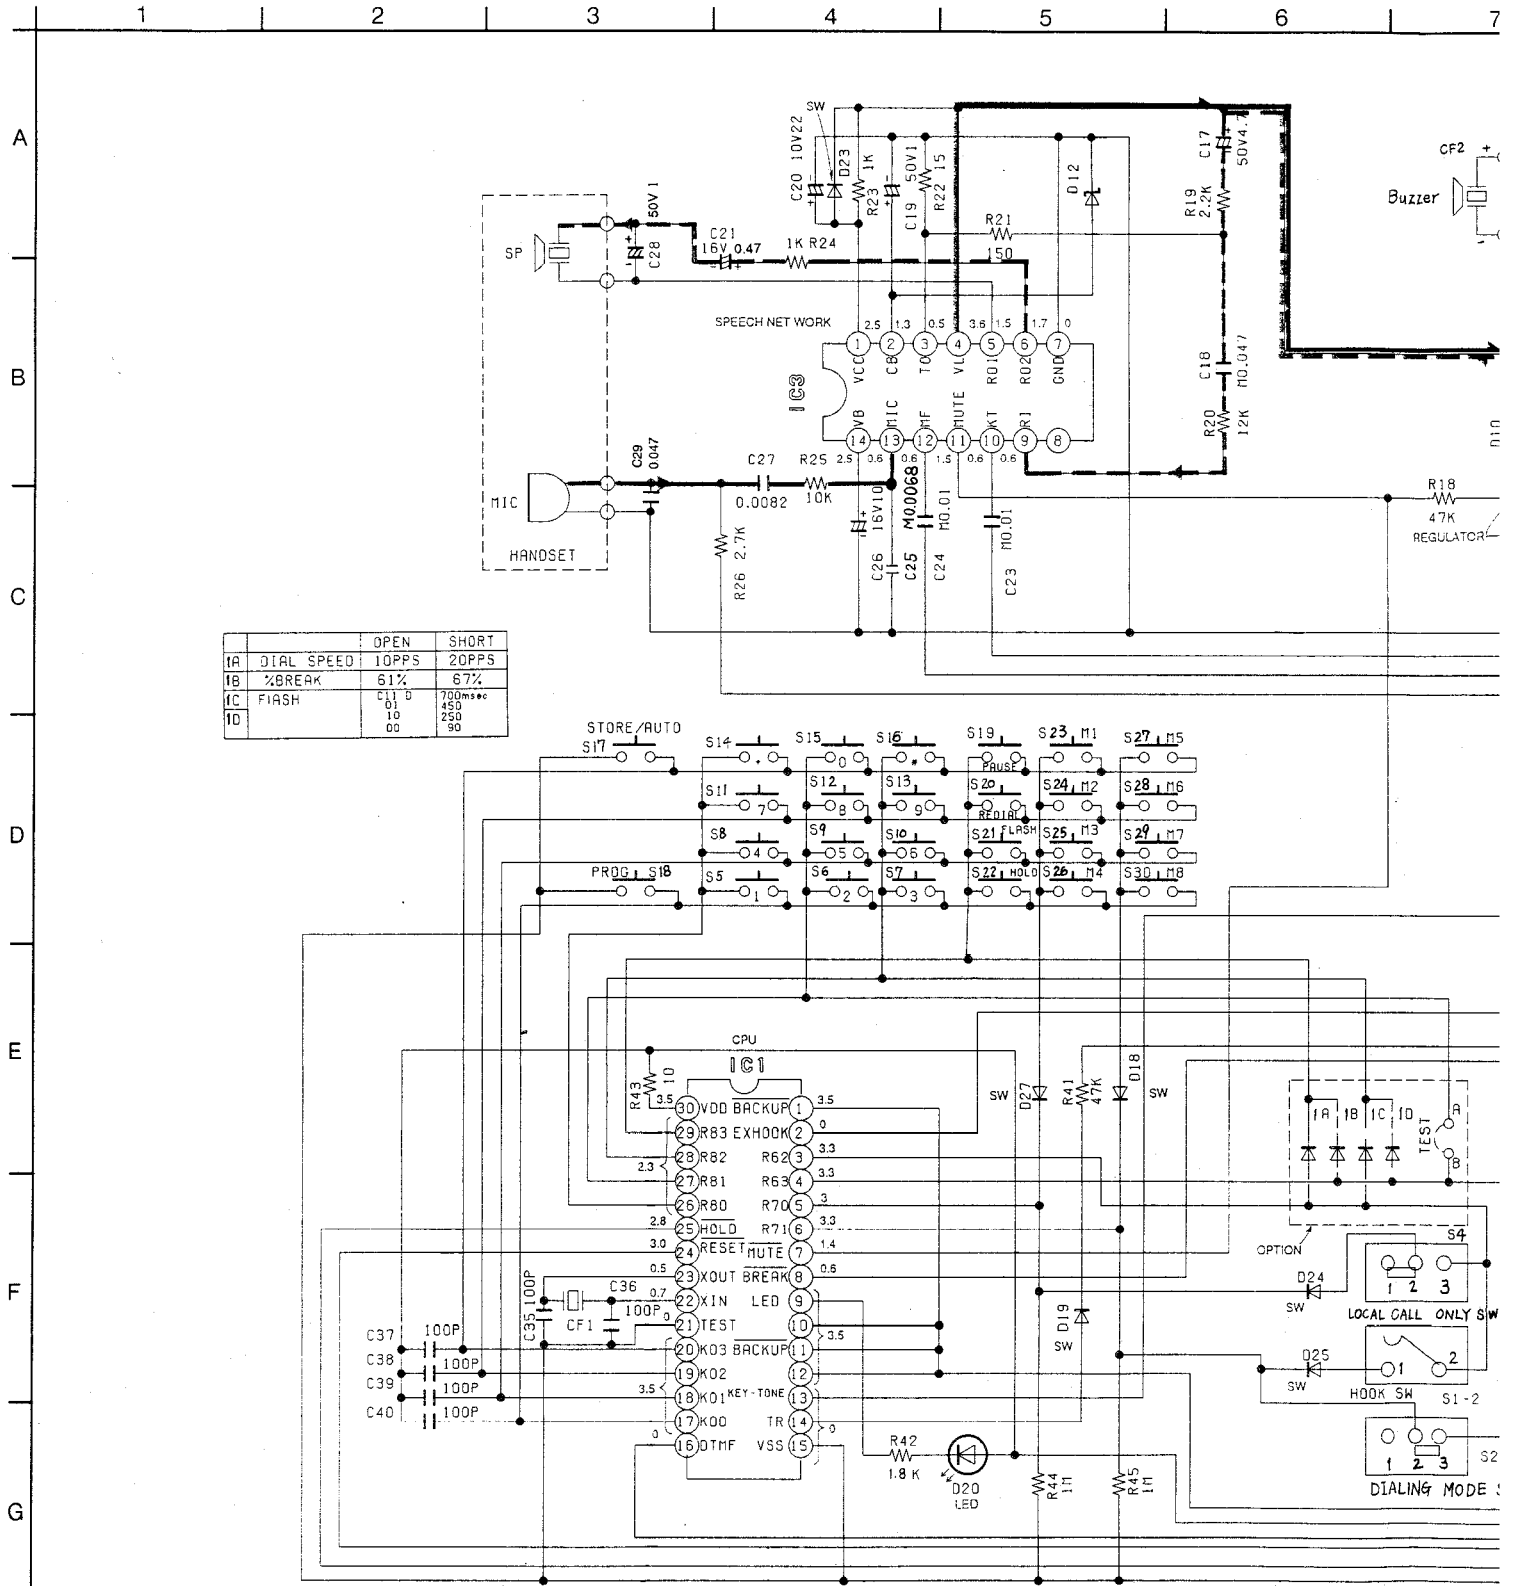

Notes:


- 1. S1: Hook switch in "ON-HOOK" position.
- 2. S2: Dialing mode selector switch in "TONE" position.
- 3. S3: Ringer volume selector switch in "HIGH" position.
- 4. S4: Local call only switch.
- 5. S5-16: Dialing switch.
- 6. S17: Auto/Store switch.
- 7. S18: Program switch.
- 8. S19: Pause switch.
- 9. S20: Redial switch.

- 10. S21: Flash switch.
- 11. S22: Hold switch.
- 12. S23-30: Direct switch.
- 13. DC voltage measurements are taken with electronic voltmeter from negative terminal of battery. (Add 40 mA to telephone line from the loop simulator.)
- 14. This schematic diagram may be modified at any time with the development of new technology.



MATIC DIAGRAM

7 8 9 10 11 12

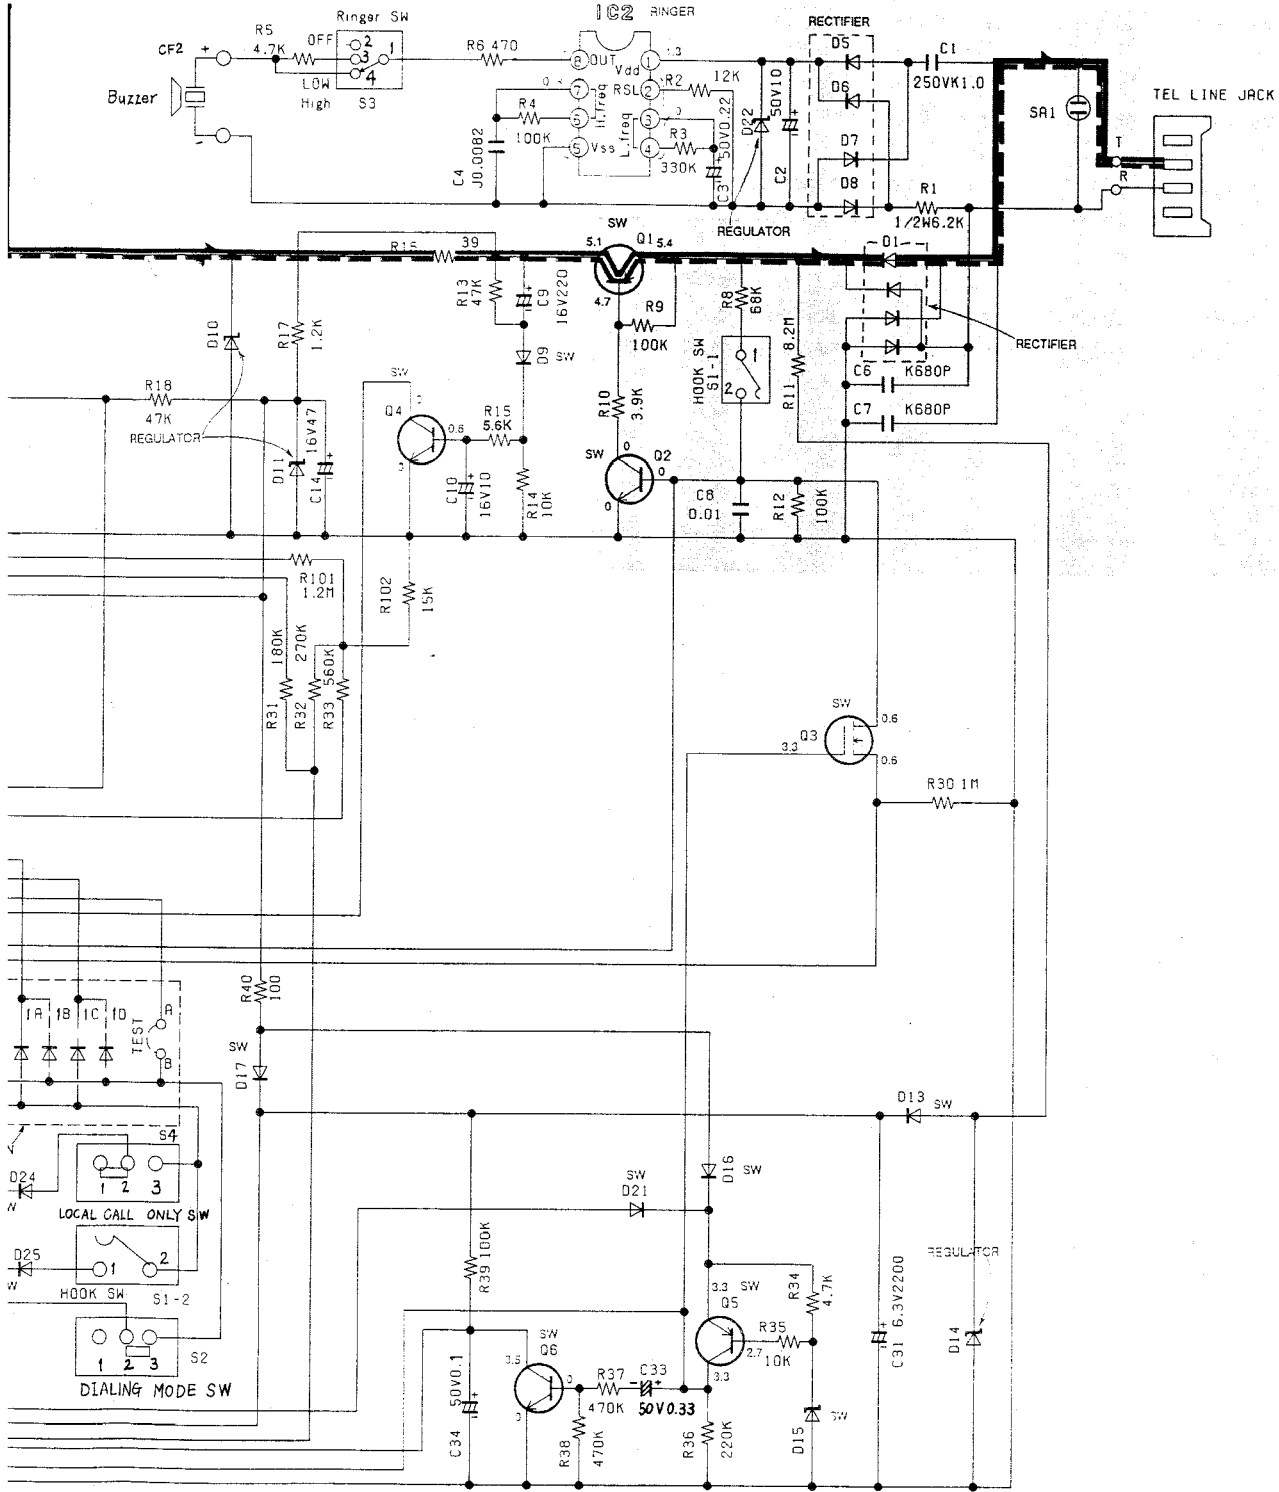

Note: SW=Switching

15. **Important safety notice**

The shaded area on this schematic diagram incorporates special features important for protection from fire and electrical shock hazards. When servicing it is essential that only manufacturer's specified parts be used for the critical components in the shaded areas of the schematic.

ic voltmeter
tor.)
y time with

