

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



May 1998 Revised October 2004

NC7SZ374

TinyLogic® UHS D-Type Flip-Flop with 3-STATE Output

General Description

The NC7SZ374 is a single positive edge-triggered D-type CMOS Flip-Flop with 3-STATE output from Fairchild's Ultra High Speed Series of TinyLogic® in the space saving SC70 6-lead package. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a very broad $V_{\rm CC}$ operating range. The device is specified to operate over the 1.65V to 5.5V $V_{\rm CC}$ range. The inputs and output are high impedance when $V_{\rm CC}$ is 0V. Inputs tolerate voltages up to 7V independent of $V_{\rm CC}$ operating voltage. This single flip-flop will store the state of the D input that meets the setup and hold time requirements on the LOW-to-HIGH Clock (CP) transition. The output tolerates voltages above $V_{\rm CC}$ in the 3-STATE condition.

Features


- Space saving SC70 6-lead package
- Ultra small MicroPak™ leadless package
- Ultra High Speed; t_{PD} 2.6 ns Typ into 50 pF at 5V V_{CC}
- High Output Drive; ±24 mA at 3V V_{CC}
- Broad V_{CC} Operating Range; 1.65V to 5.5V
- \blacksquare Matches the performance of LCX when operated at 3.3V V_{CC}
- Power down high impedance inputs/output
- Overvoltage tolerant inputs facilitate 5V 3V translation
- Patented noise/EMI reduction circuitry implemented

Ordering Code:

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As
NC7SZ374P6X	MAA06A	Z74	6-Lead SC70, EIAJ SC88, 1.25mm Wide	3k Units on Tape and Reel
NC7SZ374L6X	MAC06A	C9	6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel

 $\label{eq:total_cond} \mbox{TinyLogic@ is a registered trademark of Fairchild Semiconductor Corporation.} \\ \mbox{MicroPak}^{\mbox{\tiny TM}} \mbox{ is a trademark of Fairchild Semiconductor Corporation.} \\$

Logic Symbol



Pin Descriptions


Pin Names	Description
D	Data Input
CP	Clock Pulse Input
ŌĒ	Output Enable Input
Q	Flip-Flop Output

Function Table

	Inputs						
СР	D	OE	Q				
~	L	L	L				
~	Н	L	Н				
~	Х	L	Q_n				
Х	Х	Н	Z				

 $\begin{array}{lll} H = HIGH\ Logic\ Level & Z = High\ Impedance & X = Immaterial \\ L = LOW\ Logic\ Level & Q_n = No\ change\ in\ data & \end{array}$

Connection Diagrams




Pin One Orientation Diagram



AAA represents Product Code Top Mark - see ordering code

Note: Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

Pad Assignment for MicroPak



(Top Thru View)

Absolute Maximum Ratings(Note 1)

-0.5V to +7.0V Supply Voltage (V_{CC}) DC Input Voltage (V_{IN}) -0.5V to +7.0V -0.5V to +7.0V DC Output Voltage (V_{OUT}) DC Input Diode Current (I_{IK}) $V_{IN} < 0V$ -50 mA DC Output Diode Current (IOK) $V_{OUT} < 0V$ -50 mA DC Output (I_{OUT}) Source/Sink Current $\pm\,50~\text{mA}$ DC V_{CC}/GND Current (I_{CC}/I_{GND}) \pm 50 mA Storage Temperature Range (T_{STG}) –65°C to +150°C Junction Temperature under Bias (T_J) 150°C Junction Lead Temperature (T_L) 260°C (Soldering, 10 seconds)

Recommended Operating Conditions (Note 2)

Power Supply	
Operating (V _{CC})	1.65V to 5.5V
Data Retention	1.5V to 5.5V
Input Voltage (V _{IN})	0V to 5.5V
Output Voltage (V _{OUT})	
Active State	0V to V _{CC}
3-STATE	0V to 5.5V
Input Rise and Fall Time (t_r, t_f)	
$V_{CC} = 1.8V$, $2.5V \pm 0.2V$	0 to 20 ns/V
$V_{CC} = 3.3V \pm 0.3V$	0 to 10 ns/V
$V_{CC} = 5.5V \pm 0.5V$	0 to 5 ns/V
Operating Temperature (T _A)	-40°C to +85°C
Thermal Resistance (θ ₁ Δ)	350° C/W

Note 1: Absolute Maximum Ratings: are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

Power Dissipation (P_D) @ +85°C

Symbol	Parameter	v _{cc}	T _A = +25°	С		T _A = -40°C to +85°C			Units Conditions	
Symbol	Parameter	(V)	Min	Тур	Max	Min	Max	Units	Col	nations
V _{IH}	HIGH Level Control	1.65 to 1.95	0.75 V _{CC}			0.75 V _{CC}		V		
	Input Voltage	2.3 to 5.5	0.75 V _{CC}			0.7 V _{CC}		٧		
V _{IL}	LOW Level Control	1.65 to 1.95			0.25 V _{CC}		0.25 V _{CC}	V		
	Input Voltage	2.3 to 5.5			0.3 V _{CC}		0.3 V _{CC}	V		
/он	HIGH Level Control	1.65	1.55	1.65		1.55				
	Output Voltage	1.8	1.7	1.8		1.7				
		2.3	2.2	2.3		2.2				$I_{OH} = -100 \mu A$
		3.0	2.9	3.0		2.9				
		4.5	4.4	4.5		4.4		V	V V	
		1.65	1.24	1.52		1.29		٧	$V_{IN} = V_{IH}$	$I_{OH} = -4 \text{ mA}$
		2.3	1.9	2.15		1.9				$I_{OH} = -8 \text{ mA}$
		3.0	2.4	2.8		2.4				$I_{OH} = -16 \text{ m/s}$
		3.0	2.3	2.68		2.3				$I_{OH} = -24 \text{ m/s}$
		4.5	3.8	4.2		3.8				$I_{OH} = -32 \text{ mA}$
/ _{OL}	LOW Level Control	1.65		0.0	0.1		0.1			
	Output Voltage	1.8		0.0	0.1		0.1			
		2.3		0.0	0.1		0.1			$I_{OL} = 100 \mu A$
		3.0		0.0	0.1		0.1			
		4.5		0.0	0.1		0.1	V	$V_{IN} = V_{IH}$	
		1.65		0.08	0.24		0.24	٧	VIN = VIH	$I_{OL} = 4 \text{ mA}$
		2.3		0.10	0.3		0.3			$I_{OL} = 8 \text{ mA}$
		3.0		0.15	0.4		0.4			$I_{OL} = 16 \text{ mA}$
		3.0		0.22	0.55		0.55			$I_{OL} = 24 \text{ mA}$
		4.5		0.22	0.55		0.55			$I_{OL} = 32 \text{ mA}$
IN	Input Leakage Current	0 to 5.5			±0.1		±1.0	μΑ	0 ≤ V _{IN} ≤ 5.5V	
OZ	3-STATE Output Leakage	1.65 to 5.5			±0.5		±5.0	μΑ	V _{IN} = V _{IL} or V _{IH}	
									0 ≤ V _{OUT} ≤ 5.5V	
OFF	Power Off Leakage Current	0.0			1.0		10	μΑ	V _{IN} or V _{OUT}	= 5.5V
СС	Quiescent Supply Current	1.65 to 5.5			1.0		10.0	μΑ	$V_{IN} = 5.5V, G$	SND

180 mW

AC Electrical Characteristics

Cumbal	Davamatav	V _{CC}		T _A = +25°(С	$T_A = -40^{\circ}C$	$T_A = -40^{\circ}C$ to $+85^{\circ}C$		Conditions	Figure
Symbol	Parameter	(V)	Min	Тур	Max	Min	Max	Units	Conditions	Number
f _{MAX}	Maximum Clock	1.65				100				
	Frequency	1.8				100				
		2.5 ± 0.2				125		MHz	C _L = 50 pF	Figures 1, 3
		3.3 ± 0.3				150			$R_D = 500\Omega$, $S_1 = Open$	1,0
		5.0 ± 0.5				175				
		1.65	2.5	9.7	1.50	2.5	16.5			
t _{PLH}	Propagation Delay	1.8	2.5	6.5	10.0	2.5	11.0			
t _{PHL}	CP to Q	2.5 ± 0.2	2.0	3.8	6.5	2.0	7.0		C _L = 15 pF	Figures 1, 3
		3.3 ± 0.3	1.5	2.8	4.5	1.4	5.0	ns	$R_D = 1 M\Omega$., 0
		5.0 ± 0.5	1.0	2.2	3.5	1.0	3.8		S ₁ = Open	
		3.3 ± 0.3	2.0	3.4	5.5	1.6	6.2		C _L = 50 pF	Figures
		5.0 ± 0.5	1.5	2.6	4.0	1.4	4.7		$R_D = 500 \Omega$, $S_1 = Open$	1, 3
t _{PZL}	Output Enable Time	1.65	2.0	9.0	13.5	2.0	14.3			
t_{PZH}		1.8	2.0	6.0	9.0	2.0	9.5		$C_L = 50 \text{ pF}, V_I = 2x V_{CC}$	
		2.5 ± 0.2	2.0	3.7	6.0	1.8	6.6	ns	R_U , $R_D = 500 \Omega$	Figures 1, 4
		3.3 ± 0.3	1.5	2.8	5.0	1.4	5.3		S1 = GND for t _{PZH}	1, 4
		5.0 ± 0.5	1.0	2.2	3.7	1.0	3.9		S1 = V _I for t _{PZL}	
		1.65	2.0	7.7	12.0	2.0	13.0			
t_{PLZ}	Output Disable Time	1.8	2.0	5.1	8.0	2.0	8.5		$C_L = 50 \text{ pF}, V_I = 2x V_{CC}$	
t_{PHZ}		2.5 ± 0.2	2.0	3.5	6.0	1.8	6.3	ns	R_U , $R_D = 500 \Omega$	Figures 1, 4
		3.3 ± 0.3	1.5	2.8	4.5	1.4	4.7		S1 = GND for t _{PHZ}	1, 4
		5.0 ± 0.5	1.0	2.3	3.7	1.0	3.9		S1 = V _I for t _{PLZ}	
t _S	Setup Time,	2.5 ± 0.2				2.5			C _L = 50 pF	
	CP to D	3.3 ± 0.3				2.0		ns	$R_D = 500 \Omega$, $S_1 = Open$	Figures 1, 5
		5.0 ± 0.5				1.5				1,0
t _H	Hold Time,	2.5 ± 0.2				1.5			C _L = 50 pF	
	CP to D	3.3 ± 0.3				1.5		ns	$_{D} = 500 \Omega$, $S_{1} = Open$	Figures 1, 5
		5.0 ± 0.5				1.5				1,0
t _W	Pulse Width, CP	2.5 ± 0.2				3.0			CL = 50 pF	
		3.3 ± 0.3				2.8		ns	$R_D = 500 \Omega$, $S_1 = Open$	Figures 1, 5
		5.0 ± 0.5				2.5				.,,

Capacitance (Note 3)

Symbol	Parameter	Тур	Max	Units	Conditions
C _{IN}	Input Capacitance	3		pF	V _{CC} = Open, V _{IN} 0V or V _{CC}
C _{OUT}	Output Capacitance	4		pF	$V_{CC} = 3.3V$, $V_{IN} = 0V$ or V_{CC}
C _{PD}	Power Dissipation Capacitance (Note 4)	10		pF	V _{CC} = 3.3V
		12		pΓ	V _{CC} = 5.0V

Note 3: T_A = +25C, f = 1MHz.

Note 4: C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. (See Figure 2) C_{PD} is related to I_{CCD} dynamic operating current by the expression:
I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CC}static).


AC Loading and Waveforms CP Input = AC Waveform; $t_r = t_f = 1.8 \text{ ns}$; C_L includes load and stray capacitance CP Input PRR = 10 MHz; Duty Cycle = 50% Input PRR = 1.0 MHz; $t_w = 500 \text{ ns}$ D Input PRR = 5MHz; Duty Cycle = 50% FIGURE 1. AC Test Circuit FIGURE 2. I_{CCD} Test Circuit V_{CC} CP Input 50% V_{CC} -10% 10% V_{OH} Q Output FIGURE 3. AC Waveforms OE INPUT t_{PZL} CP Input 50% OUTPUT GND ts VCC OUTPUT 50% Input GND FIGURE 4. AC Waveforms FIGURE 5. AC Waveforms


Tape and Reel Specification

TAPE FORMAT for SC70


TAI ET ORMATIO	3010			
Package	Tape	Number	Cavity	Cover Tape
Designator	Section	Cavities	Status	Status
	Leader (Start End)	125 (typ)	Empty	Sealed
P6X	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed


TAPE DIMENSIONS inches (millimeters)

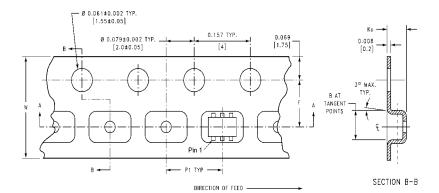

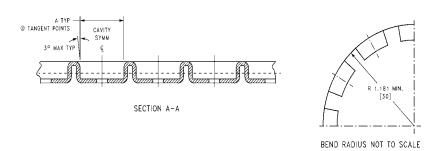


Package	Tape Size	DIM A	DIM B	DIM F	DIM K _o	DIM P1	DIM W
SC70-6	0 mm	0.093	0.096	0.138 ± 0.004	0.053 ± 0.004	0.157	0.315 ± 0.004
	8 mm	(2.35)	(2.45)	(3.5 ± 0.10)	(1.35 ± 0.10)	(4)	(8 ± 0.1)

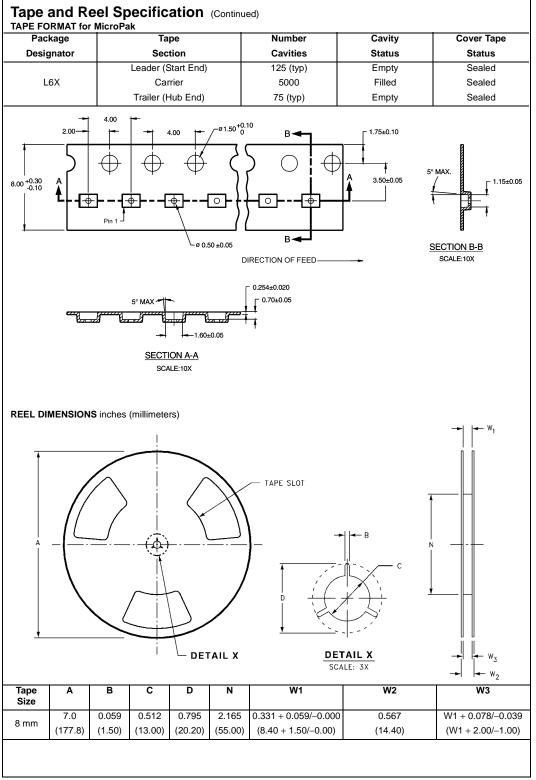

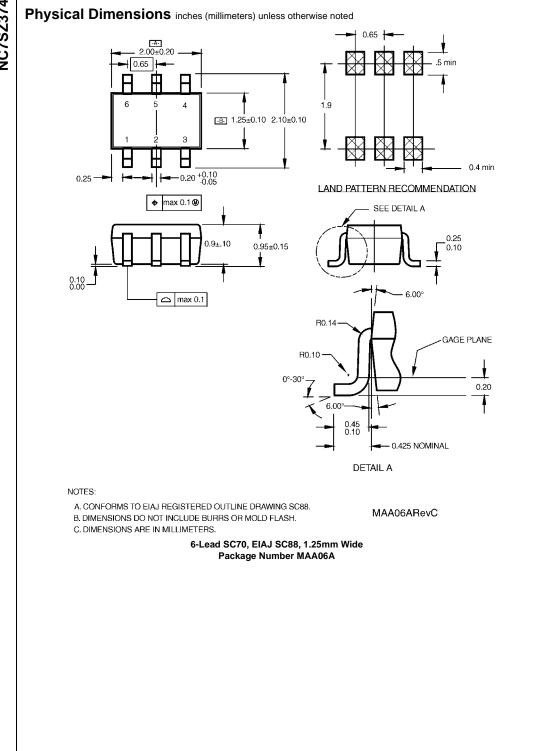

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

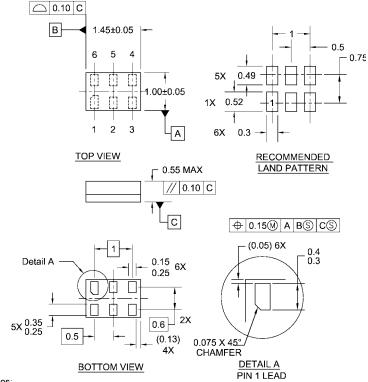

Notes:

- 1. JEDEC PACKAGE REGISTRATION IS ANTICIPATED 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06ARevB

6-Lead MicroPak, 1.0mm Wide Package Number MAC06A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative