

NC7SZD384

1-Bit Low Power Bus Switch with Level Shifting

General Description

The NC7SZD384 provides 1-bit of high-speed CMOS TTL-compatible bus switch. The low on resistance of the switch allows inputs to be connected to outputs with minimal propagation delay and without generating additional ground bounce noise. The device is organized as a 1-bit switch with a bus enable $\overline{(OE)}$ signal. When \overline{OE} is LOW, the switch is on and Port A is connected to Port B. When \overline{OE} is HIGH, the switch is open and a high-impedance state exists between the two ports. Reduced voltage drive to the gate of the FET switch permits nominal level shifting of 5V to 3.3V through the switch.

Features

- Space saving SOT23 or SC70 5-lead package
- Ultra small MicroPak™ Pb-Free leadless package
- \blacksquare 5 Ω switch connection between two ports
- Designed to be used in level-shifting applications
- Minimal propagation delay through the switch
- Low I_{CC}
- Zero bounce in flow-through mode
- Control inputs compatible with TTL level


Ordering Code:

Order	Package	Product Code	Package Description	Supplied As
Number	Number	Top Mark	Fackage Description	Supplied As
NC7SZD384M5X	MA05B	8Z4D	5-Lead SOT23, JEDEC MO-178, 1.6mm	3k Units on Tape and Reel
NC7SZD384P5X	MAA05A	Z4D	5-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3k Units on Tape and Reel
NC7SZD384L6X	MAC06A	A4	Pb-Free 6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel

Pb-Free package per JEDEC J-STD-020B.

 $\label{eq:microPak} \mbox{MicroPak}^{\tiny{\text{TM}}} \mbox{ is a trademark of Fairchild Semiconductor Corporation.}$

Logic Symbol



Pin Descriptions


Pin Name	Description
OE	Bus Switch Enable
Α	Bus A
В	Bus B
NC	No Connect

Function Table


OE	B _O	Function
L	A _O	Connect
Н	HIGH-Z State	Disconnect

Connection Diagrams

Pin Assignments for SC70 and SOT23



Pad Assignments for MicroPak



(Top Through View)

Absolute Maximum Ratings(Note 1)

Supply Voltage (V _{CC})	-0.5V to $+7.0V$
DC Switch Voltage (VS)	-0.5V to $+7.0V$
DC Input Voltage (V _{IN}) (Note 2)	-0.5V to $+7.0V$
DC Input Diode Current (I_{IK}) $V_{IN} < 0V$	-50 mA
DC Output (I _{OUT}) Sink Current	128 mA
DC V _{CC} /GND Current (I _{CC} /GND)	±100 mA
Storage Temperature Range (T _{STG})	-65°C to +150°C
Junction Temperature under bias (T _J)	+150°C
Junction Lead Temperature (T _L)	
(Soldering, 10 seconds)	+260°C
Power Dissipation (P _D) @ +85°C	
SOT23-5	200 mW
SC70-5	150 mW

Recommended Operating Conditions (Note 3)

Power Supply Operating (V _{CC})	4.5V to 5.5V
Input Voltage (V _{IN})	0V to 5.5V
Output Voltage (V _{OUT})	0V to 5.5V
Input Rise and Fall Time (t _r , t _f)	
Switch Control Input	0 ns/V to 5 ns
Switch I/O	0 ns/V to DC
Operating Temperature (T _A)	-40°C to +85°C
Thermal Resistance (θ_{JA})	
SOT23-5	300°C/Watt
SC70-5	425°C/Watt

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

		V _{cc}	T	_A = -40°C to +85	°C		Conditions	
Symbol	Parameter	(V)	Min	Typ (Note 4)	Max	Units		
V _{IK}	Maximum Clamp Diode Voltage	4.5			-1.2	-V	I _{IN} = -18 mA	
V _{IH}	HIGH Level Input Voltage	4.5-5.5	2.0			V		
V_{IL}	LOW Level Input Voltage	4.5-5.5			8.0	V		
V _{OH}	HIGH Level Output Voltage	4.5-5.5		See Figure 3		V	$V_{IN} = V_{CC}$	
կ	Input Leakage Current	0-5.5			±1.0	μА	$0 \le V_{IN} \le 5.5V$	
I _{OFF}	"OFF" Leakage Current	5.5			±10.0	μА	$0 \le A, B, \le V_{CC}$	
R _{ON}	Switch On Resistance (Note 5)	4.5		5.0	7.0	Ω	V _{IN} = 0V, I _I = 64 mA	
				5.0	7.0	Ω	$V_{IN} = 0V$, $I_I = 30 \text{ mA}$	
				35.0	50.0	Ω	V _{IN} = 2.4V, I _I = 15 mA	
I _{CC}	Quiescent Supply Current						$V_{IN} = V_{CC}$ or GND, $I_O = 0$	
	Switch On	5.5		0.8	1.5	mA	OE = GND	
	Switch Off	5.5			10.0	μΑ	OE = V _{CC}	
Δl _{CC}	Increase in I _{CC} per Input (Note 6)	5.5		0.8	2.5	mA	OE = 3.4V, I _O = 0,	
							Control Input only.	

Note 4: All typical values are at $V_{CC}=5.0V,\,T_{A}\!\!=25^{\circ}C.$

Note 5: Measured by the voltage drop between A and B pins at the indicated current through the switch. On Resistance is determined by the lower of the voltages on the two (A or B) pins.

Note 6: Per TTL driven input ($V_{IN} = 3.4V$, control input only). A and B pins do not contribute to $I_{CC.}$

AC Electrical Characteristics

Sumbal	Davamatan	v _{cc}	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ $C_1 = 50 \text{ pF, RU} = \text{RD} = 500\Omega$			Units	Conditions	Figure
Symbol	Parameter	(V)	Min	Min Typ Max		Units	Conditions	Figure Number
t _{PHL} ,	Propagation Delay Bus-to-Bus (Note 8)	4.5–5.5		(Note 7)	0.25	ns	V _I = OPEN	Figures 1, 2
t _{PZL} , t _{PZH}	Output Enable Time	4.5–5.5	1.5		7.5	ns	$V_I = 7V$ for t_{PZL} $V_I = OPEN$ for t_{PZH}	Figures 1, 2
t _{PLZ} , t _{PHZ}	Output Disable Time	4.5–5.5	1.0		6.0		$V_I = 7V$ for t_{PLZ} $V_I = OPEN$ for t_{PHZ}	Figures 1, 2

Note 7: All typical values are $V_{CC}=5.0V,\,T_A=25\,^{\circ}C.$

Note 8: This parameter is guaranteed by design but is not tested. The bus switch contributes no propagation delay other than the RC delay of the typical On Resistance of the switch and the 50 pF load capacitance, when driven by an ideal voltage source (zero output impedance).

Capacitance (Note 9)

Symbol	Parameter	Тур	Max	Units	Conditions
C _{IN}	Control Pin Input Capacitance	2	5	pF	V _{CC} = 5.0V
C _{I/O}	Input/Output Capacitance	4.5	10	pF	V _{CC} = 5.0V

Note 9: $T_A = 25^{\circ}C$ f = 1MHz

AC Loading and Waveforms




FIGURE 1. AC Test Circuit

Note: Input driven by 50Ω source terminated in 50Ω .

C_L includes load and stray capacitance.

Input PRR = $1.0 \text{ MHz } t_w = 500 \text{ ns.}$

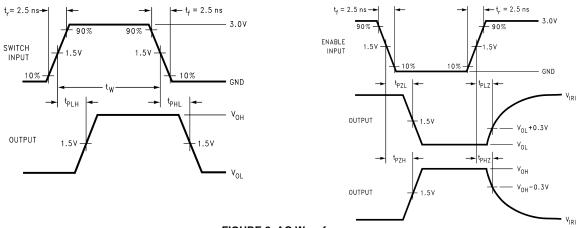




FIGURE 2. AC Waveforms

DC Characteristics









FIGURE 3. Typical High Level Output Voltage vs. Supply Voltage


Tape and Reel Specification


TAPE FORMAT for SC70 and SOT23

Package	Tape	Number	Cavity	Cover Tape
Designator	Section	Cavities	Status	Status
	Leader (Start End)	125 (typ)	Empty	Sealed
M5X, P5X	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

TAPE DIMENSIONS inches (millimeters)

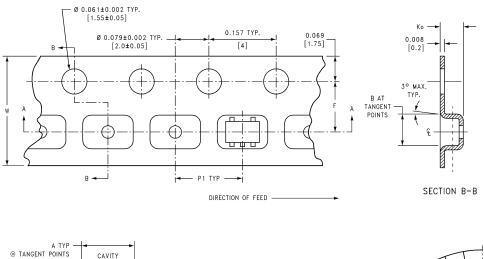






BEND RADIUS NOT TO SCALE


Package	Tape Size	DIM A	DIM B	DIM F	DIM K _o	DIM P1	DIM W
SC70-5	9 mm	0.093	0.096	0.138 ± 0.004	0.053 ± 0.004	0.157	0.315 ± 0.004
SC70-5	8 mm	(2.35)	(2.45)	(3.5 ± 0.10)	(1.35 ± 0.10)	(4)	(8 ± 0.1)
COT22 F 0		0.130	0.130	0.138 ± 0.002	0.055 ± 0.004	0.157	0.315 ± 0.012
SOT23-5	8 mm	(3.3)	(3.3)	(3.5 ± 0.05)	(1.4 ± 0.11)	(4)	(8 ± 0.3)

TAPE FORMAT for MicroPak

Package	Tape	Number	Cavity	Cover Tape
Designator	Section	Cavities	Status	Status
	Leader (Start End)	125 (typ)	Empty	Sealed
L6X	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

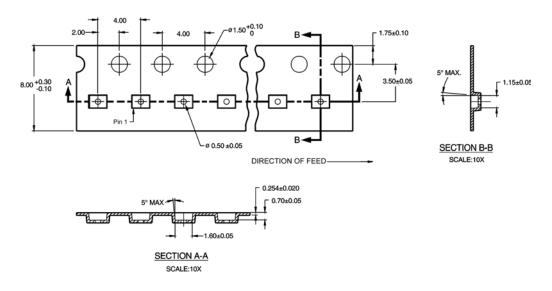


REEL DIMENSIONS inches (millimeters)

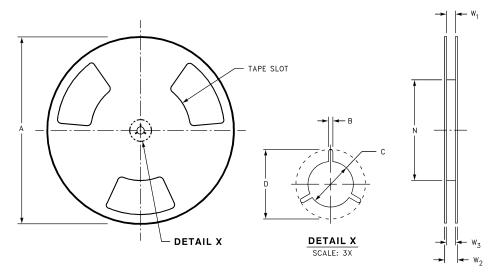


Tape Size	Α	В	С	D	N	W1	W2	W3
0 mm	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.039
8 mm	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.00)

Physical Dimensions inches (millimeters) unless otherwise noted

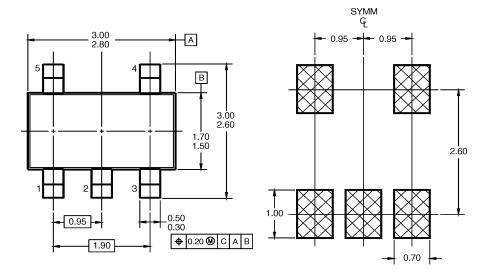


LAND PATTERN RECOMMENDATION

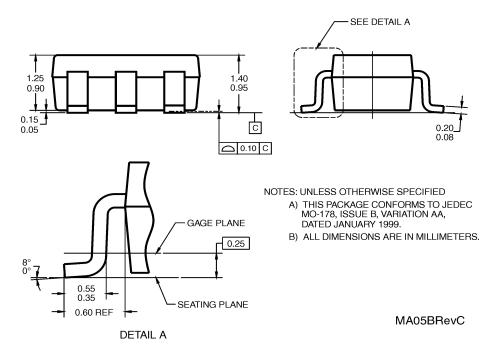

5-Lead SOT23, JEDEC MO-178, 1.6mm Package Number MA05B

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

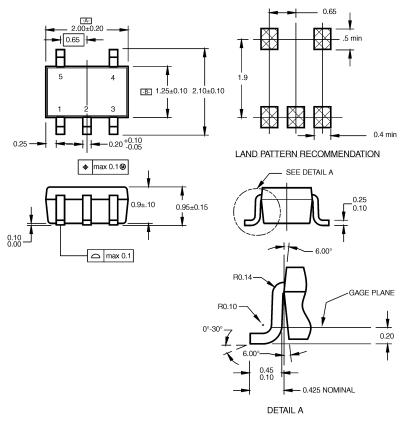

NOTES:


- A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88A.
- $\ensuremath{\mathsf{B}}.$ DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.

C. DIMENSIONS ARE IN MILLIMETERS.

MAA05ARevC

5-Lead SC70, EIAJ SC-88a, 1.25mm Wide Package Number MAA05A

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

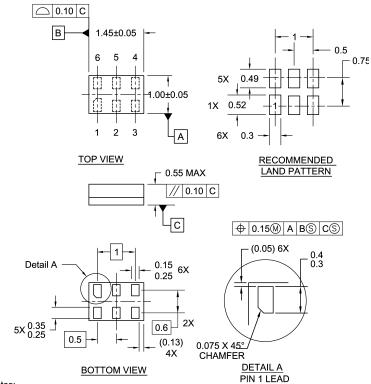

Notes:

- 1. JEDEC PACKAGE REGISTRATION IS ANTICIPATED 2. DIMENSIONS ARE IN MILLIMETERS 3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06ARevB

Pb-Free 6-Lead MicroPak, 1.0mm Wide Package Number MAC06A

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use

provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.