# Single Non-Inverting Buffer with Schmitt Trigger

The NL17SZ17 is a single Non-inverting Schmitt Trigger Buffer in two tiny footprint packages. The device performs much as LCX multi-gate products in speed and drive.

## Features

- Tiny SOT-353 and SOT-553 Packages
- Source/Sink 24 mA at 3.0 Volts
- Overvoltage Tolerant Inputs and Outputs
- Chip Complexity: FETs = 20
- Designed for 1.65 V to 5.5 V V<sub>CC</sub> Operation
- These Devices are Pb-Free and are RoHS Compliant
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable




Figure 1. Pinout (Top View)




Figure 2. Logic Symbol



# **ON Semiconductor®**

http://onsemi.com

#### MARKING DIAGRAMS



= Pb–Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

#### **PIN ASSIGNMENT**

Pin	Function
1	NC
2	А
3	GND
4	Y
5	V <sub>CC</sub>

#### **FUNCTION TABLE**

Y Output
L
Н

## **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 4 of this data sheet.

#### **MAXIMUM RATINGS**

Symbol	Par	ameter	Value	Units
V <sub>CC</sub>	DC Supply Voltage		-0.5 to +7.0	V
VI	DC Input Voltage		$-0.5 \leq V_{l} \leq +7.0$	V
Vo	DC Output Voltage	Output in High or LOW State (Note 1)	$-0.5 \leq V_O \leq +7.0$	V
I <sub>IK</sub>	DC Input Diode Current	V <sub>I</sub> < GND	-50	mA
I <sub>OK</sub>	DC Output Diode Current	V <sub>O</sub> < GND	-50	mA
Ι <sub>Ο</sub>	DC Output Sink Current	±50	mA	
I <sub>CC</sub>	DC Supply Current per Supply Pin	±100	mA	
I <sub>GND</sub>	DC Ground Current per Ground Pin	±100	mA	
T <sub>STG</sub>	Storage Temperature Range		-65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for	10 Seconds	260	°C
TJ	Junction Temperature under Bias		+150	°C
$\theta_{JA}$	Thermal Resistance	SOT-353 (Note 2) SOT-553	350 496	°C/W
PD	Power Dissipation in Still Air at 85°C	SOT-353 SOT-553	186 135	mW
MSL	Moisture Sensitivity		Level 1	
F <sub>R</sub>	Flammability Rating	Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	
ESD	ESD Classification	Human Body Model (Note 3) Machine Model (Note 4) Charged Device Model	Class 2 Class C N/A	
I <sub>Latchup</sub>	Latchup Performance A	Above V <sub>CC</sub> and Below GND at 85°C (Note 5)	±500	mA

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. I<sub>O</sub> absolute maximum rating must be observed.

Beasured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2-ounce copper trace with no air flow.
 Tested to EIA/JESD22-A114-A, rated to EIA/JESD22-A114-B.
 Tested to EIA/JESD22-A115-A, rated to EIA/JESD22-A115-A.

5. Tested to EIA/JESD78.

## **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Units	
V <sub>CC</sub>	Supply Voltage	Operating Data Retention Only	1.65 1.5	5.5 5.5	V
VI	Input Voltage, (Note 6)		0	5.5	V
Vo	Output Voltage	(HIGH or LOW State)	0	5.5	V
T <sub>A</sub>	Operating Free-Air Temperature		-55	+125	°C
$\Delta t / \Delta V$	Input Transition Rise or Fall Rate	$ \begin{array}{c} V_{CC} = 2.5 \ V \pm 0.2 \ V \\ V_{CC} = 3.0 \ V \pm 0.3 \ V \\ V_{CC} = 5.0 \ V \pm 0.5 \ V \end{array} $	0 0 0	No Limit No Limit No Limit	ns/V

6. Unused inputs may not be left open. All inputs must be tied to a high-logic voltage level or a low-logic input voltage level.

#### DC ELECTRICAL CHARACTERISTICS

			V <sub>CC</sub>	T <sub>A</sub> =	= 25°C		–55°C ≤ T <sub>A</sub> ≤	≤ 125°C	
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Units
V <sub>T</sub> +	Positive Input Threshold Voltage		1.65 2.3 2.7 3.0 4.5 5.5	0.6 1.0 1.2 1.3 1.9 2.2	1.0 1.5 1.7 1.9 2.7 3.3	1.4 1.8 2.0 2.2 3.1 3.6	0.6 1.0 1.2 1.3 1.9 2.2	1.4 1.8 2.0 2.2 3.1 3.6	V
V <sub>T</sub> -	Negative Input Threshold Voltage		1.65 2.3 2.7 3.0 4.5 5.5	0.2 0.4 0.5 0.6 1.0 1.2	0.5 0.75 0.87 1.0 1.5 1.9	0.8 1.15 1.4 1.5 2.0 2.3	0.2 0.4 0.5 0.6 1.0 1.2	0.8 1.15 1.4 1.5 2.0 2.3	V
V <sub>H</sub>	Input Hysteresis Voltage		1.65 2.3 2.7 3.0 4.5 5.5	0.1 0.25 0.3 0.4 0.6 0.7	0.48 0.75 0.83 0.93 1.2 1.4	0.9 1.1 1.15 1.2 1.5 1.7	0.1 0.25 0.3 0.4 0.6 0.7	0.9 1.1 1.15 1.2 1.5 1.7	V
V <sub>OH</sub>	High-Level Output Voltage $V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OH} = -100 \mu A$ $I_{OH} = -3 m A$ $I_{OH} = -8 m A$ $I_{OH} = -12 m A$ $I_{OH} = -16 m A$ $I_{OH} = -24 m A$ $I_{OH} = -32 m A$	1.65 to 5.5 1.65 2.3 2.7 3.0 3.0 4.5	$\begin{array}{c} V_{CC} & -0.1 \\ 1.29 \\ 1.9 \\ 2.2 \\ 2.4 \\ 2.3 \\ 3.8 \end{array}$	V <sub>CC</sub> 1.52 2.1 2.4 2.7 2.5 4.0		V <sub>CC</sub> -0.1 1.29 1.9 2.2 2.4 2.3 3.8		V
V <sub>OL</sub>	Low-Level Output Voltage $V_{IN} = V_{IH}$ or $V_{IL}$	$I_{OL} = 100 \ \mu A$ $I_{OL} = 4 \ m A$ $I_{OL} = 8 \ m A$ $I_{OL} = 12 \ m A$ $I_{OL} = 16 \ m A$ $I_{OL} = 24 \ m A$ $I_{OL} = 32 \ m A$	1.65 to 5.5 1.65 2.3 2.7 3.0 3.0 4.5		0.08 0.2 0.22 0.28 0.38 0.42	0.1 0.24 0.3 0.4 0.4 0.55 0.55		0.1 0.24 0.3 0.4 0.4 0.55 0.55	V
I <sub>IN</sub>	Input Leakage Current	$V_{IN} = 5.5 \text{ V or GND}$	0 to 5.5			±0.1		±1.0	μΑ
I <sub>OFF</sub>	Power Off Leakage Current	$V_{IN} = 5.5 \text{ V or}$ $V_{OUT} = 5.5 \text{ V}$	0			1.0		10	μΑ
I <sub>CC</sub>	Quiescent Supply Current	$V_{IN} = 5.5 \text{ V or GND}$	5.5			1.0		10	μA


#### AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0 \text{ ns}$ )

			$V_{CC} \qquad T_{A} = 25^{\circ}C \qquad -55^{\circ}C \le T_{A} \le 125^{\circ}C$		T <sub>A</sub> = 25°C		<sub>A</sub> ≤ 125°C		
Symbol	Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Units
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay Input A to Y (Figures 3 and 4)	$R_L = 1 M\Omega$ , $C_L = 15 pF$	$1.65 \\ 1.8 \\ 2.5 \pm 0.2 \\ 3.3 \pm 0.3 \\ 5.0 \pm 0.5$	2.0 2.0 1.0 1.0 0.5	9.1 7.6 5.0 3.7 3.1	15 12.5 9.0 6.3 5.2	2.0 2.0 1.0 1.0 0.5	15.6 13 9.5 6.5 5.5	ns
		$R_L$ = 500 Ω, $C_L$ = 50 pF	$\begin{array}{c} 3.3\pm0.3\\ 5.0\pm0.5\end{array}$	1.5 0.8	4.4 3.7	7.2 5.9	1.5 0.8	7.5 6.2	

#### **CAPACITIVE CHARACTERISTICS**


Symbol	Parameter	Parameter Condition			
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = 5.5 V, $V_{I}$ = 0 V or $V_{CC}$	>2.5	pF	
C <sub>PD</sub>	Power Dissipation Capacitance (Note 7)	10 MHz, $V_{CC}$ = 3.3 V, $V_{I}$ = 0 V or $V_{CC}$ 10 MHz, $V_{CC}$ = 5.5 V, $V_{I}$ = 0 V or $V_{CC}$	9 11	pF	

7.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no–load dynamic power consumption;  $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$ .

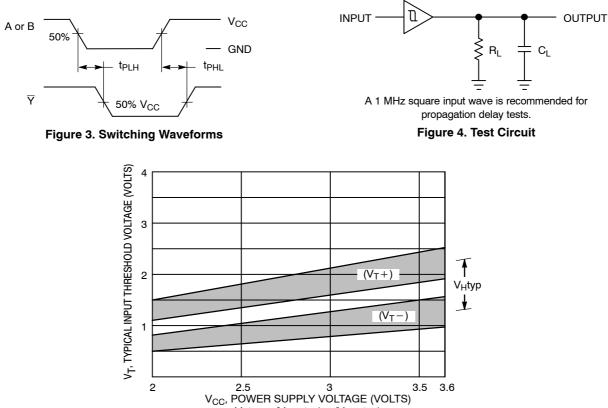


 $V_H typ = (V_T + typ) - (V_T - typ)$ 

Figure 5. Typical Input Threshold,  $V_T+$ ,  $V_T-$  versus Power Supply Voltage

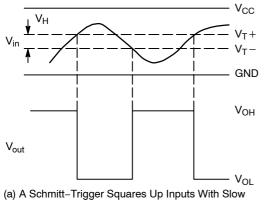



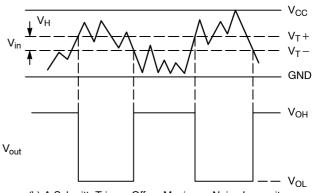

(b) A Schmitt-Trigger Offers Maximum Noise Immunity

Figure 6. Typical Schmitt-Trigger Applications

DEVICE	ORDERING INFORMATION

Device Order Number	Package Type	Tape/Reel Size <sup>†</sup>
NL17SZ17DFT2G	SC-88A/SC-70-5/SOT-353 (Pb-Free)	3000 Units / Tape & Reel
NLV17SZ17DFT2G*	SC-88A/SC-70-5/SOT-353 (Pb-Free)	3000 Units / Tape & Reel
NL17SZ17XV5T2G	SOT-553 (Pb-Free)	4000 Units / Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.


## NL17SZ17

## **PACKAGE DIMENSIONS**

SC-88A (SC-70-5/SOT-353) DF SUFFIX CASE 419A-02 ISSUE K

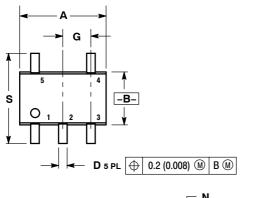






- NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. 419A-01 OBSOLETE. NEW STANDARD 419A-02. 4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	INC	HES	MILLIN	IETERS	
DIM	MIN	MAX	MIN	MAX	
Α	0.071	0.087	1.80	2.20	
В	0.045	0.053	1.15	1.35	
С	0.031 0.04		0.80	1.10	
D	0.004	0.012	0.10	0.30	
G	0.026	BSC	0.65 BSC		
Н		0.004		0.10	
J	0.004	0.010	0.10	0.25	
Κ	0.004 0.012		0.10	0.30	
Ν	0.008	REF	0.20	REF	
S	0.079	0.087	2.00	2.20	

#### NL17SZ17

#### PACKAGE DIMENSIONS

SOT-553 XV5 SUFFIX CASE 463B ISSUE B

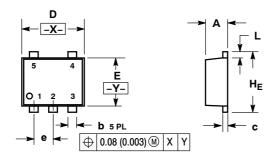


NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

 Dimensional And Pole Indentified Terrary ANSI Y14.5M, 1982.
 CONTROLLING DIMENSION: MILLIMETERS
 MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS

OF BASE MATERIAL

	MILLIMETERS			MILLIMETERS INCH			INCHES	
DIM	MIN	NOM	MAX	MIN	NOM	MAX		
Α	0.50	0.55	0.60	0.020	0.022	0.024		
b	0.17	0.22	0.27	0.007	0.009	0.011		
С	0.08	0.13	0.18	0.003	0.005	0.007		
D	1.50	1.60	1.70	0.059	0.063	0.067		
E	1.10	1.20	1.30	0.043	0.047	0.051		
е		0.50 BSC		0.020 BSC				
L	0.10	0.20	0.30	0.004	0.008	0.012		
HE	1.50	1.60	1.70	0.059	0.063	0.067		

#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and use registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death agsociated with such unintended or unauthorized use patent solut. Cwas negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunit//Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050

#### ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative