# **Triple Inverter**

The NL37WZ04 is a high performance triple inverter operating from a 1.65 V to 5.5 V supply. High impedance TTL compatible inputs significantly reduce current loading to input drivers while TTL compatible outputs offer improved switching noise performance.

# Features

- Extremely High Speed:  $t_{PD}$  2.0 ns (typical) at  $V_{CC}$  = 5 V
- Designed for 1.65 V to 5.5 V  $V_{CC}$  Operation
- Over Voltage Tolerant Inputs and Outputs
- LVTTL Compatible Interface Capability With 5 V TTL Logic with  $V_{CC}$  = 3 V
- LVCMOS Compatible
- 24 mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- Chip Complexity: FET = 72
- These Devices are Pb-Free and are RoHS Compliant





Figure 1. Pinout (Top View)








# **ON Semiconductor®**

http://onsemi.com



L5 = Device Code M = Date Code\* = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

PIN ASSIGNMENT				
Pin	Function			
1	IN A1			
2	OUT <u>Y3</u>			
3	IN A2			
4	GND			
5	OUT Y2			
6	IN A3			
7	OUT <u>Y1</u>			
8	V <sub>CC</sub>			

#### **FUNCTION TABLE**

A Input	<b> Y</b> Output
L	Н
Н	L

# **ORDERING INFORMATION**

Dev	vice	Package	Shipping <sup>†</sup>
NL37WZ	Z04USG	US8 (Pb-Free)	3000/Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## MAXIMUM RATINGS

Symbol	Parameter	Value	Units
V <sub>CC</sub>	DC Supply Voltage	-0.5 to +7.0	V
VI	DC Input Voltage	-0.5 to +7.0	V
Vo	DC Output Voltage	-0.5 to +7.0	V
Ι <sub>ΙΚ</sub>	DC Input Diode Current V <sub>I</sub> < GND	-50	mA
Ι <sub>ΟΚ</sub>	DC Output Diode Current $V_0 < GND$	-50	mA
Ι <sub>Ο</sub>	DC Output Sink Current	±50	mA
I <sub>CC</sub>	DC Supply Current per Supply Pin	±100	mA
I <sub>GND</sub>	DC Ground Current per Ground Pin	±100	mA
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C
ΤL	Lead Temperature, 1 mm from Case for 10 Seconds	260	°C
Τ <sub>J</sub>	Junction Temperature under Bias	+150	°C
$\theta_{JA}$	Thermal Resistance (Note 1)	250	°C/W
PD	Power Dissipation in Still Air at 85°C	250	mW
MSL	Moisture Sensitivity	Level 1	
F <sub>R</sub>	Flammability Rating Oxygen Index: 28 to 34	UL 94 V-0 @ 0.125 in	
V <sub>ESD</sub>	ESD Withstand Voltage Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4)	> 2000 > 200 N/A	V

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2-ounce copper trace with no air flow.
 Tested to EIA/JESD22-A114-A.

3. Tested to EIA/JESD22-A115-A.

4. Tested to JESD22-C101-A.

# **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min	Max	Units
V <sub>CC</sub>	Supply Voltage Operating Data Retention Only	1.65 1.5	5.5 5.5	V
VI	Input Voltage (Note 5)	0	5.5	V
Vo	Output Voltage (HIGH or LOW State)		5.5	V
T <sub>A</sub>	Operating Free-Air Temperature		+85	°C
Δt/ΔV	Input Transition Rise or Fall Rate $V_{CC} = 2.5 V \pm 0.2 V$ $V_{CC} = 3.0 V \pm 0.3 V$ $V_{CC} = 5.0 V \pm 0.5 V$	0 0 0	20 10 5	ns/V

5. Unused inputs may not be left open. All inputs must be tied to a high- or low-logic input voltage level.

## DC ELECTRICAL CHARACTERISTICS

	Parameter	Condition	V <sub>CC</sub> (V)	T <sub>A</sub> = 25°C			–40°C ≤ T <sub>A</sub> ≤ 85°C		
Symbol				Min	Тур	Max	Min	Max	Units
VIH	High-Level Input		1.65	0.75 V <sub>CC</sub>			0.75 V <sub>CC</sub>		V
	Voltage		2.3 to 5.5	0.7 V <sub>CC</sub>			0.7 V <sub>CC</sub>		
V <sub>IL</sub>	Low-Level Input		1.65			0.25 V <sub>CC</sub>		0.25 V <sub>CC</sub>	V
	Voltage		2.3 to 5.5			0.3 V <sub>CC</sub>		0.3 V <sub>CC</sub>	
V <sub>OH</sub>	High-Level Output	I <sub>OH</sub> = -100 μA	1.65 to 5.5	V <sub>CC</sub> -0.1	V <sub>CC</sub>		V <sub>CC</sub> -0.1		V
	Voltage V <sub>IN</sub> = V <sub>IL</sub>	I <sub>OH</sub> = -3 mA	1.65	1.29	1.52		1.29		
		I <sub>OH</sub> = -8 mA	2.3	1.9	2.1		1.9		
		I <sub>OH</sub> = -12 mA	2.7	2.2	2.4		2.2		-
		I <sub>OH</sub> = -16 mA	3.0	2.4	2.7		2.4		
		I <sub>OH</sub> = -24 mA	3.0	2.3	2.5		2.3		
		I <sub>OH</sub> = -32 mA	4.5	3.8	4.0		3.8		
V <sub>OL</sub>	Low-Level Output Voltage V <sub>IN</sub> = V <sub>IH</sub>	I <sub>OL</sub> = 100 μA	1.65 to 5.5			0.1		0.1	V
		I <sub>OL</sub> = 3 mA	1.65		0.08	0.24		0.24	
		I <sub>OL</sub> = 8 mA	2.3		0.20	0.3		0.3	
		I <sub>OL</sub> = 12 mA	2.7		0.22	0.4		0.4	
		I <sub>OL</sub> = 16 mA	3.0		0.28	0.4		0.4	
		I <sub>OL</sub> = 24 mA	3.0		0.38	0.55		0.55	
		I <sub>OL</sub> = 32 mA	4.5		0.42	0.55		0.55	
I <sub>IN</sub>	Input Leakage Cur- rent	V <sub>IN</sub> = 5.5 V or GND	0 to 5.5			±0.1		±1.0	μΑ
I <sub>OFF</sub>	Power Off Leakage Current	V <sub>IN</sub> = 5.5 V or V <sub>OUT</sub> = 5.5 V	0			1		10	μA
I <sub>CC</sub>	Quiescent Supply Current	V <sub>IN</sub> = 5.5 V or GND	5.5			1		10	μA

### AC ELECTRICAL CHARACTERISTICS $t_R$ = $t_F$ = 2.5 ns; $C_L$ = 50 pF; $R_L$ = 500 $\Omega$


			V <sub>cc</sub>	T <sub>A</sub> = 25°C		–40°C ≤ T <sub>A</sub> ≤ 85°C			
Symbol	Parameter	Condition	(Ň)	Min	Тур	Max	Min	Max	Units
t <sub>PLH</sub>		$R_L = 1 M\Omega$ , $C_L = 15 pF$	$1.8\pm0.15$	1.8	4.4	9.5	2.0	10	ns
t <sub>PHL</sub>	(Figure 3 and 4)	$R_L = 1 M\Omega$ , $C_L = 15 pF$	$2.5\pm0.2$	1.2	5.0	5.7	1.2	6.1	
		$R_L$ = 1 MΩ, $C_L$ = 15 pF $R_L$ = 500 Ω, $C_L$ = 50 pF	$\textbf{3.3}\pm\textbf{0.3}$	0.8 1.2	2.2 3.9	3.4 4.5	0.8 1.2	3.8 5.0	
		$ \begin{array}{l} R_{L} = 1 \ M\Omega, \ C_{L} = 15 \ pF \\ R_{L} = 500 \ \Omega, \ C_{L} = 50 \ pF \end{array} $	$5.0\pm0.5$	0.5 0.8	1.8 2.3	2.8 3.6	0.5 0.8	3.1 4.0	


# **CAPACITIVE CHARACTERISTICS**

Symbol	Parameter	Parameter Condition		Units
C <sub>IN</sub>	Input Capacitance	$V_{CC}$ = 5.5 V, $V_{I}$ = 0 V or $V_{CC}$	2.5	pF
C <sub>PD</sub>	Power Dissipation Capacitance (Note 6)	10 MHz, $V_{CC}$ = 3.3 V, $V_I$ = 0 V or $V_{CC}$ 10 MHz, $V_{CC}$ = 5.5 V, $V_I$ = 0 V or $V_{CC}$	9 11	pF

6.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:  $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$ .  $C_{PD}$  is used to determine the no-load dynamic power consumption;  $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$ .

# NL37WZ04





A 1–MHz square input wave is recommended for propagation delay tests.

Figure 3. Switching Waveform





#### NL37WZ04

#### PACKAGE DIMENSIONS

US8 CASE 493-02

-Xв  $\mathbf{C}$ G Р



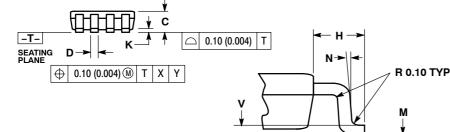

4

DETAIL E


NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  CONTROLLING DIMENSION: MILLIMETERS.
  DIMENSION "A" DOES NOT INCLUDE MOLD FLASH, PROTRUSION OR GATE BURR. MOLD FLASH. PROTRUSION AND GATE DUDD DUALL NOT EXCEPT ON AND GATE
- BURR SHALL NOT EXCEED 0.140 MM (0.0055") PER SIDE.
- IMENSION "B" DOES NOT INCLUDE INTER-LEAD FLASH OR PROTRUSION. INTER-LEAD FLASH AND PROTRUSION 4. SHALL NOT E3XCEED 0.140 (0.0055") PER SIDE
- LEAD FINISH IS SOLDER PLATING WITH 5. THICKNESS OF 0.0076-0.0203 MM.
- (300-800 °). ALL TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.0508 (0.0002 °). 6.

	MILLIN	IETERS	INC	HES	
DIM	MIN	MAX	MIN	MAX	
Α	1.90	2.10	0.075	0.083	
В	2.20	2.40	0.087	0.094	
С	0.60	0.90	0.024	0.035	
D	0.17	0.25	0.007	0.010	
F	0.20	0.35	0.008	0.014	
G	0.50	BSC	0.020	BSC	
н	0.40	REF	0.016 REF		
J	0.10	0.18	0.004	0.007	
ĸ	0.00	0.10	0.000	0.004	
L	3.00	3.20	0.118	0.126	
M	0 °	6 °	0 °	6 °	
N	5 °	10 °	5 °	10 °	
P	0.23	0.34	0.010	0.013	
R	0.23	0.33	0.009	0.013	
S	0.37	0.47	0.015	0.019	
U	0.60	0.80	0.024	0.031	
V	0.12	BSC	0.005 BSC		

#### SOLDERING FOOTPRINT\*

F



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and 💷 are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILIC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILIC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILIC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILIC obsent or any liability nor the rights of others. SCILIC products are not designed, intended, or authorized for use a components in systems intended for surgical implant into the body, or other applications are specified to the SCILIC of the S intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support:

#### Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050

#### ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

NL37WZ04/D