Ultra-Small SPST Analog Switch

The NL7WB66 is a very low RON dual SPST analog switch. RON is 5.0Ω (Typ) at 5.0 V. The device is offered in the very popular low cost US8 package. It is designed as a general purpose dual switch and can be used to switch either analog signals such as audio and video or digital signal such as TTL, CMOS, LVDS, ECL, or complex digital signals such as QPSK.

Features

- Excellent Performance RDS_{ON} = 5.0Ω at 5.0 V
- High Speed Operation: $t_{PD} = 0.25$ ns (Max) at 5.0 V
- 1.65 to 5.5 V Operating Range
- Reduced Threshold Voltages for LVTTL on Control Pin
 - Eliminates the Need for Translators for Many Applications
 - ◆ TTL Compatibility when V_{CC} is 5.0 V
 - ◆ Can Operate with 1.8 V Inputs, if V_{CC} is 3.0
 - Also Meets Full CMOS Specifications
- Ultra-Low Charge Injection = 7.5 pC at 5.0 V
- Low Stand-by Power $I_{CC} = 1.0 \text{ nA}$ (Max) at $T_A = 25^{\circ}\text{C}$
- Control Pins IN1, IN2, are Overvoltage Tolerant
- Pin for Pin Replacement TC7WB66, NC7WB66, 74LVC2G66
- ESD Protection:

Machine Model >200 V, Human Body Model >2000 V

- Latchup Max Rating: 200 mA
- This is a Pb-Free Device

Typical Applications

- Cell Phones
- PDAs
- Digital Still Cameras
- Video
- Digital Video





Figure 1. Pin Assignment Diagram

1



ON Semiconductor®

http://onsemi.com



= Device Code ΑJ Μ = Date Code* = Pb-Free Package

(Note: Microdot may be in either location)

PIN ASSIGNMENT

| Pin | Function | OVT |
|-----|-----------------|-----|
| 1 | NO1 | - |
| 2 | COM1 | - |
| 3 | OE2 | Yes |
| 4 | GND | - |
| 5 | NO2 | _ |
| 6 | COM2 | - |
| 7 | OE1 | Yes |
| 8 | V _{CC} | _ |

FUNCTION TABLE

| On/Off Enable Input | State of Analog Switch |
|------------------------|---------------------------|
| L | Off |
| Н | On |

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

^{*}Date Code orientation may vary depending upon manufacturing location.

MAXIMUM RATINGS

| Symbol | Rating | Value | Unit |
|------------------|---|------------------------|------|
| V _{CC} | DC Supply Voltage | -0.5 to +7.0 | V |
| VI | DC Input Voltage | -0.5 to +7.0 | V |
| Vo | DC Output Voltage | -0.5 to +7.0 | V |
| I _{IK} | DC Input Diode Current V _I < GND | -50 | mA |
| I _{OK} | DC Output Diode Current V _O < GND | -50 | mA |
| Io | DC Output Sink Current | ±50 | mA |
| I _{CC} | DC Supply Current per Supply Pin | ± 100 | mA |
| I _{GND} | DC Ground Current per Ground Pin | ± 100 | mA |
| T _{STG} | Storage Temperature Range | -65 to +150 | °C |
| TL | Lead Temperature, 1 mm from Case for 10 Seconds | 260 | °C |
| TJ | Junction Temperature under Bias | + 150 | °C |
| θ_{JA} | Thermal Resistance | 250 | °C/W |
| P_{D} | Power Dissipation in Still Air at 85°C | 250 | mW |
| MSL | Moisture Sensitivity | Level 1 | - |
| F _R | Flammability Rating Oxygen Index: 28 to 34 | UL 94 V-0 @ 0.125 in | - |
| V _{ESD} | ESD Withstand Voltage Human Body Model (Note 2) Machine Model (Note 3) Charged Device Model (Note 4) | > 2000 > 200 N/A | V |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2-ounce copper trace with no air flow.

2. Tested to EIA/JESD22-A114-A.

- 3. Tested to EIA/JESD22-A115-A.
- 4. Tested to JESD22-C101-A.

RECOMMENDED OPERATING CONDITIONS

| Symbol | Characteristics | Min | Max | Unit |
|---------------------------------|--|----------------|-----------------|------|
| V _{CC} | Positive DC Supply Voltage | 1.65 | 5.5 | V |
| V _{IN} | Digital Input Voltage (Enable) | GND | 5.5 | V |
| V _{IO} | Static or Dynamic Voltage Across an Off Switch | GND | V _{CC} | V |
| V _{IS} | Analog Input Voltage | NO GND OM | V _{CC} | V |
| T _A | Operating Temperature Range, All Package Types | -55 | +125 | °C |
| t _r , t _f | $\begin{array}{c} \text{Input Rise or Fall Time} & \text{$V_{CC} = 3.3 \ V \pm 0$} \\ \text{(Enable Input)} & \text{$V_{CC} = 5.0 \ V \pm 0$} \end{array}$ | 3 V 0 5 V 0 | 100 20 | ns/V |

DEVICE JUNCTION TEMPERATURE VS. TIME TO 0.1% BOND FAILURES

| Junction Temperature °C | Time, Hours | Time, Years |
|----------------------------|-------------|-------------|
| 80 | 1,032,200 | 117.8 |
| 90 | 419,300 | 47.9 |
| 100 | 178,700 | 20.4 |
| 110 | 79,600 | 9.4 |
| 120 | 37,000 | 4.2 |
| 130 | 17,800 | 2.0 |
| 140 | 8,900 | 1.0 |

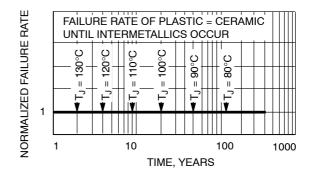


Figure 2. Failure Rate vs. Time Junction Temperature

DC CHARACTERISTICS - Digital Section (Voltages Referenced to GND)

| | | | | Guaranteed Max Limit | | imit | |
|-----------------|--|--------------------------------|--|---|---|---|------|
| Symbol | Parameter | Condition | V _{CC} | 25°C | −40 to 85°C | −55 to <125°C | Unit |
| V _{IH} | High-level Input Voltage, Control Input | | 1.65 to 1.95 2.3 to 2.7 3.0 to 3.6 4.5 to 5.5 | V _{CC} x 0.65 V _{CC} x 0.7 V _{CC} x 0.7 V _{CC} x 0.7 | V _{CC} x 0.65 V _{CC} x 0.7 V _{CC} x 0.7 V _{CC} x 0.7 | V _{CC} x 0.65 V _{CC} x 0.7 V _{CC} x 0.7 V _{CC} x 0.7 | ٧ |
| V _{IL} | Low-level Input Voltage, Control Input | | 1.65 to 1.95 2.3 to 2.7 3.0 to 3.6 4.5 to 5.5 | V _{CC} x 0.35 V _{CC} x 0.3 V _{CC} x 0.3 V _{CC} x 0.3 | V _{CC} x 0.35 V _{CC} x 0.3 V _{CC} x 0.3 V _{CC} x 0.3 | V _{CC} x 0.35 V _{CC} x 0.3 V _{CC} x 0.3 V _{CC} x 0.3 | V |
| I _{IN} | Maximum Input Leakage Current, Enable Inputs | V _{IN} = 5.5 V or GND | 0 V to 5.5 V | <u>+</u> 0.1 | <u>+</u> 1.0 | <u>+</u> 1.0 | μΑ |
| I _{CC} | Maximum Quiescent Supply Current (per package) | Enable and VIS = VCC or GND | 5.5 | 1.0 | 1.0 | 2.0 | μΑ |

DC ELECTRICAL CHARACTERISTICS - Analog Section

| | | | | | | Guaranteed Ma | ax Limit | |
|-----------------------|--|---|--|--|---|---|---|------|
| Symbol | Parameter | Condition | on | V _{CC} | 25°C | -40 to 85°C | -55 to <125°C | Unit |
| R _{ON} | On-State Switch Resistance | $\begin{aligned} &V_{IS} = V_{CC} \\ &V_{IS} = GND \\ &V_{IS} = V_{CC} \\ &V_{IS} = GND \\ &V_{IS} = V_{CC} \\ &V_{IS} = GND \\ &V_{IS} = V_{CC} \\ &V_{IS} = 2.4 \\ &V_{IS} = GND \end{aligned}$ | I _S = 4 mA I _S = 4 mA I _S = 8 mA I _S = 8 mA I _S = 24 mA I _S = 24 mA I _S = 32 mA I _S = 15 mA I _S = 32 mA | 1.65 1.65 2.3 2.3 3.0 3.0 4.5 4.5 | 30 15 20 10 15 7.0 10 8.0 5.0 | 30 15 20 10 15 7.0 10 8.0 5.0 | 30 15 20 10 15 7.0 10 8.0 5.0 | Ω |
| R _{ON(p)} | Peak On-State Resistance | $V_{IS} = V_{CC}$ to GND, $V_{IN} = V_{IH}$ | $I_S = 4 \text{ mA}$ $I_S = 8 \text{ mA}$ $I_S = 24 \text{ mA}$ $I_S = 32 \text{ mA}$ | 1.65 2.3 3.0 4.5 | 120 30 20 15 | 120 30 20 15 | 120 30 20 15 | Ω |
| ΔR _{ON} | Difference of On-State Resistance between Switches | $V_{IS} = V_{CC}$ to GND, $V_{IN} = V_{IH}$ | I _S = 4 mA I _S = 8 mA I _S = 24 mA I _S = 32 mA | 1.65 2.3 3.0 4.5 | 1.2 1.3 1.5 2.0 | 1.2 1.3 1.5 2.0 | 1.2 1.3 1.5 2.0 | Ω |
| R _{FLAT} | | V _{IS} = V _{CC} to GND | I _S = 4 mA I _S = 8 mA I _S = 24 mA I _S = 32 mA | 1.65 2.3 3.0 4.5 | 240 60 14 5.0 | 240 60 14 5.0 | 240 60 14 5.0 | Ω |
| I _{NO(OFF)} | Off Leakage Current | $\begin{aligned} &V_{IN} = V_{IL} \\ &V_{NO} = 1.0 \text{ V}, V_{COM} = 4.5 \text{ V or} \\ &V_{COM} = 1.0 \text{ V and } V_{NO} \text{ 4.5 V} \end{aligned}$ | | 5.5 | 1.0 | 10 | 100 | nA |
| I _{COM(OFF)} | Off Leakage Current | V _{IN} = V _{IL} V _{NO} = 4.5 V or 1.0 V _{COM} = 1.0 V or 4.9 | | 5.5 | 1.0 | 10 | 100 | nA |

AC ELECTRICAL CHARACTERISTICS (Input $t_{\text{r}} = t_{\text{f}} = 3.0 \text{ ns}$)

| | | | Guaranteed Max Limit | | | | | | | | |
|------------------|------------------------|-----------------|------------------------|-----------------|-----------------------|---------------|-----------------------|---------------|-----------------------|---------------|------|
| | | | V _{CC} = ± 0. | : 1.8 V 15 V | V _{CC} = ± 0 | 2.5 V .2 V | V _{CC} = ± 0 | 3.3 V .3 V | V _{CC} = ± 0 | 5.0 V .5 V | |
| Symbol | Parameter | Test Conditions | Min | Max | Min | Max | Min | Max | Min | Max | Unit |
| t _{ON} | Output Enable Time | | 2.3 | 10 | 1.6 | 5.6 | 1.5 | 4.4 | 1.3 | 3.9 | ns |
| t _{OFF} | Output Disable Time | | 2.5 | 10.5 | 1.2 | 6.9 | 2.0 | 7.2 | 1.1 | 6.3 | ns |
| t _{PD} | Propagation Delay Time | | - | 0.55 | - | 0.5 | - | 0.35 | - | 0.25 | ns |

| | | Typical @ 25°C, V _{CC} = 5.0 V | Unit |
|--------------------------------------|---|---|------|
| C _{IN} | Maximum Input Capacitance, Select Input | 3.0 | pF |
| C _{NO1} or C _{NO2} | Analog I/O (Switch Off) | 10 | |
| C _{COM(OFF)} | Common I/O (Switch Off) | 10 | |
| C _{COM(ON)} | Feed-through (Switch Off) | 10 | |

ADDITIONAL APPLICATIONS CHARACTERISTICS (Voltage Reference to GND Unless Noted)


| Symbol | Parameter | Condition | V _{CC} (V) | Typical 25°C | Unit |
|------------------|--|--|---------------------|----------------------|------|
| BW | Maximum On-Channel -3.0 dB Bandwidth or Minimum Frequency Response | V_{IS} = 0 dBm V_{IS} centered between V_{CC} and GND | 2.0 3.0 4.5 | 102 180 186 | MHz |
| V _{ONL} | Maximum Feed-Through On Loss | V_{IS} = 0 dBm @ 10 kHz V_{IS} centered between V_{CC} and GND | 2.0 3.0 4.5 | -2.2 -0.8 -0.4 | dB |
| V _{ISO} | Off-Channel Isolation | $f = 100 \text{ kHz}$ $V_{IS} = 1.0 \text{ V RMS}$ $V_{IS} \text{ centered between } V_{CC} \text{ and GND}$ | 2.0 3.0 4.5 | -73 -74 -75 | dB |
| Q | Charge Injection Enable Input to Common I/O | V_{IS} = V_{CC} to GND, F_{IS} = 20 kHz t_r = t_f = 3.0 nS R_{IS} = 0 Ω , C_L = 100 pF | 3.0 5.5 | 4.8 7.5 | pC |
| THD | Total Harmonic Distortion TDH + Noise | $\begin{aligned} F_{IS} &= 10 \text{ Hz to } 100 \text{ kHz}, \\ R_L &= R_{gen} = 600 \ \Omega, \ C_L = 50 \text{ pF} \\ V_{IS} &= 3.0 \ V_{PP} \text{ Sine Wave} \\ V_{IS} &= 5.0 \ V_{PP} \text{ Sine Wave} \end{aligned}$ | 3.0 5.5 | 0.19 0.06 | % |


DEVICE ORDERING INFORMATION

| | | Device Nomenclature | | | | |
|------------------------|----------------------|---------------------|--------------------|-------------------|------------------|---|
| Device Order Number | Circuit Indicator | Technology | Device Function | Package Suffix | Package Type | Tape and Reel Size |
| NL7WB66USG | NL | AS | 2066 | US | US8 (Pb-Free) | 178 mm (7") 3000 Units / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

TIMING INFORMATION

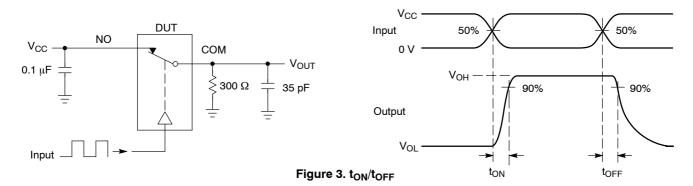

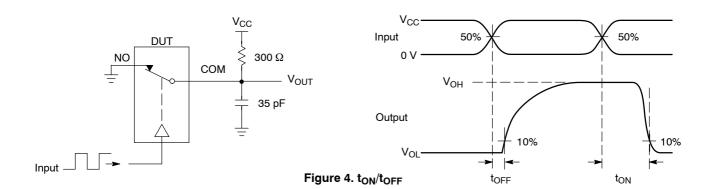


Reference OUT ONO ONO

$$\begin{split} &V_{ISO} = \text{Off Channel Isolation} = 20 \text{ Log } \left(\frac{\text{VOUT}}{\text{VIN}}\right) &\text{for V}_{IN} \text{ at } 100 \text{ kHz} \\ &V_{ONL} = \text{On Channel Loss} = 20 \text{ Log } \left(\frac{\text{VOUT}}{\text{VIN}}\right) &\text{for V}_{IN} \text{ at } 100 \text{ kHz to } 50 \text{ MHz} \end{split}$$

Bandwidth (BW) = the frequency 3 dB below V_{ONL}


Figure 5. Off Channel Isolation/On Channel Loss (BW)/Crosstalk (On Channel to Off Channel)/V_{ONL}

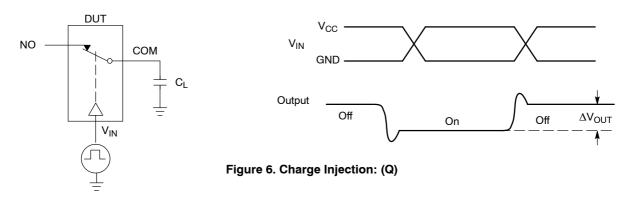

PACKAGE DIMENSIONS

US8 **US SUFFIX** CASE 493-02

ISSUE B

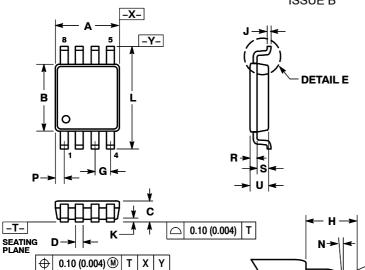

NOTES:


R 0.10 TYP

- I DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: MILLIMETERS. 3. DIMENSION "A" DOES NOT INCLUDE MOLD
- FLASH, PROTRUSION OR GATE BURR.
 MOLD FLASH, PROTRUSION AND GATE BURR SHALL NOT EXCEED 0.140 MM
- 0.0055") PER SIDE.
 DIMENSION "B" DOES NOT INCLUDE
 INTER-LEAD FLASH OR PROTRUSION.
 INTER-LEAD FLASH AND PROTRUSION SHALL NOT E3XCEED 0.140 (0.0055") PER SIDE.
- LEAD FINISH IS SOLDER PLATING WITH THICKNESS OF 0.0076-0.0203 MM. (300–800 "). ALL TOLERANCE UNLESS OTHERWISE
- SPECIFIED ±0.0508 (0.0002 ").

| | MILLIN | IETERS | INC | HES | |
|-----|--------|--------|-----------|-------|--|
| DIM | MIN | MAX | MIN | MAX | |
| Α | 1.90 | 2.10 | 0.075 | 0.083 | |
| В | 2.20 | 2.40 | 0.087 | 0.094 | |
| С | 0.60 | 0.90 | 0.024 | 0.035 | |
| D | 0.17 | 0.25 | 0.007 | 0.010 | |
| F | 0.20 | 0.35 | 0.008 | 0.014 | |
| G | 0.50 | BSC | 0.020 BSC | | |
| Н | 0.40 | REF | 0.016 REF | | |
| J | 0.10 | 0.18 | 0.004 | 0.007 | |
| K | 0.00 | 0.10 | 0.000 | 0.004 | |
| L | 3.00 | 3.20 | 0.118 | 0.126 | |
| M | 0° | 6° | 0° | 6° | |
| N | 5 ° | 10 ° | 5° | 10 ° | |
| Р | 0.23 | 0.34 | 0.010 | 0.013 | |
| R | 0.23 | 0.33 | 0.009 | 0.013 | |
| S | 0.37 | 0.47 | 0.015 | 0.019 | |
| U | 0.60 | 0.80 | 0.024 | 0.031 | |
| ٧ | 0.12 | BSC | 0.005 | BSC | |

SOLDERING FOOTPRINT*

DETAIL E

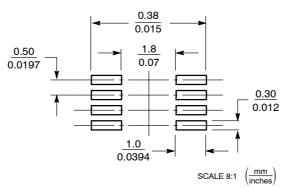

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and un are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice on semiconductor and are registered readerlands of semiconductor Components industries, Ite (SCILLC) . Solitude services are inject to make triangles without further holice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada

Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative