

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	25	Vdc
Drain-Gate Voltage	V_{DG1} V_{DG2}	30 30	Vdc
Drain Current	I_D	30	mAdc
Gate Current	I_{G1R} I_{G1F} I_{G2R} I_{G2F}	-10 10 -10 10	mAdc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	300 1.71	mW mW/ $^\circ\text{C}$
Lead Temperature, 1/16" From Seated Surface for 10 seconds	T_L	260	$^\circ\text{C}$
Storage Channel Temperature Range	T_{stg}	-65 to +175	$^\circ\text{C}$
Operating Channel Temperature	$T_{channel}$	175	$^\circ\text{C}$

3N209

TO-72



DUAL-GATE MOSFET
UHF COMMUNICATIONS

N-CHANNEL — DEPLETION

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Drain-Source Breakdown Voltage ($I_D = 10 \mu\text{Adc}$, $V_{G1S} = -4.0 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$)	$V_{(BR)DSX}$	25	—	—	Vdc
Gate 1 — Source Forward Breakdown Voltage ($I_{G1} = 10 \mu\text{Adc}$, $V_{G2S} = V_{DS} = 0$)	$V_{(BR)G1SSF}$	7.0	—	22	Vdc
Gate 1 — Source Reverse Breakdown Voltage ($I_{G1} = -10 \mu\text{Adc}$, $V_{G2S} = V_{DS} = 0$)	$V_{(BR)G1SSR}$	-7.0	—	-22	Vdc
Gate 2 — Source Forward Breakdown Voltage ($I_{G2} = 10 \mu\text{Adc}$, $V_{G1S} = V_{DS} = 0$)	$V_{(BR)G2SSF}$	7.0	—	22	Vdc
Gate 2 — Source Reverse Breakdown Voltage ($I_{G2} = -10 \mu\text{Adc}$, $V_{G1S} = V_{DS} = 0$)	$V_{(BR)G2SSR}$	-7.0	—	-22	Vdc
Gate 1 — Terminal Forward Current ($V_{G1S} = 6.0 \text{ Vdc}$, $V_{G2S} = V_{DS} = 0$)	I_{G1SSF}	—	—	20	nAdc
Gate 1 — Terminal Reverse Current ($V_{G1S} = -6.0 \text{ Vdc}$, $V_{G2S} = V_{DS} = 0$) ($V_{G1S} = -6.0 \text{ Vdc}$, $V_{G2S} = V_{DS} = 0$, $T_A = 150^\circ\text{C}$)	I_{G1SSR}	—	—	-20 -10	μAdc
Gate 2 — Terminal Forward Current ($V_{G2S} = 6.0 \text{ Vdc}$, $V_{G1S} = V_{DS} = 0$)	I_{G2SSF}	—	—	20	nAdc
Gate 2 — Terminal Reverse Current ($V_{G2S} = -6.0 \text{ Vdc}$, $V_{G1S} = V_{DS} = 0$) ($V_{G2S} = -6.0 \text{ Vdc}$, $V_{G1S} = V_{DS} = 0$, $T_A = 150^\circ\text{C}$)	I_{G2SSR}	—	—	-20 -10	μAdc
ON CHARACTERISTICS					
Gate 1 — Zero Voltage Drain Current ($V_{DS} = 15 \text{ Vdc}$, $V_{G1S} = 0$, $V_{G2S} = 4.0 \text{ Vdc}$)	I_{DSS}	5.0	—	30	mAdc
SMALL-SIGNAL CHARACTERISTICS					
Forward Transfer Admittance ($V_{DS} = 15 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$, $I_D = 10 \mu\text{Adc}$, $f = 1.0 \text{ kHz}$)	Y_{fs}	10	13	20	mmhos
Input Capacitance ($V_{DS} = 15 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$, $I_D \geq 5.0 \mu\text{Adc}$, $f = 1.0 \text{ MHz}$)	C_{iss}	—	3.3	7.0	pF
Reverse Transfer Capacitance ($V_{DS} = 15 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$, $I_D \geq 5.0 \mu\text{Adc}$, $f = 1.0 \text{ MHz}$)	C_{rss}	0.005	0.023	0.03	pF
Output Capacitance ($V_{DS} = 15 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$, $I_D \geq 5.0 \mu\text{Adc}$, $f = 1.0 \text{ MHz}$)	C_{oss}	0.5	2.0	4.0	pF

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.




3N209

ELECTRICAL CHARACTERISTICS (continued) ($T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
FUNCTIONAL CHARACTERISTICS					
Noise Figure ($V_{DS} = 15 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$, $I_D = 10 \text{ mAdc}$, $f = 500 \text{ MHz}$)	NF	—	4.0	6.0	dB
Common Source Power Gain (Figure 12) ($V_{DS} = 15 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$, $I_D = 10 \text{ mAdc}$, $f = 500 \text{ MHz}$)	G_{ps}	10	13	20	dB
*Bandwidth ($V_{DS} = 15 \text{ Vdc}$, $V_{G2S} = 4.0 \text{ Vdc}$, $I_D = 10 \text{ mAdc}$, $f = 500 \text{ MHz}$)	BW	7.0	—	17	MHz

FIGURE 1 – MOSFET CIRCUIT SCHEMATIC



TYPICAL SCATTERING PARAMETERS

FIGURE 2 – S_{11} , INPUT REFLECTION COEFFICIENT versus FREQUENCY

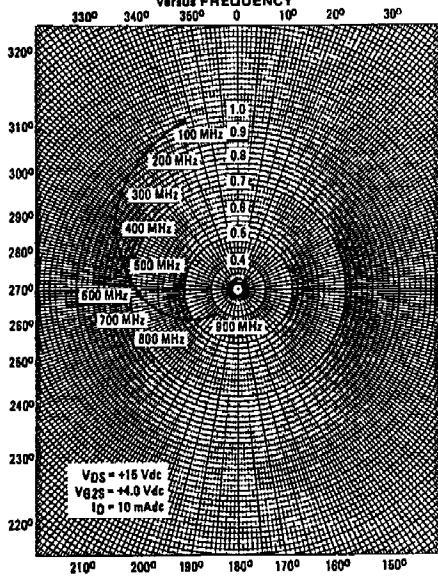


FIGURE 3 – S_{12} , REVERSE TRANSMISSION COEFFICIENT versus FREQUENCY

